



READ BEFORE YOU START

THIS LUMINAIRE IS TO BE INSTALLED IN ACCORDANCE WITH LOCAL CODES AND THE NATIONAL ELECTRIC CODE (NFPA70). FAILURE TO FOLLOW THESE CODES AND INSTRUCTIONS MAY RESULT IN SERIOUS INJURY, PROPERTY DAMAGE AND VOID THE WARRANTY. THESE INSTRUCTIONS DO NOT COVER ALL TYPES OF INSTALLATION AND MOUNTING, OPERATION OR MAINTENANCE.



WARNING! - HOT

THE LUMINAIRE, LENS, AND SURROUNDING METAL COMPONENTS CAN BECOME VERY HOT DURING OPERATION, POSING A BURN RISK. AVOID INSTALLING FIXTURES IN AREAS ACCESSIBLE TO CHILDREN, ESPECIALLY WHEN USING HIGH-WATTAGE LAMPS, AND KEEP FLAMMABLE MATERIALS CLEAR OF THE UNIT. ALWAYS ALLOW THE FIXTURE TO COOL COMPLETELY BEFORE HANDLING OR PERFORMING MAINTENANCE.



WARNING! - SHOCK HAZARD

DO NOT INSTALL WITHIN 10 FEET (3M) OF POOLS, SPAS, OR FOUNTAINS.

TURN POWER OFF BEFORE INSTALLING OR SERVICING COMPONENTS.

TOOLS/SUPPLIES NEEDED:

- GM Lighting G4 LED series lamp
- Direct-burial connectors
- Low voltage direct burial cable
- Wire cutters/strippers
- Hammer
- Wooden Board
- Shovel

PARTS INCLUDED:

- ILS-P400-XX: Light fixture
- ILS-A100P: Fixture stake

IMPORTANT SAFETY GUIDE:

- It is recommended to use a qualified electrician for installation or maintenance.
- Use only low-voltage landscape power supplies ($\leq 300W, 25A, 12V-15V$).
- Use G4 LED lamps ($\leq 4W$ MAX).
- Only use wire connectors suitable for direct burial and outdoor use.
- Position the low voltage cable and wire connectors within 6 inches (15.2 cm) from a building structure, a luminaire or fitting.
- Low voltage cable is intended for shallow burial - less than 6 inches (15.2 mm).

FIG. 1a

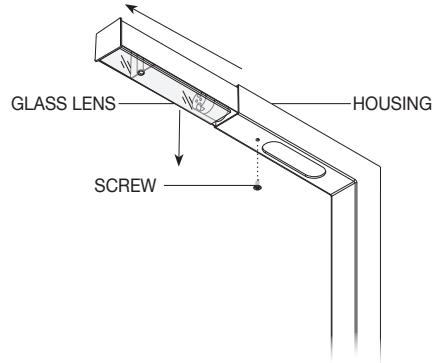


FIG. 1b





FIG. 1c

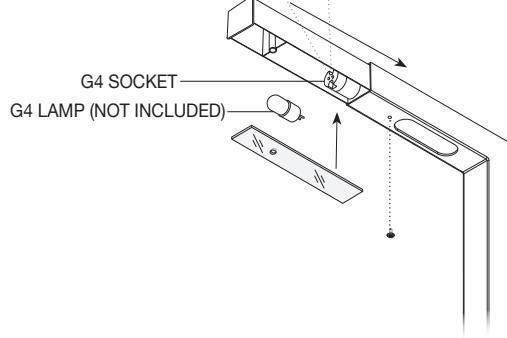

INSTALLATION STEPS 1-10

Step 1: Unpack and Verify Parts

Confirm that all necessary parts are included.

Step 2: Locate Screw

Locate the single screw on the front face of the fixture. Using a Phillips screwdriver, fully remove the screw. Slide the lamp housing out of the fixture and remove the lens to gain access to the lamp housing. (FIG 1a)

Step 3: Install the Lamp

Insert the GM Lighting G4 Series lamp (MAX 4W) into the lamp housing, aligning the lamp base with the socket. Ensure the lamp pins are properly seated and securely held in place. (FIG 1b)

Step 4: Retighten Faceplate

Place the lens cover over the lamp housing, ensuring it is fully seated and properly aligned. Carefully slide the housing assembly back into the fixture until it sits flush with the fixture body. Insert the single screw into the front face of the fixture and, using a Phillips screwdriver, tighten the screw until the housing and lens are securely fastened.




INSTALLATION STEPS

Step 5: Position and Insert the Stake

Position the assembled fixture stake at the desired ground location and firmly insert it into the ground. For hard ground, hammer the stake using a board on top to prevent damage. (FIG. 2)


FIG. 2

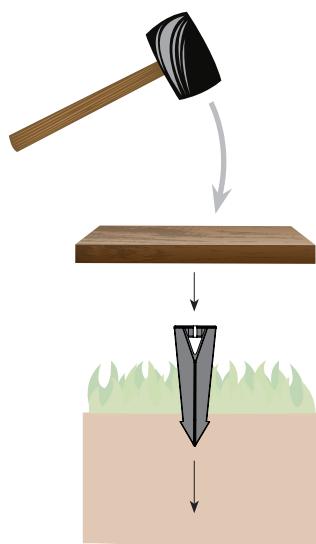

Step 6: Feed the Fixture Wire

Insert fixture wire through stake slot or hole. (FIG. 3)

FIG. 3

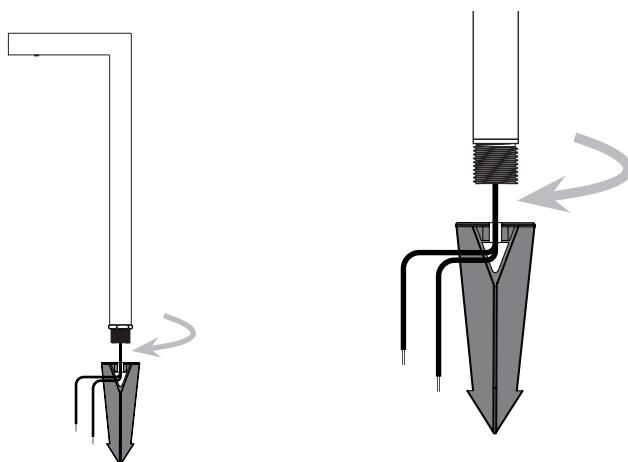

Step 7: Secure the Fixture to the Stake

Align the fixture's 1/2" NPS threads with the stake's opening. Twist the fixture clockwise onto the stake until fully tightened. Locknut may then be tightened against stake to secure position. Confirm the fixture is stable, upright, and properly aligned. (FIG. 3)


Step 8: Bury the Low-Voltage Cable

Bury the main low-voltage cable no deeper than 6 inches (15.2 cm) underground. Keep wire a minimum of 6 inches from building structures (e.g., house, deck). Excess cable can be cut but leave some extra wire for handling and repositioning the fixture.

Step 9: Strip and Connect Wires

Separate wires and strip back insulation 1/2". Use with direct burial wire nuts or other terminal connectors to secure connections. (FIG. 4)

FIG. 4

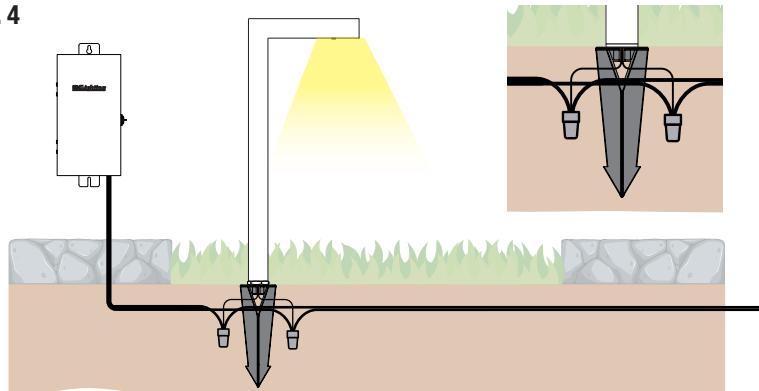

Step 10: Power On and Test

Once all connections are secure, turn on the power supply to test operation. When the fixture lights up adjust fixture