

NeoVision24 SideFlex

24VDC 3W LED Tape Specification Sheet



Project Name	Type
Catalog #	Date

PRODUCT OVERVIEW

A 24VDC high transmission, flexible linear 'neon' tape that is field cuttable and joinable. Designed for applications that require ultra-rich light and color saturation that is characteristic of neon. SideFlex enables horizontal bending that conforms tape around curvilinear surfaces



FEATURES

- 24VDC operation
- Wet location - IP65
- Multiple power feed options
- Tape encased in UV stable silicone (UV protected)
- Dimmable
- 3000K or 4000K / Amber, Blue, Green or Red
- 120° viewing angle
- Maximum run: 32'-8"
- Field cuttable and joinable in 2 inch increments while retaining IP65
- No tools required for capping and joining
- Mounting clips included (recommend use 1 per foot)

SPECIFICATIONS

ELECTRICAL

- 24VDC
- 3.0 watts per foot

OPTICS

- 90+ CRI

WARRANTY


- 5-year warranty when paired with GM power supply

CERTIFICATION

- 24VDC UL compliant
- IP65

ACCESSORIES

- LineDRIVE 24V Power Supplies
- Aluminum Channels (below)
- Connectors (below)
- Tape Cutting Tool (below)

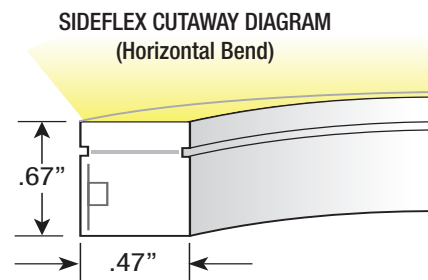

ORDERING INFORMATION

Model	Watts / Foot	Color Temp.	Reel Length
NV24S	3W	3000K (30K)	16 (16'-4")
		4000K (40K)	32 (32'-8")
		Amber (AM)	
		Blue (BL)	
		Green (GR)	
		Red (RD)	

Every reel includes (1) NV24S-PF-EF (tape to power feed with 48" of lead.). 16' reel includes (16) NV24S-MC-A mounting clips and screws. 32' reel comes with (32) NV24S-MC-A mounting clips and screws. Operating temp.: -4° - 130°F.

Example: NV24S-3W-30K-16

CONNECTORS

Catalog No.	Description
NV24S-PF-EF8	Tape to power flexible end feed - 8 ft. length
NV24S-PF-BF8	Tape to power flexible bottom feed - 8 ft. length
NV24S-SP	Tape to tape splice connector
NV24S-CHL-A4	Aluminum channel - 4 ft. length
NV24S-CHL-A8	Aluminum channel - 8 ft. length
NV24S-MC-A	Aluminum mounting clips (set of 20)

Catalog No.	Description
NV24S-TTC6	Tape to tape 6" flexible connector
NV24S-TTC12	Tape to tape 12" flexible connector
NV24S-TTC24	Tape to tape 24" flexible connector
NV24S-FLEX-CHL	Flexible mounting channel - 39.5"
NV24-CT	Tape cutting tool
NV24S-EC	End cap

The above connectors, channels, mounting clips and caps are for the exclusive use of NeoVision24 SideFlex Neon Tape and are ordered separately. See website for accessory images.



NeoVision24 SideFlex

24VDC 3W LED Tape Specification Sheet



Catalog No.	Length	Lumens per Foot	CRI	Color Temp.	Max. Run
NV24S-3W-30K-16	16'-4"	128	90+	3000K	32'-8"
NV24S-3W-30K-32	32'-8"	128	90+	3000K	32'-8"
NV24S-3W-40K-16	16'-4"	128	90+	4000K	32'-8"
NV24S-3W-40K-32	32'-8"	128	90+	4000K	32'-8"
NV24S-3W-AM-16	16'-4"	N/A	90+	AMBER	32'-8"
NV24S-3W-AM-32	32'-8"	N/A	90+	AMBER	32'-8"
NV24S-3W-BL-16	16'-4"	N/A	90+	BLUE	32'-8"
NV24S-3W-BL-32	32'-8"	N/A	90+	BLUE	32'-8"
NV24S-3W-GR-16	16'-4"	N/A	90+	GREEN	32'-8"
NV24S-3W-GR-32	32'-8"	N/A	90+	GREEN	32'-8"
NV24S-3W-RD-16	16'-4"	N/A	90+	RED	32'-8"
NV24S-3W-RD-32	32'-8"	N/A	90+	RED	32'-8"

Kelvin temperature (color) ±100K.

Every reel includes (1) NV24S-PF-EF (tape to power feed with 48" of lead.). 16' reel includes (16) NV24S-MC-A mounting clips and screws. 32' reel comes with (32) NV24S-MC-A mounting clips and screws. Operating temp.: -4° - 130°F.

DIMENSIONS

