

PRODUCT OVERVIEW

What's new in ceiling lighting? How about illumination from the grid, and not the panel? GM Lighting's GridTask 120V-277V LED Illuminated Grid System is a dimmable, low profile (1/2") lighting system available in two grid types: 9/16" and 15/16" that provides for a lensed linear light source integral to a ceiling grid. Configure linear lines or patterns.

KEY FEATURES

- 120V-277V
- 3500K, 4000K
- 0-10 dimming*
- Tool-less installation (no tools required)
- Fully illuminated corners
- Can be configured for square or rectangular patterns
- 2' (10W) or 4' (20W) grid
- 9/16" and 15/16"
- Low profile - 1/2"
- 120° beam spread
- Fixture includes grid
- Suitable for damp location
- 5-year warranty

ELECTRICAL

- 120V-277V (see required power supplies below)

OPTICS


- 80+ CRI
- 3500K, 4000K
- Frosted lens

CERTIFICATION

- UL listed

WARRANTY

- 5 year warranty

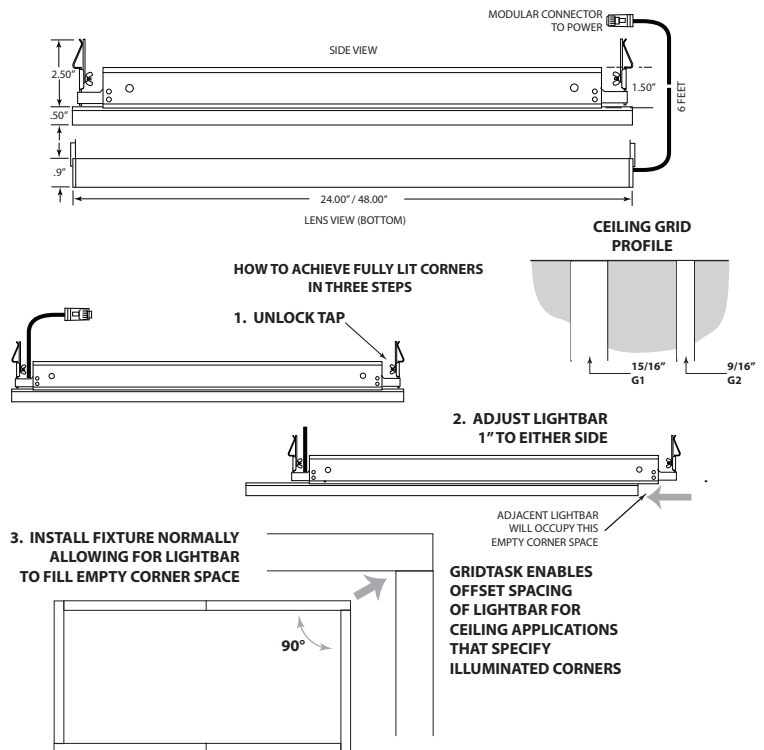

POWER SUPPLIES

Catalog No.	Description
TGB-2-PS-30	2 ft. power supply, 30W, max. 3 bars
TGB-4-PS-60	4 ft. power supply, 60W, max 3 bars
TGB-2-EM8W	30 Max./3 Bar - Plug & Play w/Emerg. Batt. - 90 min.
TGB-4-EM8W	60 Max./3 Bar - Plug & Play w/Emerg. Batt. - 90 min.
TGB-4-EXT-12	T-Grid LED Linear Bar 12ft. Black CATS Cable Power Feed Extender

* Dimming Note: DIVA-DVTV (Lutron), NOVA-NTSTV-TV

PRODUCT ORDERING

Catalog No.	Dimensions	Wattage	Lumens	Color Temp.	Finish
TGB-2-35-G1	2' grid for 15/16" std. grid	10W	1300	3500K	Frosted White
TGB-2-35-G2	2' grid for 9/16" std. grid	10W	1300	3500K	Frosted White
TGB-2-40-G1	2' grid for 15/16" std. grid	10W	1300	4000K	Frosted White
TGB-2-40-G2	2' grid for 9/16" std. grid	10W	1300	4000K	Frosted White
TGB-4-35-G1	4' grid for 15/16" std. grid	20W	2600	3500K	Frosted White
TGB-4-35-G2	4' grid for 9/16" std. grid	20W	2600	3500K	Frosted White
TGB-4-40-G1	4' grid for 15/16" std. grid	20W	2600	4000K	Frosted White
TGB-4-40-G2	4' grid for 9/16" std. grid	20W	2600	4000K	Frosted White