

LTR-P Professional Series

1.5W, 12VDC and 24VDC LED Tape Specification Sheet

GM Lighting®

PRODUCT OVERVIEW

GM's Professional Series Flexible LED Tape combines style and technology with reliability. Designed for professional installations that demand a high level of quality, the LTR-P Series includes a wide array of key features and is available in 16'-4" (5M), 100' (30M) and 250' (76M) reels.

FEATURES

- 12VDC or 24VDC models
- 2400K, 2700K, 3000K, 3500K, 4000K and 5000K color temps
- Maximum run on a given lead is 32'-8" (12V) and 60' (24V)
- Remote control with GM's LUXcontrol™ App and controllers
- Custom lengths available - consult factory
- Includes Sure-Tite connectors
- 120 LEDs per meter
- Cuttable every 2"
- Dry location
- Premium diodes
- 120° viewing angle
- 3M adhesive back
- Dimmable

SPECIFICATIONS

ELECTRICAL

- 12V/24V
- 1.5 watts per foot

OPTICS

- 90+ CRI

OPERATING TEMP

- -4 to 122 F

CERTIFICATION

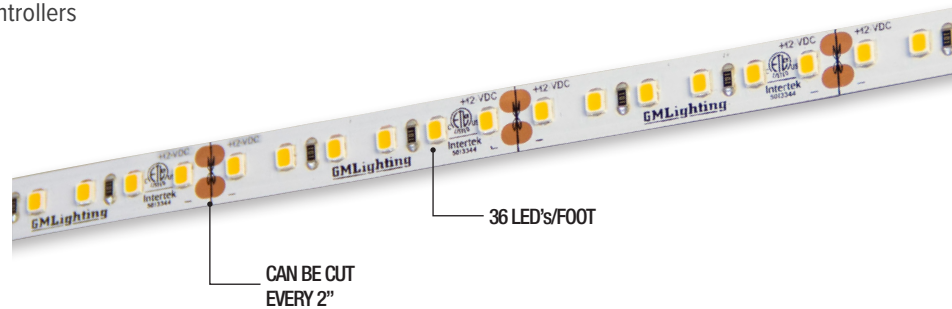
- ETL (12V) / UL (24V)
- Title 24 compliant when used with specific drivers. Consult factory.
- Class 2
- Closet Rated: Complies with NEC code (NFPA70) 410.16, Suitable for installation within the clothes closet storage space

WARRANTY

- 5-year warranty when paired with GM power supply

Project Name	Type
--------------	------

Catalog #	Date
-----------	------



ORDERING INFORMATION

Example: LTR-P-12V-1.5W-24K-16

Model	-	Series	-	Voltage	-	Wattage	-	Color Temp	-	Reel Length
LTR		P		12V		1.5W		24K		16
								27K		
				24V				30K	100	
								35K		
								40K		250
								50K		

*Reel Length: 16 = 16'-4", 100 = 98'-6", 250 = 250'
250ft. reels available in 27K, 30K and 35K only

ACCESSORIES

Model	Description
ESTC-1	Sure-Tite tape to tape connector
ESTC-90	Sure-Tite 90° connector
ESTLK-60	Sure-Tite 60" adjustable tape to tape connector
ESTW-60	Sure-Tite 60" adjustable tape to power connector
ESTW-CO	Sure-Tite tape to power supply connector (no wire)

Your LED Tape Specification Checklist:

1. Select Tape
2. Select Connectors
3. Select Channels
4. Select Controllers or Dimmers
5. Select Power Supplies

Install Sheet



LTR-P Professional Series

1.5W, 12VDC and 24VDC LED Tape Specification Sheet

GMLighting®

Catalog No.	Length	Lumens	CRI	Color Temp.	Max. Run
LTR-P-12V-1.5W-24K-16	16'-4" / 5M	102	90+	2400K	32'-8"
LTR-P-12V-1.5W-27K-16	16'-4" / 5M	107	90+	2700K	32'-8"
LTR-P-12V-1.5W-30K-16	16'-4" / 5M	113	90+	3000K	32'-8"
LTR-P-12V-1.5W-35K-16	16'-4" / 5M	119	90+	3500K	32'-8"
LTR-P-12V-1.5W-40K-16	16'-4" / 5M	126	90+	4000K	32'-8"
LTR-P-12V-1.5W-50K-16	16'-4" / 5M	130	90+	5000K	32'-8"
LTR-P-12V-1.5W-24K-100	98'-6" / 30M	102	90+	2400K	32'-8"
LTR-P-12V-1.5W-27K-100	98'-6" / 30M	107	90+	2700K	32'-8"
LTR-P-12V-1.5W-30K-100	98'-6" / 30M	113	90+	3000K	32'-8"
LTR-P-12V-1.5W-35K-100	98'-6" / 30M	119	90+	3500K	32'-8"
LTR-P-12V-1.5W-40K-100	98'-6" / 30M	126	90+	4000K	32'-8"
LTR-P-12V-1.5W-50K-100	98'-6" / 30M	130	90+	5000K	32'-8"
LTR-P-12V-1.5W-27K-250	250' / 76M	107	90+	2700K	32'-8"
LTR-P-12V-1.5W-30K-250	250' / 76M	113	90+	3000K	32'-8"
LTR-P-12V-1.5W-35K-250	250' / 76M	119	90+	3500K	32'-8"
LTR-P-24V-1.5W-24K-16	16'-4" / 5M	102	90+	2400K	60'
LTR-P-24V-1.5W-27K-16	16'-4" / 5M	107	90+	2700K	60'
LTR-P-24V-1.5W-30K-16	16'-4" / 5M	113	90+	3000K	60'
LTR-P-24V-1.5W-35K-16	16'-4" / 5M	119	90+	3500K	60'
LTR-P-24V-1.5W-40K-16	16'-4" / 5M	126	90+	4000K	60'
LTR-P-24V-1.5W-50K-16	16'-4" / 5M	130	90+	5000K	60'
LTR-P-24V-1.5W-24K-100	98'-6" / 30M	102	90+	2400K	60'
LTR-P-24V-1.5W-27K-100	98'-6" / 30M	107	90+	2700K	60'
LTR-P-24V-1.5W-30K-100	98'-6" / 30M	113	90+	3000K	60'
LTR-P-24V-1.5W-35K-100	98'-6" / 30M	119	90+	3500K	60'
LTR-P-24V-1.5W-40K-100	98'-6" / 30M	126	90+	4000K	60'
LTR-P-24V-1.5W-50K-100	98'-6" / 30M	130	90+	5000K	60'
LTR-P-24V-1.5W-27K-250	250' / 76M	107	90+	2700K	60'
LTR-P-24V-1.5W-30K-250	250' / 76M	113	90+	3000K	60'
LTR-P-24V-1.5W-35K-250	250' / 76M	119	90+	3500K	60'

Kelvin temperature (color) ±100K.

16'-4" and 100' reel includes 48" lead affixed to tape. 16'-4" reel includes (3) ESTW-60 Sure-Tite connectors. 100' reel includes (10) ESTW-60 Sure-Tite connectors

COMPATIBLE CONTROLLERS

Model	Description
SHWC	LUXcontrol Smart 2.4 GHz WiFi Controller, Standard 12V/24V Low Voltage
SHWD	LUXcontrol Smart 2.4 GHz WiFi Dimmer, Standard 12V/24V Low Voltage
SWDD60W12V	SwitchLD All-in-One Dimmer and Driver, 60W, 12VDC
SWDD60W24V	SwitchLD All-in-One Dimmer and Driver, 60W, 24VDC
HC-RF-UNV-5CH	Universal 1-5 Channel RF Remote Control
CM-RF-UNV-5CH	Universal 1-5 Channel Control Module
RPT-UNV-5CH	Universal 1-5 Channel Repeater Amplifier

LTR-P Professional Series

1.5W, 12VDC and 24VDC LED Tape Specification Sheet

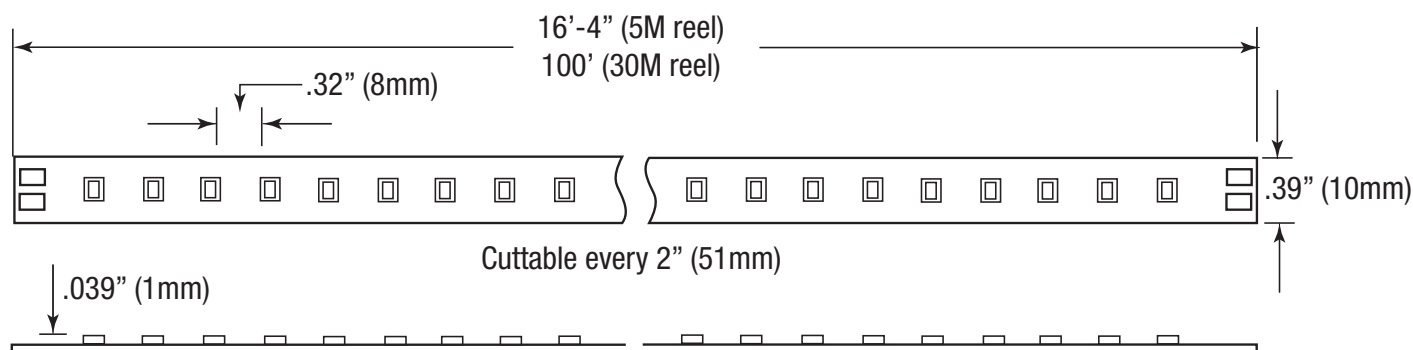
GMLighting®

RECOMMENDED DRIVERS

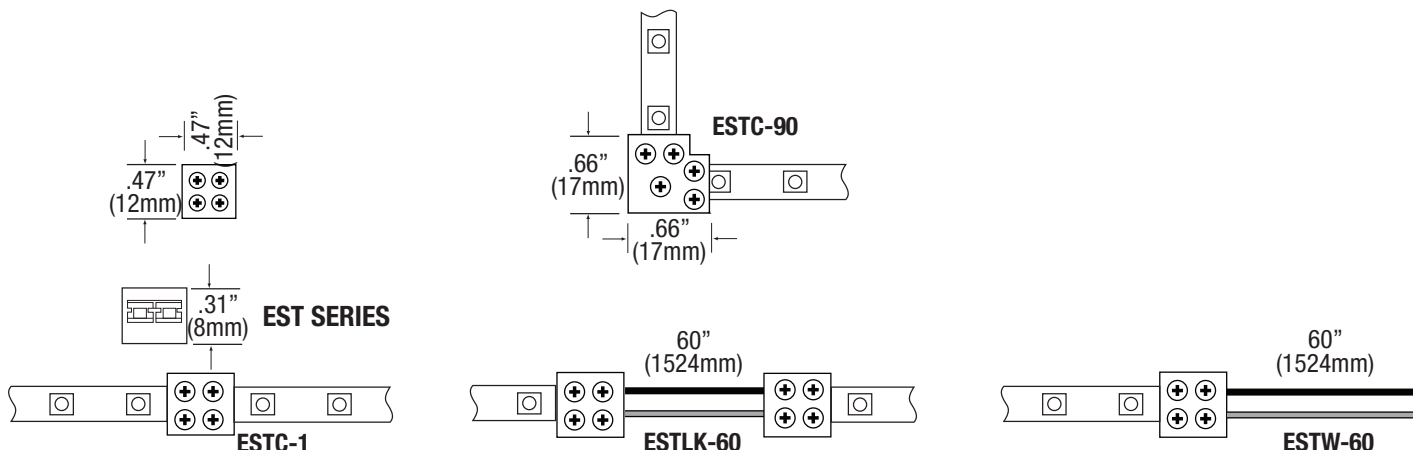
Catalog No.	Description	Watts	Specification Sheet
LD-XD-UNV	LineDrive Electronic Multi-Dimmable Power Supply, 12VDC or 24VDC	20W, 40W, 60W, 96W, 180W, 200W, 300W	View Spec Sheet
LD-MD-UNV	LineDrive Magnetic Dimmable Power Supply, 12VDC or 24VDC	30W, 60W, 96W, 150W, 200W, 300W	View Spec Sheet
LD-EDM	LineDrive Electronic Dimmable MINI Power Supply, 12VDC/24VDC	60W	View Spec Sheet
LD-ED010	LineDrive Electronic Dimmable 0-10V Power Supply, 12VDC or 24VDC	60W, 96W	View Spec Sheet
LTP	Cord and Plug Power Supply, 12VDC or 24VDC	25W, 48W, 60W, 90W	View Spec Sheet
PSD	Electronic Dimmable Power Supply, 12VDC or 24VDC	15W, 24W, 60W, 90W	View Spec Sheet

Please see our website for updated power supply specifications and information.

DIMENSION



EST SERIES CONNECTORS




LTR-P Professional Series

1.5W, 12VDC and 24VDC LED Tape Specification Sheet


GMLighting®

COMPATIBLE CHANNELS - FIT CONNECTORS ON PG. 1


EXTRA DEEP

Catalog No.	Description	Length	Dimensions
LED-CHL-XD	Extra deep format extruded channel. Includes snap-on frosted lens with mounting clips and screws.	4'	
LED-CHL-XD-6	Extra deep format extruded channel. Includes snap-on frosted lens with mounting clips and screws.	6'	
LED-CHL-XD-AMC	(2) Adjustable mounting brackets for LED-CHL-XD	N/A	
LED-CHL-XD-EC	(2) End caps for LED-CHL-XD. One solid, one with hole.	N/A	
LED-CHL-XD-MC	(2) Mounting clips and screws for LED-CHL-XD	N/A	


EXTRA DEEP FLANGED

LED-CHL-XD-F	Extra deep format extruded channel with flange. Includes snap-on frosted lens with mounting clips and screws.	4'	
LED-CHL-XD-F-6	Extra deep format extruded channel with flange. Includes snap-on frosted lens with mounting clips and screws.	6'	
LED-CHL-XD-F-DC	(2) Drywall mounting brackets for LED-CHL-XD-F	N/A	
LED-CHL-XD-F-EC	(2) End caps for LED-CHL-XD-F. One solid, one with hole.	N/A	

MINI DEEP

LED-CHL-XD-MD	Mini deep format extruded channel. Includes snap-on frosted lens with mounting clips and screws.	4'	
LED-CHL-XD-MD-WH	Mini deep format extruded channel. Includes snap-on frosted lens with mounting clips and screws. White.	4'	
LED-CHL-XD-MD-B	Mini deep format extruded channel. Includes snap-on frosted lens with mounting clips and screws. Black.	4'	
LED-CHL-XD-MD-6	Mini deep format extruded channel with flange. Includes snap-on frosted lens with mounting clips and screws.	6'	
LED-CHL-XD-MD-6-WH	Mini deep format extruded channel. Includes snap-on frosted lens with mounting clips and screws. White.	6'	
LED-CHL-XD-MD-6-B	Mini deep format extruded channel. Includes snap-on frosted lens with mounting clips and screws. Black.	6'	
LED-CHL-XD-MD-AMC	(2) Adjustable mounting brackets for LED-CHL-XD-MD	N/A	
LED-CHL-XD-MD-EC	(2) End caps for LED-CHL-XD-MD. One solid, one with hole.	N/A	
LED-CHL-XD-MD-MC	(2) Mounting clips for LED-CHL-XD-MD	N/A	

MINI DEEP FLANGED

LED-CHL-XD-MD-F	Mini deep format flanged extruded channel with flange. Includes snap-on frosted lens with mounting clips and screws.	4'	
LED-CHL-XD-MD-F-WH	Mini deep format flanged extruded channel with flange. Includes snap-on frosted lens with mounting clips and screws. White.	4'	
LED-CHL-XD-MD-F-B	Mini deep format flanged extruded channel with flange. Includes snap-on frosted lens with mounting clips and screws. Black.	4'	
LED-CHL-XD-MD-F-6	Mini deep format extruded flanged channel with flange. Includes snap-on frosted lens with mounting clips and screws.	6'	
LED-CHL-XD-MD-F-6-WH	Mini deep format extruded flanged channel with flange. Includes snap-on frosted lens with mounting clips and screws. White.	6'	
LED-CHL-XD-MD-F-6-B	Mini deep format extruded flanged channel with flange. Includes snap-on frosted lens with mounting clips and screws. Black.	6'	
LED-CHL-XD-MD-F-DC	(2) Drywall mounting brackets for LED-CHL-XD-MD-F	N/A	
LED-CHL-XD-MD-F-EC	(2) End caps for LED-CHL-XD-MD-F. One solid, one with hole.	N/A	


LTR-P Professional Series

1.5W, 12VDC and 24VDC LED Tape Specification Sheet


GMLighting®

COMPATIBLE CHANNELS- FIT CONNECTORS ON PG. 1


45° ANGLE MOUNT

Catalog No.	Description		Dimensions
LED-CHL-45	Extruded angled (45°) channel. Includes snap-on frosted lens with mounting clips and screws.	4'	
LED-CHL-45-EC	(2) End caps for LED-CHL-45 - one solid, one with hole	N/A	
LED-CHL-45-MC	(2) Mounting clips and screws for LED-CHL-45	N/A	


45° LARGE ANGLE MOUNT

LED-CHL-45-1200	Extruded angled (45°) channel. Includes snap-on frosted lens with mounting clips and screws.	4'	
LED-CHL-45-1200-EC	(2) End caps for LED-CHL-45 - one solid, one with hole	N/A	
LED-CHL-45-1200-MC	(2) Additional mounting clips for LED-CHL-45-1200	N/A	


WIDE

LED-CHL-W	Wide format extruded channel. Includes snap-on frosted lens with mounting clips and screws.	4'	
LED-CHL-W-6	Wide format extruded channel. Includes snap-on frosted lens with mounting clips and screws.	6'	
LED-CHL-W-AMC	(2) Adjustable mounting brackets for LED-CHL-W	N/A	
LED-CHL-W-EC	(2) End caps for LED-CHL-W - one solid, one with hole.	N/A	
LED-CHL-W-MC	(2) Additional mounting clips for LED-CHL-W	N/A	

MUD IN - STANDARD

LED-CHL-MI-ST6	Standard extruded aluminum mud-in channel. Includes snap-on frosted lens.	6'	
LED-CHL-MI-ST-EC	(2) End caps for LED-CHL-MI-ST6 one solid, one with hole.	N/A	

STANDARD STRAIGHT

LED-CHL2-4-CA	Silver channel, white lens (2) mounting clips, (2) screws	4'	
LED-CHL2-4-WH	White channel, white lens (2) mounting clips, (2) screws	4'	
LED-CHL2-4-BK	Black channel, white lens (2) mounting clips, (2) screws	4'	
LED-CHL2-6-CA	Silver channel, white lens, (4) mounting clips, (4) screws	6'	
LED-CHL2-6-WH	White channel, white lens, (4) mounting clips, (4) screws	6'	
LED-CHL2-6-BK	Black channel, white lens, (4) mounting clips, (4) screws	6'	
LED-CHL2 LENS-4-BK	Lens in black for LED-CHL2-4	4'	
LED-CHL2 LENS-6-BK	Lens in black for LED-CHL2-6	6'	
LED-CHL2-ECG	(2) End caps for LED-CHL2-CA: light gray, one solid, one with hole	N/A	
LED-CHL2-ECW	(2) End caps for LED-CHL2-WH: white, one solid, one with hole	N/A	
LED-CHL2-ECB	(2) End caps for LED-CHL2-BK: black, one solid, one with hole	N/A	
LED-CHL2-MC	(2) Mounting clips and (2) screws	N/A	
LED-CHL2-AMC	(2) Adjustable mounting clips and (2) screws	N/A	


LTR-P Professional Series

1.5W, 12VDC and 24VDC LED Tape Specification Sheet


GMLighting®

COMPATIBLE CHANNELS - SOLDERED LEADS ONLY


STANDARD STRAIGHT

Catalog No.	Description		Dimensions
LED-CHL	Extruded channel. Includes snap-on frosted lens with mounting clips and screws.	4'	
LED-CHL-6	Extruded channel. Includes snap-on frosted lens with mounting clips and screws.	6'	
LED-CHL-AMC	(2) Adjustable mounting brackets for LED-CHL	N/A	
LED-CHL-EC	(2) End caps for LED-CHL - one solid, one with hole.	N/A	
LED-CHL-MC	(2) Additional mounting clips for LED-CHL	N/A	

45° MINI ANGLE MOUNT

LED-CHL-45-MINI	Extruded angled (45°) silver channel. Includes snap-on white lens with (2) mounting clips and (2) screws.	4'	
LED-CHL-45-MINI-B	Extruded angled (45°) black channel. Includes snap-on white lens with (2) mounting clips and (2) screws.	4'	
LED-CHL-45-MINI-EC	(2) End caps for LED-CHL-45-MINI: light gray, one solid, one with hole	N/A	
LED-CHL-45-MINI-EC-B	(2) End caps for LED-CHL-MINI-B: black, one solid, one with hole	N/A	
LED-CHL-45-MINI-MC	(2) Mounting clips and (2) screws for LED-CHL-45-MINI	N/A	
LED-CHL-45-M-LENS-BK	Lens in black for LED-CHL-45-MINI	4'	

BENDABLE

LED-CHL-BND-4	Extruded 4' bendable channel. Inc. snap-on frosted lens with screws	4'	
LED-CHL-BND-6	Extruded 6' bendable channel. Inc. snap-on frosted lens with screws	6'	
LED-CHL-BND-EC	(2) end caps for LED-CHL-BND 4' or 6'	N/A	
LED-CHL-BND-MC	(2) mounting clips and screws for LED-CHL-BND 4' or 6'	N/A	

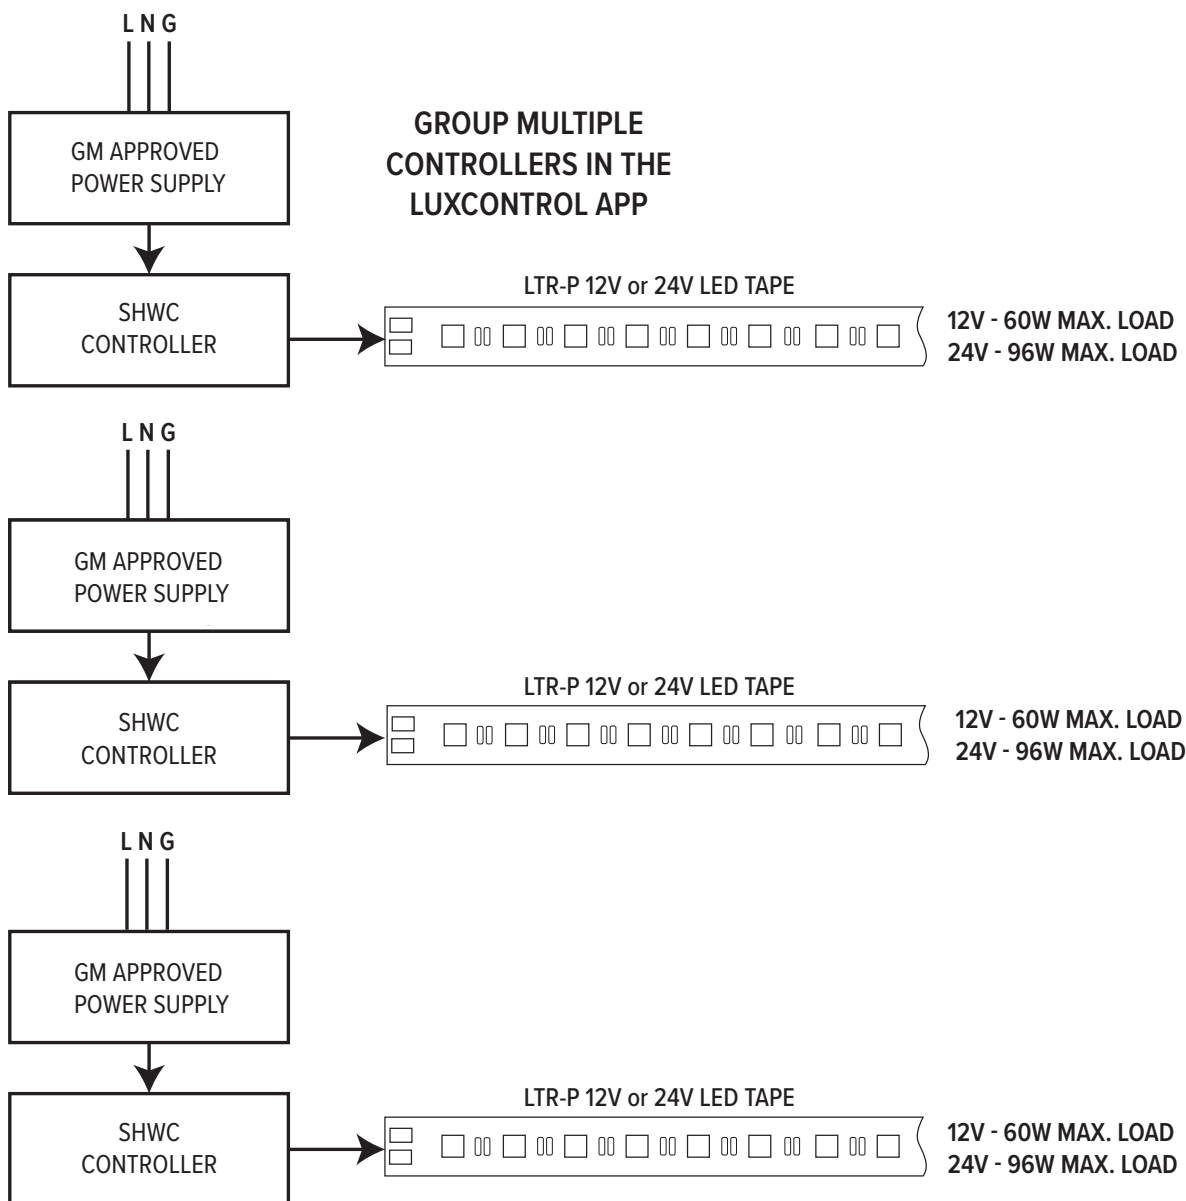
LTR-P Professional Series

1.5W, 12VDC and 24VDC LED Tape Specification Sheet

GMLighting®

SHWC LUXCONTROL WIFI CONTROLLER

NOTE: Power supply **MUST NOT BE DIMMED**
at the input to properly power the controls.



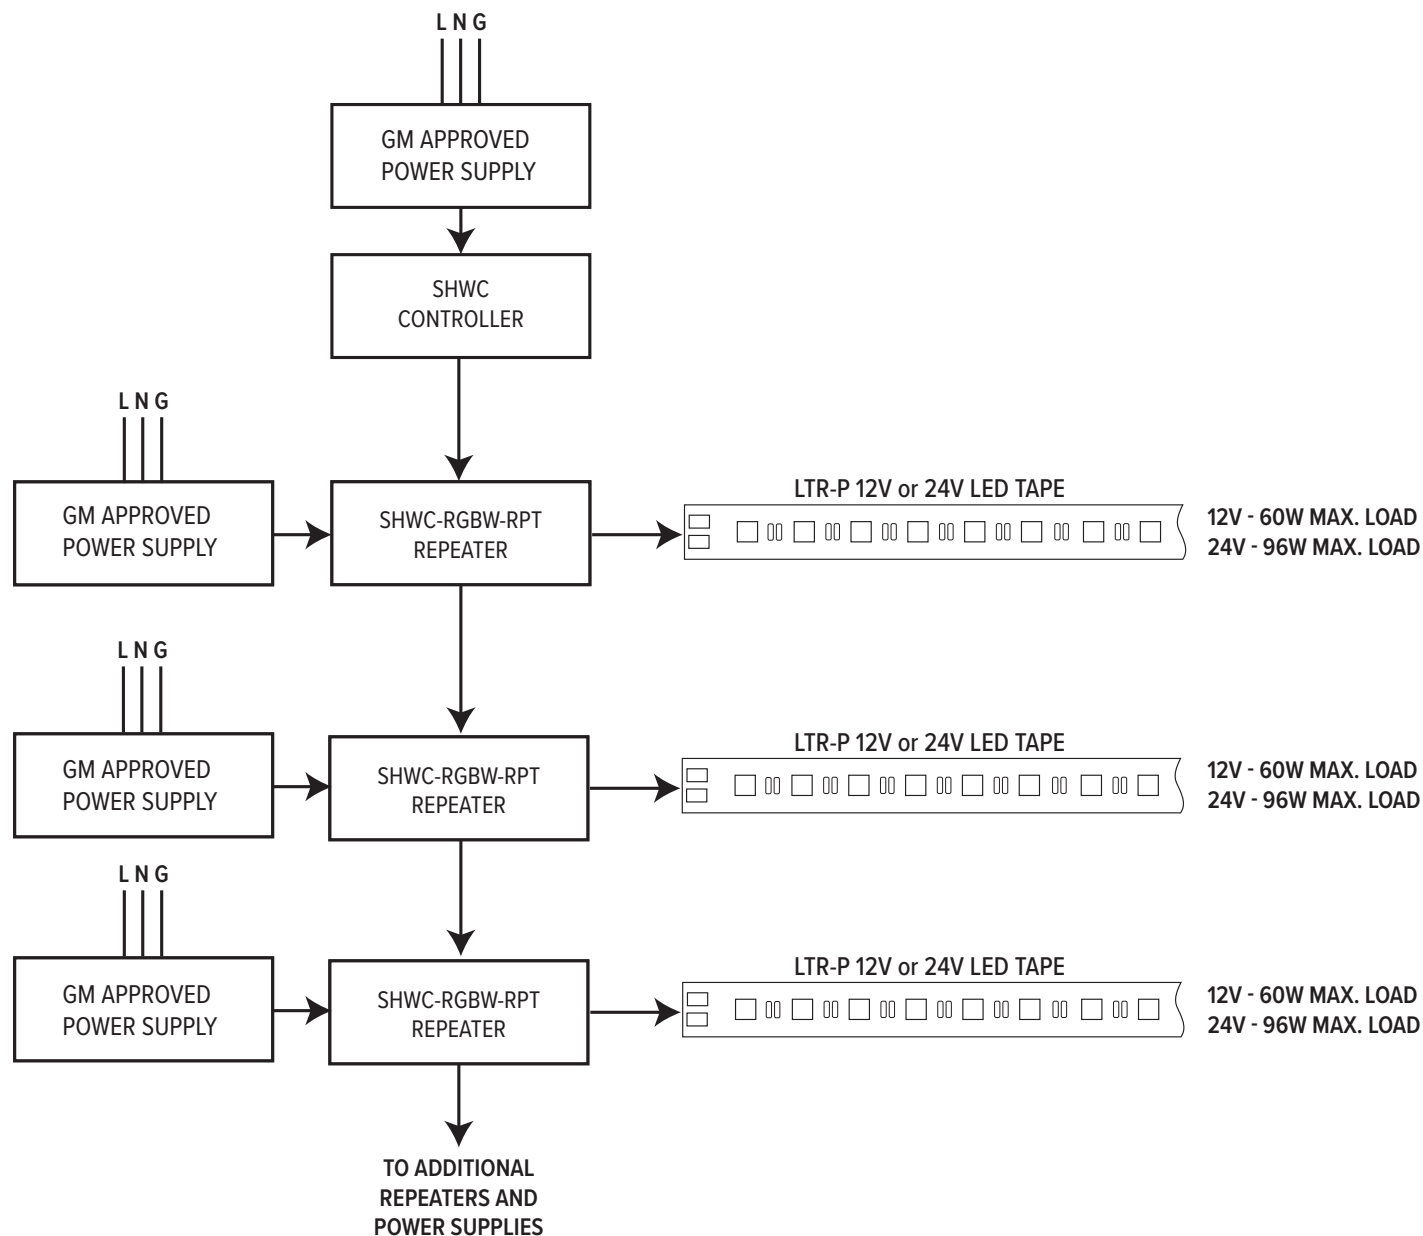
LTR-P Professional Series

1.5W, 12VDC and 24VDC LED Tape Specification Sheet

GMLighting®

SHWC LUXCONTROL WIFI CONTROLLER WITH POWER REPEATER

NOTE: Power supply **MUST NOT BE DIMMED**
at the input to properly power the controls.

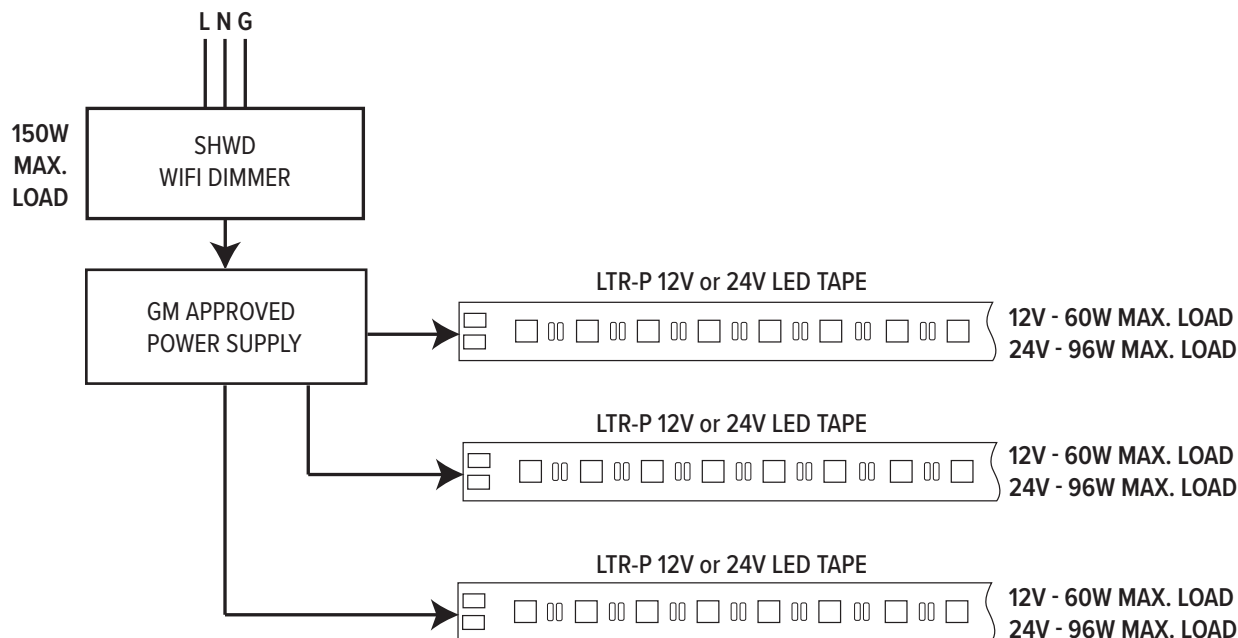


LTR-P Professional Series

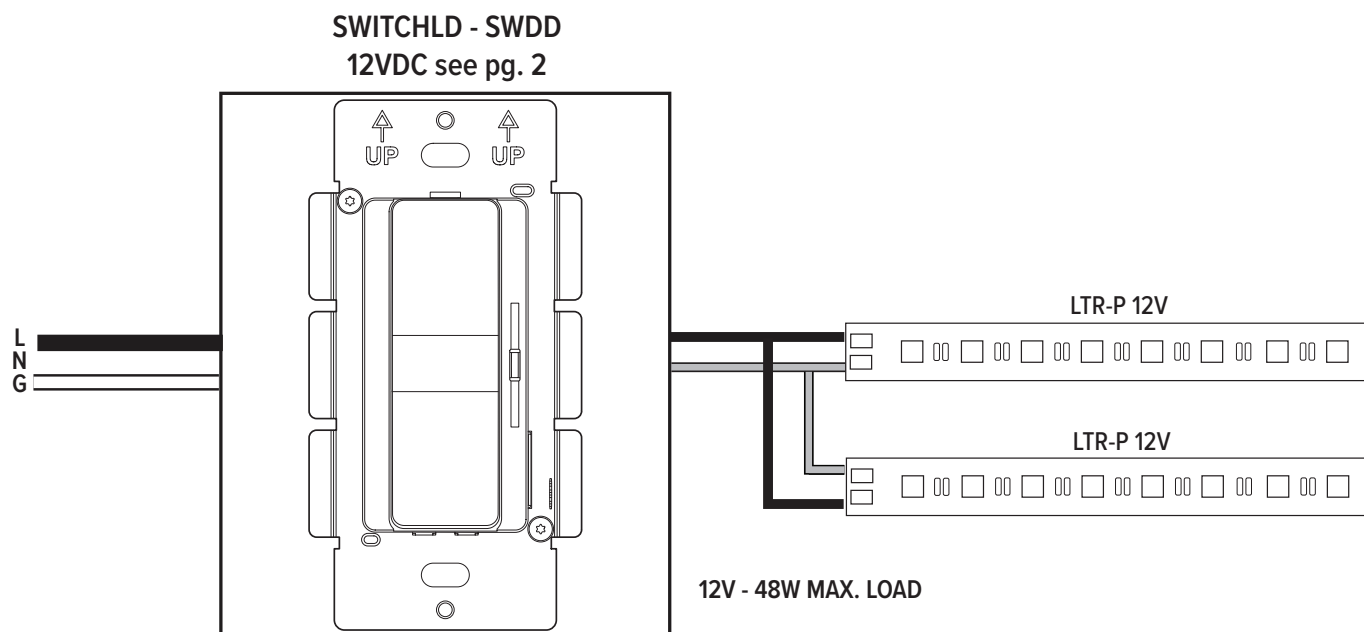
1.5W, 12VDC and 24VDC LED Tape Specification Sheet



SHWD LUXCONTROL WIFI DIMMER



SWITCHLD SWD DRIVER AND DIMMER



LTR-P Professional Series

1.5W, 12VDC and 24VDC LED Tape Specification Sheet

GMLighting®

RF CONTROLLER

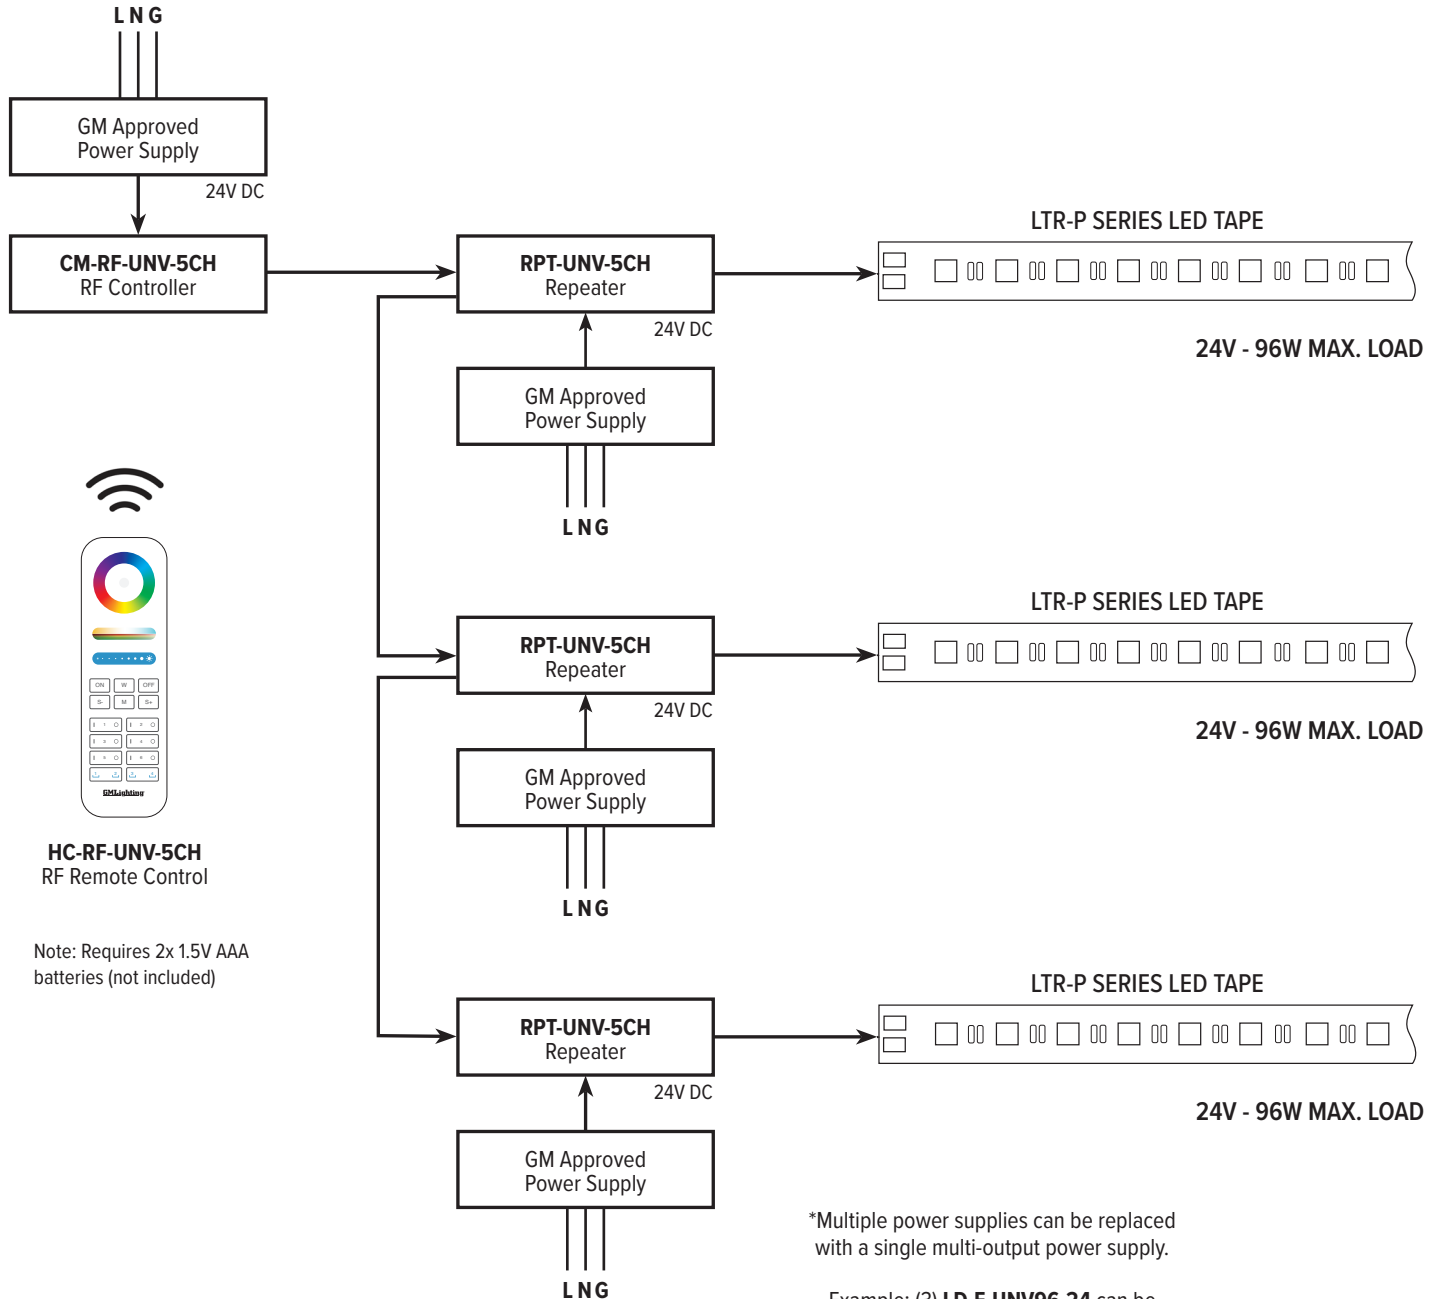
Incoming power for (L N G) options can be 120V or 277V.

Check power supply for proper input voltage and output power required.

Power Supply output voltage must match LED operating voltage. (24VDC)

Power supply used **MUST NOT BE DIMMED** at the input to properly power the controls.

See Controller instructions for pairing and wiring details.



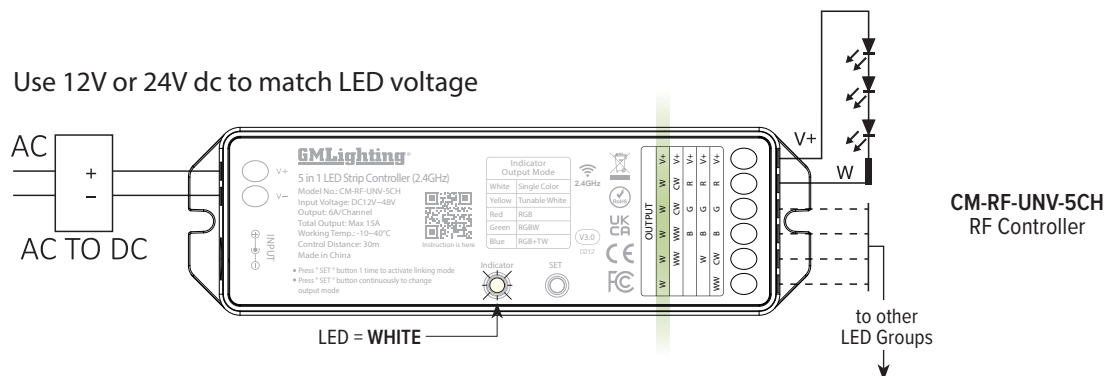
LTR-P Professional Series

1.5W, 12VDC and 24VDC LED Tape Specification Sheet

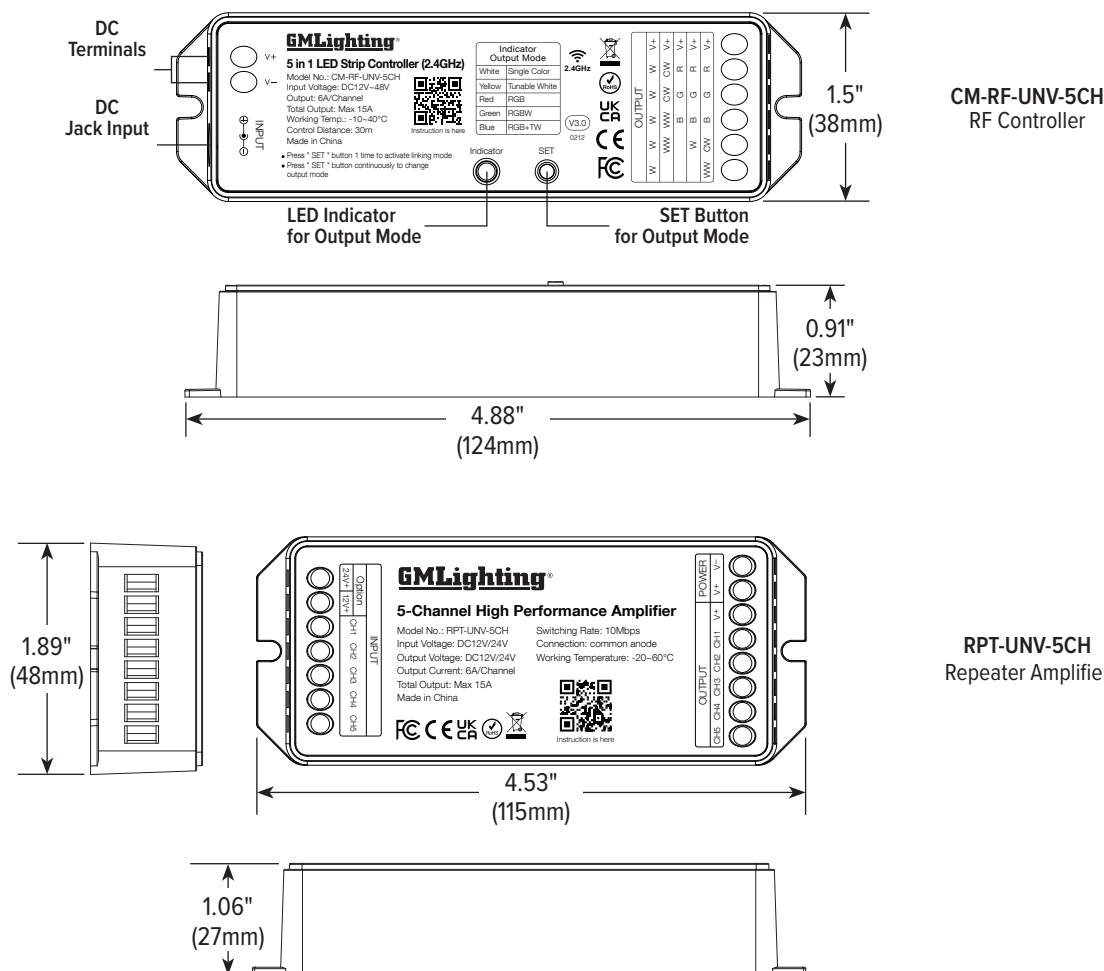
GMLighting®

RF REMOTE CONTROLLER AND REPEATER

Use 12V or 24V dc to match LED voltage



DIMENSIONS



LTR-P Professional Series

1.5W, 12VDC and 24VDC LED Tape Specification Sheet

GMLighting®

RF HAND HELD REMOTE FEATURES AND DIMENSIONS

