

LTR-S High Output Specification Series 24V 8W LED Tape

GM Lighting®



KEEP YOUR INTERIOR SPACES BRIGHT AND BEAUTIFUL WITH HIGH LUMEN SPECIFICATION SERIES LED TAPE

GM Lighting's new collection of high lumen LTR-S Series LED tape is designed for integration into ceilings and other spaces where high lumen illumination is needed. Select from a variety of color temperatures and lumen outputs to brighten your space.

Our Specification Series provides the ultimate architectural-grade option. Incorporating features that defines the LTR-S Series as truly state of the art linear LED tape for applications that not only require, but demand the best optics in the industry.

- 24VDC
- 8W per ft.
- Multiple color temperatures (27K/30K/35K/40K)
- Field cuttable every 2"
- Custom cuts - consult factory
- 90+ CRI
- Over 1000lm per ft.
- 120° viewing angle
- Dimmable
- 12' max. run
- Compatible with LUXcontrol WiFi system
- ETL certification
- 5-year warranty



For proper thermal management, this tape must be installed in a aluminum mounting channel. See next page for compatible channels.



GM Lighting®

©2022 GM LIGHTING, LLC • www.gmlighting.net • Specifications subject to change without notice
18700 Ridgeland Ave., Tinley Park, IL 60477 • Toll-Free: (866) 671-0811 FAX: (708) 478-2640 • tech@gmlighting.net

LTR-S High Output

Specification Series

24V 8W LED Tape

GM Lighting®

ORDERING INFORMATION

Catalog No.	Wattage	Length	Lumens/Ft.	CRI	Color Temp.	Max. Run
LTR-S-HO-24V-8W-27K-FT/100	8W	100ft. Reels or Custom Cuts - Consult Factory	1115	90+	2700K	12'
LTR-S-HO-24V-8W-30K-FT/100			1143	90+	3000K	12'
LTR-S-HO-24V-8W-35K-FT/100			1148	90+	3500K	12'
LTR-S-HO-24V-8W-40K-FT/100			1201	90+	4000K	12'

48" lead affixed to tape.

ACCESSORIES


Model	Description
ESTC-1	Sure-Tite tape to tape connector
ESTC-90	Sure-Tite 90° connector
ESTLK-60	Sure-Tite 60" adjustable tape to tape connector
ESTW-60	Sure-Tite 60" adjustable tape to power connector
ESTW-CO	Sure-Tite tape to power supply connector (no wire)

CONTROLLERS

Model	Description
SHWC	LUXcontrol Smart 2.4 GHz WiFi Controller, Standard 12V/24V Low Voltage, 1-Channel / 2-Wire

Note: Use LineDrive power supply with this product.

DIMENSION

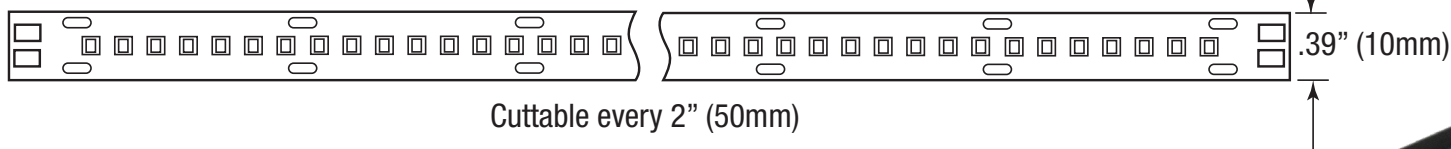

APPLICATIONS

- Offices
- Hallways
- Retail
- Hotels
- Restaurants
- Living Room
- Bedroom
- Kitchen

COMPATIBLE CHANNELS

- LED-CHL-45
- LED-CHL-45-1200
- LED-CHL-W
- LED-CHL-XD
- LED-CHL-XD-F
- LED-CHL-XD-MD
- LED-CHL-XD-MD-F
- LED-CHL-MI-ST8
- LED-CHL-MI-C8

LED-CHL-XD-MD/-F
Also available
in Black and White

GM Lighting®