

24VDC Slim Puck

Surface/Recess Mount LED

GM Lighting®

PRODUCT OVERVIEW

A 3" (75mm) diameter circular surface (with mounting ring) or recessed (without mounting ring) puck. Constructed of a high quality aluminum body with white polycarbonate diffuser lens for low glare. Available in White, Black, Bronze and Brushed Nickel trim.

FEATURES

- 24VDC operation
- 2.2W
- 2700K / 3000K
- Multiple finishes
- Dimmable with ELV drivers
- Surface or recess mount
- Magnetic cover plates
- 5 year warranty when used with GM power supplies
- Ambient Operating Temperature: -4 F to 113 F

NOTE: Use electronic power supplies only—PSD-24 or LD-XD-24 or LTP-24 (non-dimmable). Magnetic power supplies are not operable with this fixture.

SPECIFICATIONS

ELECTRICAL

- 24V
- 2.2W
- Max. 4 pucks on PSD15-24
- Max. 8 pucks on PSD24-24

CERTIFICATIONS

- ETL listed

OPTICS

- 80+ CRI
- 2700K / 165lm
- 3000K / 170lm

WARRANTY

- 5 years

Project Name	Type
Catalog #	Date



ORDERING INFORMATION





Catalog No.	Dimensions	Wattage	Lumens	CRI	Color Temp	Finish
PL24V-27-W	3" dia. x 1/4" depth	2.2W	165	80+	2700K	White
PL24V-27-B	3" dia. x 1/4" depth	2.2W	165	80+	2700K	Black
PL24V-27-BZ	3" dia. x 1/4" depth	2.2W	165	80+	2700K	Bronze
PL24V-27-BNK	3" dia. x 1/4" depth	2.2W	165	80+	2700K	Brushed Nickel
PL24V-30-W	3" dia. x 1/4" depth	2.2W	170	80+	3000K	White
PL24V-30-B	3" dia. x 1/4" depth	2.2W	170	80+	3000K	Black
PL24V-30-BZ	3" dia. x 1/4" depth	2.2W	170	80+	3000K	Bronze
PL24V-30-BNK	3" dia. x 1/4" depth	2.2W	170	80+	3000K	Brushed Nickel

24VDC Slim Puck


Surface/Recess Mount LED

GMLighting®

DIMENSIONS

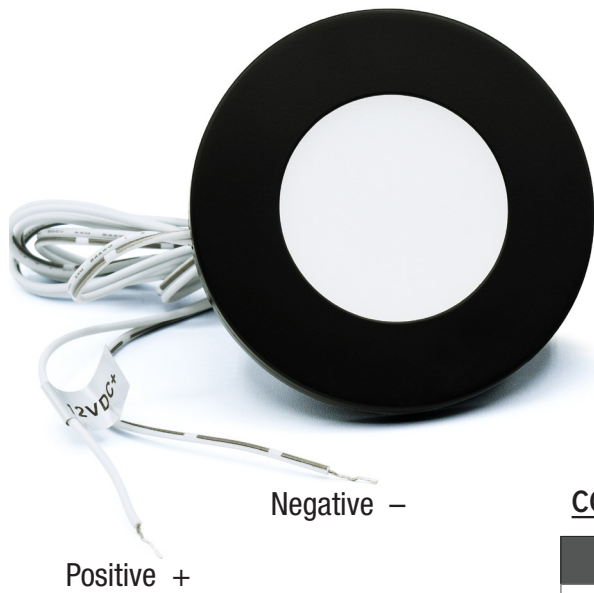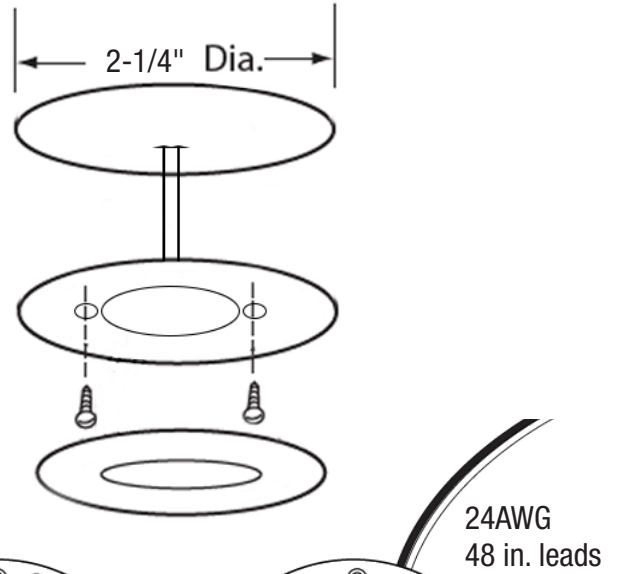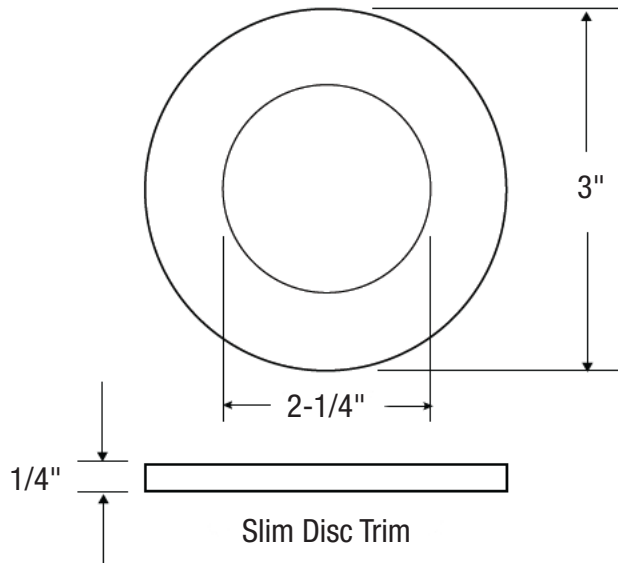

Surface Mount Ring

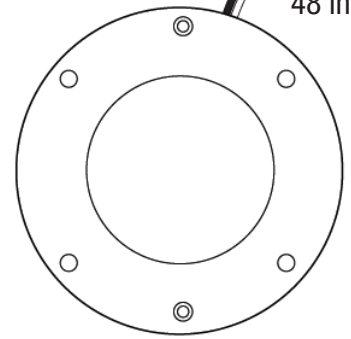

Lamp Holder Ring

COMPATIBLE DIMMERS

Models
DIVA-CL
LUTRON-MAESTRO-MCL-153
LUTRON DIVA 303P
LUTRON CASETA-PD
LEVITON DECORA
LUTRON SKYLARK-CONTOUR-CL

RECOMMENDED DRIVERS

Models
PSD15-24
PSD24-24
PSD-24
LTP-24
LD-XD-UNV-24