

BEFORE YOU START:

- Please check local electrical codes before beginning
- Turn power off before installing
- Make sure to use proper rated wire

INSTALLATION:

Install two screws (furnished) into junction box. Do not fully drive screws in. (Fig. 1)

Connect supply wires to wires in fixture wiring box using wire nuts (by others). Connect white to white, black to black, and green or bare copper wire to bare copper wire. (Fig. 2)


If there is a ground wire at junction box, secure it to ground screw.

Using a Phillips screwdriver, attach the disk light housing tightly to the junction box. (Fig. 3)

Press and twist the diffuser into housing, and twist to lock in place. (Fig. 4)

TOOLS NEEDED:

• Phillips Screwdriver

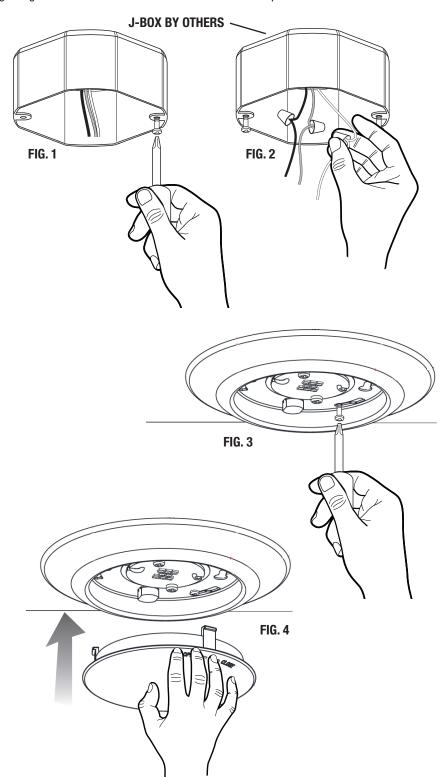



©2017 GM Lighting Specifications are subject to change

9830 W. 190th Street, Unit F Mokena, IL 60448

Toll-Free: (866) 671-0811 FAX: (708) 478-2640

www.gmlighting.net sales@gmlighting.net