

# 120V XENON LUMENTASK™



## Specification Sheet

### PRODUCT OVERVIEW

120V Xenon offers rich color and clarity with high intensity, low maintenance Xenon lighting in 4 lengths and 3 finishes. LumenTask undercabinet lighting incorporates a sleek, clean and unobtrusive housing that was designed by contractors for contractors. Xenon has a brilliant history in the medical and automotive field where efficiency is key.

### FEATURES

- 35W Xenon lamps included
- 2900K
- Removable glass lens slides in and out for easy maintenance
- Dimmable
- 90+ CRI
- End caps feature standard / Wiremold™ combo Units join securely together with connectors
- Available in 8", 16", 24" and 32" lengths
- 5 year warranty

### SPECIFICATIONS

#### HOUSING CONSTRUCTION

- 1 piece low profile (1-3/8" height)
- Die-formed 18 ga. cold rolled steel housing
- Die cast end caps
- Mounting holes with pre-affixed screws
- Multiple vents for cool operation
- Powder coat paint / or stainless steel finish
- Ambient Operating Temp: -4F to 113F

#### ELECTRICAL

- 120V G9 Xenon • Hi-low-off switch
- Wire mold knock-outs on end caps
- Dimmable with standard dimmer

#### OPTICS

- 2900K
- Tempered frosted prismatic diffuser

#### CERTIFICATION

- UL

#### WARRANTY

- 5 year warranty

Project Name	Type
Catalog #	Date



### ORDERING INFORMATION

Example: X8-120-WH

Catalog No.	Length	Wattage	Lumens	Lamp	Color Temp	Finish
X8-120-WH	8" / 203mm	35W / bar	310	120V G9 Xenon	2900K	White
X8-120-BZ	8" / 203mm	35W / bar	310	120V G9 Xenon	2900K	Bronze
X8-120-SS	8" / 203mm	35W / bar	310	120V G9 Xenon	2900K	Stainless Steel
X16-120-WH	16" / 406mm	2 X 35W / bar	620	120V G9 Xenon	2900K	White
X16-120-BZ	16" / 406mm	2 X 35W / bar	620	120V G9 Xenon	2900K	Bronze
X16-120-SS	16" / 406mm	2 X 35W / bar	620	120V G9 Xenon	2900K	Stainless Steel
X24-120-WH	24" / 610mm	3 X 35W / bar	930	120V G9 Xenon	2900K	White
X24-120-BZ	24" / 610mm	3 X 35W / bar	930	120V G9 Xenon	2900K	Bronze
X24-120-SS	24" / 610mm	3 X 35W / bar	930	120V G9 Xenon	2900K	Stainless Steel
X32-120-WH	32" / 1016mm	4 X 35W / bar	1240	120V G9 Xenon	2900K	White
X32-120-BZ	32" / 1016mm	4 X 35W / bar	1240	120V G9 Xenon	2900K	Bronze
X32-120-SS	32" / 1016mm	4 X 35W / bar	1240	120V G9 Xenon	2900K	Stainless Steel

# 120V XENON LUMENTASK™


## Specification Sheet



### ACCESSORY ORDERING INFORMATION

Catalog No.	Description
EZ-1	EZ Connector (connects 2 fixtures)
EZ-3	3" interconnect modular cable
EZ-6	6" interconnect modular cable
EZ-12	12" interconnect modular cable
EZ-18	18" interconnect modular cable
SLJR-HSW	Junction box - 4 knock-outs 4"L x 2"W x 1-5/8"H
CP-6	6' modular cord and plug for wall outlet
GL8	8" replacement lens for 8" fixtures
GL16	16" replacement lens for 16" fixtures
GL24	24" replacement lens for 24" fixtures
GL32	32" replacement lens for 32" fixtures
G9-120VCL	120V 35W Xenon replacement lamp

### DIMENSION

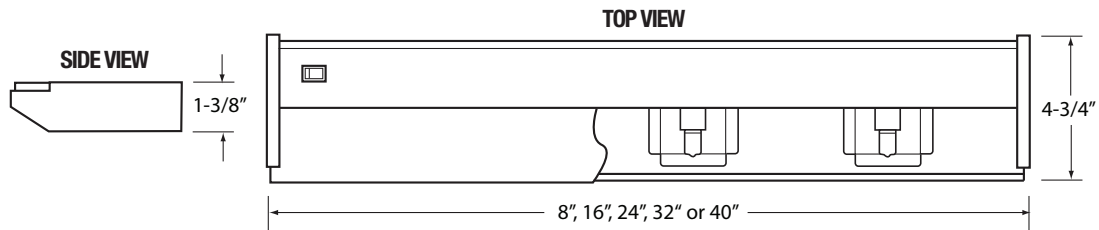

Note: Ambient operating temp range -4F to 104 F. Do not install in an environment that is outside of the product's listed ambient temp.