



PROJECT	TYPE
CATALOG NUMBER	

**KEY FEATURES**

- Flexible LED ribbon with diodes placed to throw light out at an angle
- Flexible LED ribbon that is cuttable in the field
- 3M double stick mounting tape pre-affixed to back of ribbon
- Flexible ribbon to ribbon and ribbon to power supply connectors available (see below)
- Dimmable

**ELECTRICAL**

- 12VDC
- Rated at 1.46W per foot
- 39": 0.4A / reel, 16'-4": 2A / reel
- 19 LED's per foot, .08W each
- 50,000 hr. LED life

**OPTICS**

- 3000K, 3500K, 4200K
- Up to 128 lumens per foot

**LABEL**



- ETL

**PRODUCT DESCRIPTION**

LEDTask SIDE VIEW RIBBON is a flexible LED linear ribbon that conforms to straight, curved and irregular architectural coves, bannisters, recesses, and other constructs where even, energy saving LED illumination is specified. Available in a 16'-4" (5M) reel, this LED ribbon features diodes placed strategically in order to throw light out at an angle. Available in 3000K, 3500K and 4200K

**Custom lengths available - consult factory**

**Aluminum architectural mounting channels available - consult website: [www.gmlighting.net](http://www.gmlighting.net)**

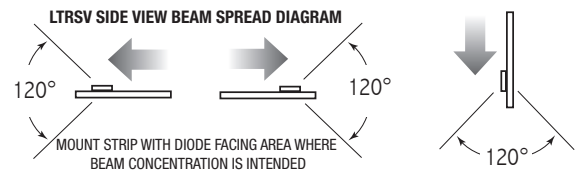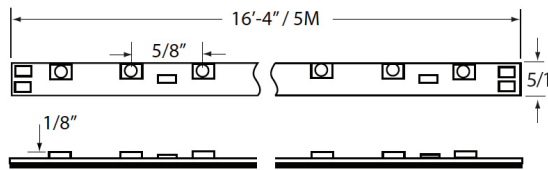

**FIXTURE ORDERING INFORMATION**

Catalog No.	Length	Wattage	Total Amps	Lumens	Color Temp.*
LTRSV-300-S0-30	16'-4" / 5M	.08W (1.46W/ft.)	0.4A	110/ft.	3000K
LTRSV-300-S0-35	16'-4" / 5M	.08W (1.46W/ft.)	0.4A	120/ft.	3500K
LTRSV-300-S0-42	16'-4" / 5M	.08W (1.46W/ft.)	0.4A	128/ft.	4200K

NOTE: Each 39" reel includes: (1) 24" lead affixed at start of ribbon, (1) LTW-24 and (1) LTC-1 connector  
Each 16'-4" reel includes: (1) 24" lead affixed at start of ribbon, (3) LTW-24 connectors and (3) LTC-1 connectors.

\* Kelvin temperature (color) ±200K

**POWER SUPPLIES: GM offers a complete line of power supplies. Please see our website at [www.gmlighting.net](http://www.gmlighting.net)**

**PHOTOMETRICS: Photometric reports and .ies files are available. Please consult product page on website at [www.gmlighting.net](http://www.gmlighting.net) at [www.gmlighting.net](http://www.gmlighting.net)**

**CONNECTOR ORDERING INFORMATION**

Cat. No.	Description
STC-1	SureTite tape to tape direct connector
STC-90	SureTite 90° tape to tape direct connector
STLK-60	SureTite 60° flexible tape to tape connector
STW-60	SureTite 60° flexible tape to power supply connector
STW-C0	SureTite 60° tape to power supply connector only (no wire)
GMSB-W	Splice box - white - 2"L x 1"W x 5/8"D
GMSB-B	Splice box - box - 2"L x 1"W x 5/8"D