### **Electronic Dimmable**

### 12/24VDC 60W MINI CASE **LineDRIVE Power Supply**

#### **PRODUCT OVERVIEW**

LineDRIVE 12V and 24V MINI Series Electronic LED Power Supplies are Class 2 rated and designed to work with standard ELV dimmer switches. Encased in a low profile light weight aluminum enclosure. Easy to install and hardwire into many lighting applications.



Project Name	Туре
Catalog #	Date















#### **FEATURES**

- Output constant voltage
- 10% to 100% dimming range (varies by dimmer and load)
- Dimmable with ELV dimmers
- Class 2 low voltage output
- IP20 design for dry and damp location
- Short circuit protection
- FCC compliant
- 5 year warranty



#### **SPECIFICATIONS**

#### **ELECTRICAL**

- Input: 120VAC, 50/60Hz
- Output: 60W max, 12VDC or 24VDC versions
- Load: min. 10W to max. for optimal performance

#### HOUSING

- Black aluminum with flying leads
- Cooling by free-air convection

#### **ENVIRONMENT**

• Store in a dry location

#### **OPERATING TEMP**

- -22 to 104°F (-30 to +40°C) ambient
- Max case temperature 90°C
- 60°C case max for 95,000 hr life

#### CERTIFICATION

- FCC
- UL recognized for US and Canada
- Class 2

#### **PROTECTION**

• Over voltage and short circuit protection

Example: LD-EDM-60-24

• Hiccup mode, recover automatically after fault condition is removed

#### WARRANTY

• 5-year warranty

#### ORDERING INFORMATION

	] -		_		_	
Model	-	Series		Watts		Voltage
LD		EDM		60		12
						24




## **Electronic Dimmable**

# 12/24VDC 60W MINI CASE LineDRIVE Power Supply




Model	Output	Input	Power Factor	Efficiency	Weight	Size (L*W*H)
LD-EDM-60-12	60W / 12VDC / 5A	120VAC, 0.56A, 60Hz	>0.9 (50-100% load)	>90% (50-100% load)	0.37lbs (170g)	2.88"L x 1.57"W x 0.87"H (73*40*22mm)
LD-EDM-60-24	60W / 24VDC / 2.5A	120VAC, 0.56A, 60Hz	>0.9 (50-100% load)	>90% (50-100% load)	0.37lbs (170g)	2.88"L x 1.57"W x 0.87"H (73*40*22mm)

#### **DIMENSION**

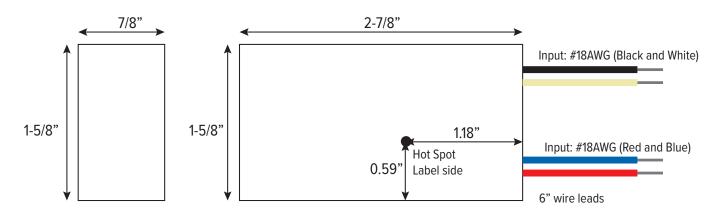

#### **WIRING DIAGRAM**

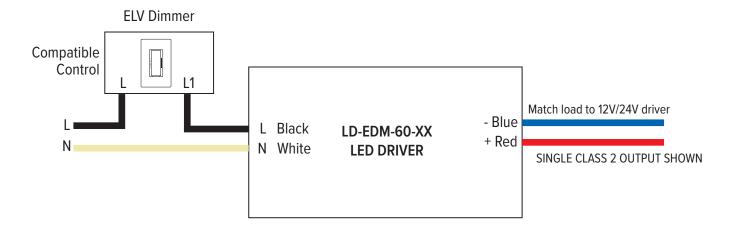

### **Electronic Dimmable**

## 12/24VDC 60W MINI CASE LineDRIVE Power Supply



#### **DIMMING OPERATION**

- Compatible with ELV and reverse phase dimmers.
- Try to use dimmers with a capacity at least 2.5 times as the output power of the driver.
- See Compatible Dimmers list below.

#### **WARNING**

- Do not reverse polarity.
- Risk of Fire. Consult a qualified electrician for installation. Install per local and NEC electrical codes.
- Risk of Electric Shock. Mount the unit at a height greater than 1 foot from the ground surface.

#### **COMPATIBLE DIMMERS**

Dimmer	LD-EDM-60-12	LD-EDM-60-24
LUTRON MACL-153M	✓	✓
LEVITON DSE06-10Z	✓	✓
LUTRON MA-PRO *1,2,3	✓	✓
LEGRAND RH703 *1,3	<b>√</b>	<b>✓</b>

#### **Dimmer Notes:**

Recommended settings for optimal dimming performance.

- \*1 Adjust low end trim to improve dimmed output performance as needed.
- \*2 Adjust high end trim to improve high output performance as needed.
- \*3 Adjust phase dimming to Auto or ELV to improve overall dimming.

Performance of the Dimmers may vary within the same series or with different LED load types. Other dimmers may be compatible. Compatibility List may change without prior notice.



Page 3