

Brick Light

120/277V Horizontal / Louver / Open SPECIFICATION SHEET

PRODUCT OVERVIEW

GM Lighting's new take on brick lighting has resulted in this extensive collection of modern brick lights. Available in horizontal scoop, open horizontal and horizontal louver formats. Perfect for step lighting, path lighting, deck lighting in stairs or walls.

FEATURES

- 3000K color temperature
- 80+ CRI
- No visible mounting hardware
- Dry and Wet location
- Four Finishes: White, Black, Bronze and Brushed Nickel
- Three Horizontal Faceplate Options: Open, Scoop and Louver
- Die-cast zinc magnesium rough-in housing
- Rough-in housing is suitable for concrete pour and masonry

SPECIFICATIONS

ELECTRICAL

- 120V-277V
- 5W / 60Hz

OPERATING TEMP

- -4 to 122°F (-20 to +50°C)

CERTIFICATION

- ETL listed for wet locations

WARRANTY

- 5-year limited warranty

ORDERING INFORMATION

Housing	Format
GBL-MO	Rough-in housing for open and louver faceplate
GBL-MR	Rough-in housing for horizontal scoop faceplate

FACEPLATES

Note: Fixture = Faceplate and Housing

Face Plate	Format	Compatible Housing
GBL-FPO-WH	White Faceplate, Open	GBL-MO
GBL-FPO-B	Black Faceplate, Open	
GBL-FPO-BZ	Bronze Faceplate, Open	
GBL-FPO-BN	Brushed Nickel Faceplate, Open	
GBL-FPLV-WH	White Faceplate, Louver	GBL-MO
GBL-FPLV-B	Black Faceplate, Louver	
GBL-FPLV-BZ	Bronze Faceplate, Louver	
GBL-FPLV-BN*	Brushed Nickel Faceplate, Louver	
GBL-FPH-WH	White Faceplate, Scoop	GBL-MR
GBL-FPH-B	Black Faceplate, Scoop	
GBL-FPH-BZ	Bronze Faceplate, Scoop	
GBL-FPH-BN	Brushed Nickel Faceplate, Scoop	

GM Lighting®

Project Name

Type

Catalog #

Date

120-277
VOLT

ETL
C
US
Intertek

5Yr
WARRANTY

JWET
LOCATION



GBL-FPLV-BZ




GBL-FPH-WH



GBL-FPO-BN

ACCESSORIES

Model	Format
GBL-SMB	(2) Brick Light Stud Mounting Brackets w/Screws

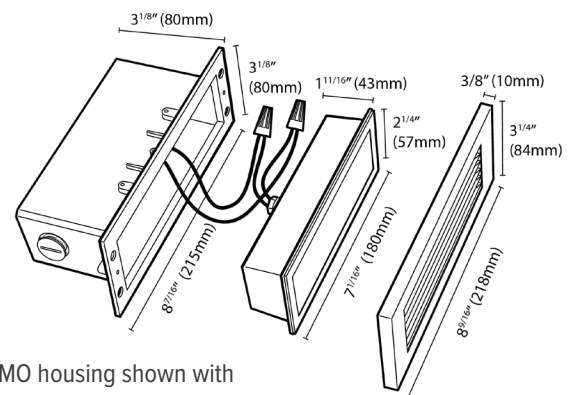

GBL-MO housing shown with
GBL-FPLV face plate


Brick Light

120/277V Horizontal / Louver / Open SPECIFICATION SHEET


GMLighting®

DIMENSIONS

HORIZONTAL

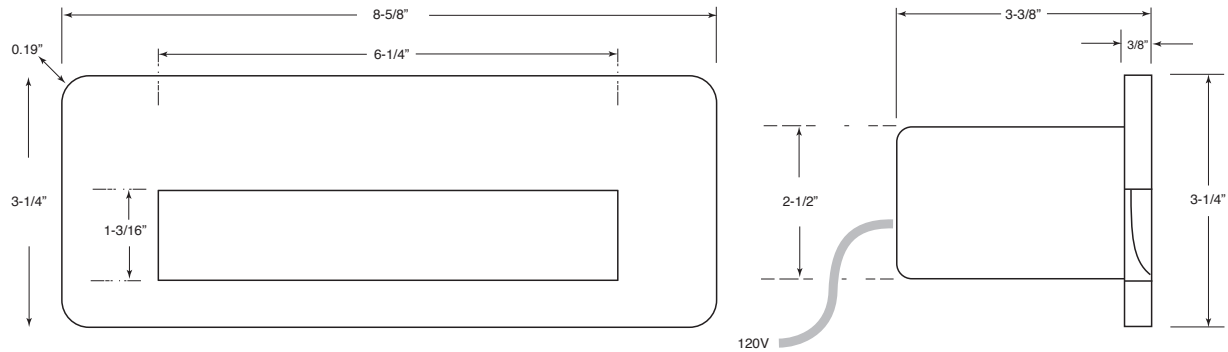

LOUVER

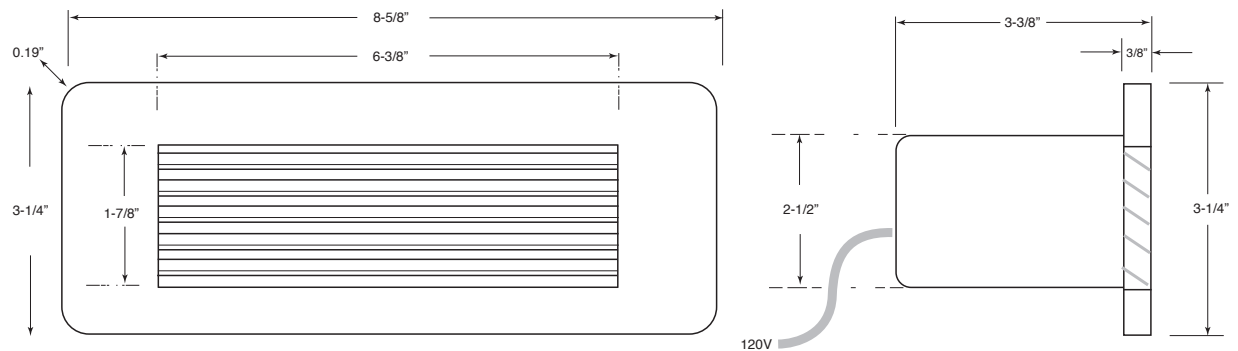

OPEN

