

Brick Light

120/277V Horizontal / Louver / Open SPECIFICATION SHEET

GM Lighting®

PRODUCT OVERVIEW

GM Lighting's new take on brick lighting has resulted in this extensive collection of modern brick lights. Available in horizontal scoop, open horizontal and horizontal louver formats. Perfect for step lighting, path lighting, deck lighting in stairs or railings.

FEATURES

- 3000K color temperature
- 80+ CRI
- No visible mounting hardware
- Dry and Wet location
- Four Finishes: White, Black, Bronze and Brushed Nickel
- Three Horizontal Faceplate Options: Open, Scoop and Louver
- Die-cast zinc magnesium rough-in housing

SPECIFICATIONS

ELECTRICAL

- 120V-277V
- 5W / 60Hz

OPERATING TEMP

- -4 to 122°F (-20 to +50°C)

CERTIFICATION

- ETL listed for wet locations

WARRANTY

- 5-year limited warranty

ORDERING INFORMATION

Model	Format
GBL-MO	Rough-in housing for open and louver faceplate
GBL-MR	Rough-in housing for horizontal scoop faceplate

FACEPLATES

Model	Format
GBL-FPO-WH	White Faceplate, Open
GBL-FPO-B	Black Faceplate, Open
GBL-FPO-BZ	Bronze Faceplate, Open
GBL-FPO-BN	Brushed Nickel Faceplate, Open
GBL-FPLV-WH	White Faceplate, Louver
GBL-FPLV-B	Black Faceplate, Louver
GBL-FPLV-BZ	Bronze Faceplate, Louver
GBL-FPLV-BN*	Brushed Nickel Faceplate, Louver
GBL-FPH-WH	White Faceplate, Scoop
GBL-FPH-B	Black Faceplate, Scoop
GBL-FPH-BZ	Bronze Faceplate, Scoop
GBL-FPH-BN	Brushed Nickel Faceplate, Scoop

ACCESSORIES

Model	Format
GBL-SMB	(2) Brick Light Stud Mounting Brackets w/Screws

Project Name	Type
--------------	------

Catalog #	Date
-----------	------



GBL-FPLV-BZ



GBL-FPH-WH



GBL-FPO-BN

*Note: COMING SOON - Brushed Nickel in Louver format


Brick Light

120/277V Horizontal / Louver / Open SPECIFICATION SHEET




DIMENSIONS

HORIZONTAL

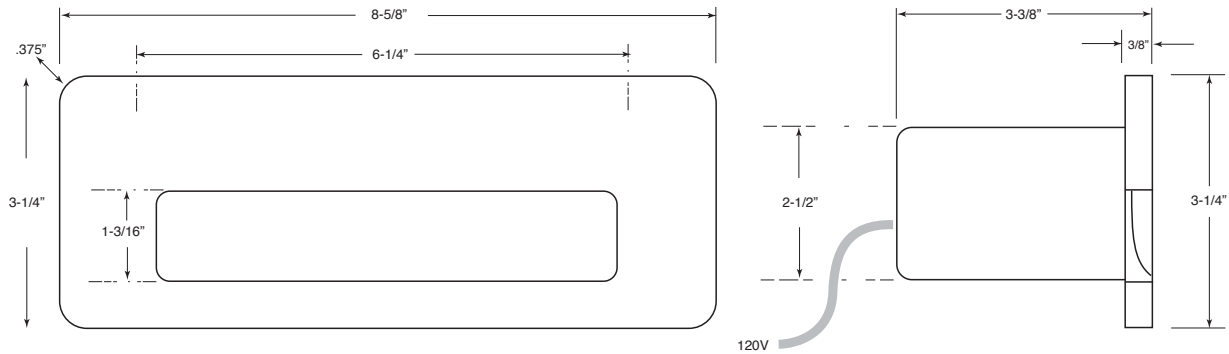

LOUVER

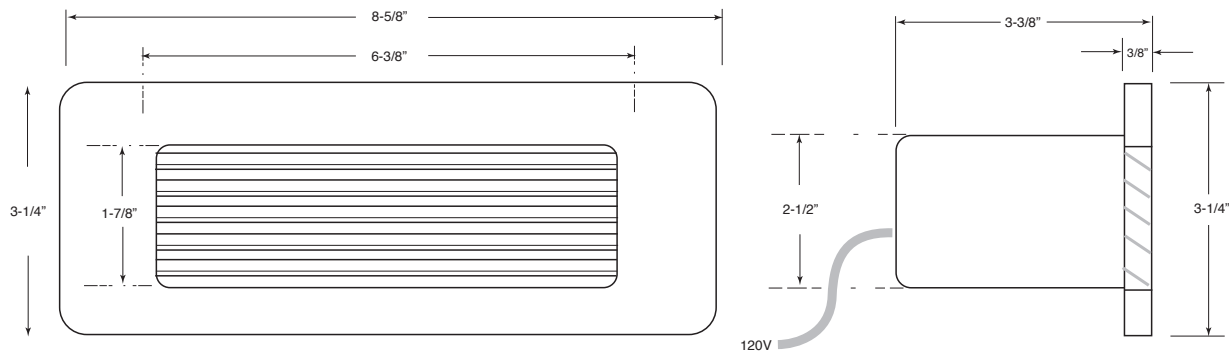

OPEN

