

Brick Light

120V / 277V

Louver / Open / Scoop Specification Sheet

GM Lighting®

Project Name	Type
Catalog #	Date

PRODUCT OVERVIEW

GM Lighting's new take on brick lighting has resulted in this extensive collection of modern brick lights. Available in horizontal louver, open and scoop formats. Perfect for step lighting, path lighting, deck lighting in stairs or walls.



FEATURES

- 3000K color temperature
- 80+ CRI
- No visible mounting hardware
- Dry and Wet location
- Four Finishes: Black, Brushed Nickel, Bronze and White
- Three Horizontal Faceplate Options: Louver, Open and Scoop
- Die-cast zinc magnesium rough-in housing
- Rough-in housing is suitable for concrete pour and masonry

APPLICATIONS

ELECTRICAL

- 120V - 277V
- 5W / 60Hz

OPERATING TEMP

- -4° to 122°F (-20° to 50° C)

CERTIFICATION

- ETL listed
- listed for wet locations

WARRANTY

- 5 year limited warranty

ORDERING INFORMATION

Housing

Product No.	Description
GBL-MO	Rough-in housing for Louver / Open faceplate
GBL-MR	Rough-in housing for Scoop faceplate

Faceplates

Product No.	Description	Compatible Housing
GBL-FPLV-B	Louver, Black	GBL-MO
GBL-FPLV-BN	Louver, Brushed Nickel	
GBL-FPLV-BZ	Louver, Bronze	
GBL-FPLV-WH	Louver, White	
GBL-FPO-B	Open, Black	GBL-MO
GBL-FPO-BN	Open, Brushed Nickel	
GBL-FPO-BZ	Open, Bronze	
GBL-FPO-WH	Open, White	
GBL-FPH-B	Scoop, Black	GBL-MR
GBL-FPH-BN	Scoop, Brushed Nickel	
GBL-FPH-BZ	Scoop, Bronze	
GBL-FPH-WH	Scoop, White	

Accessories

Product No.	Description
GBL-SMB	(2) Stud Mounting Brackets with Screws




GBL-FPLV-B



GBL-FPLV-BN



GBL-FPO-BZ

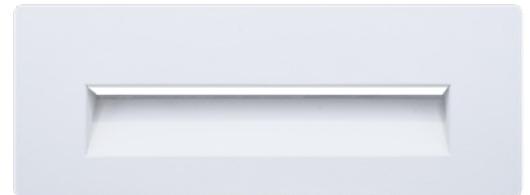

GBL-FPH-WH



GBL-MO



GBL-MR

Brick Light



120V / 277V

Louver / Open / Scoop
Specification Sheet





DIMENSIONS



LOUVER

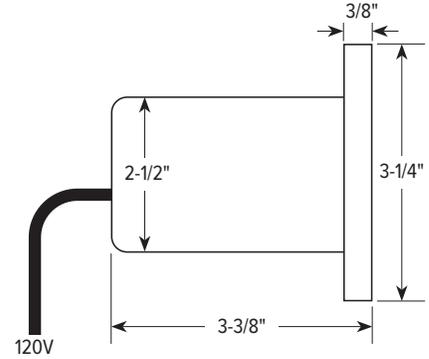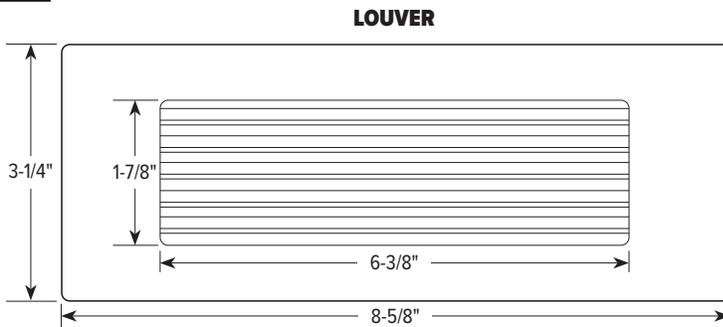

OPEN

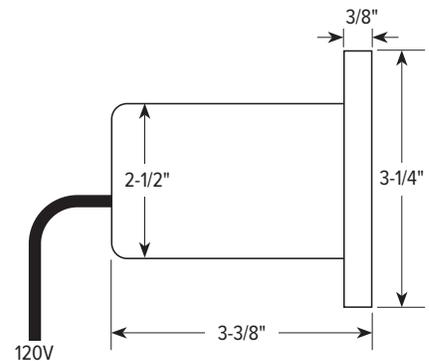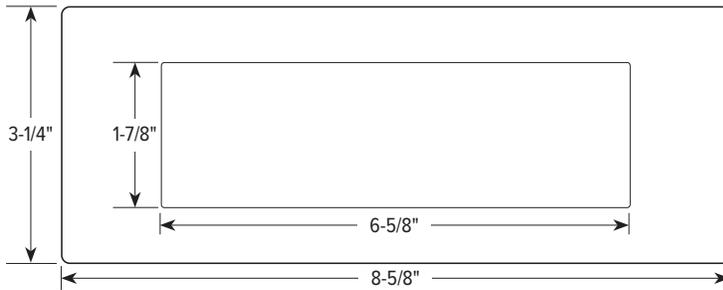

SCOOP

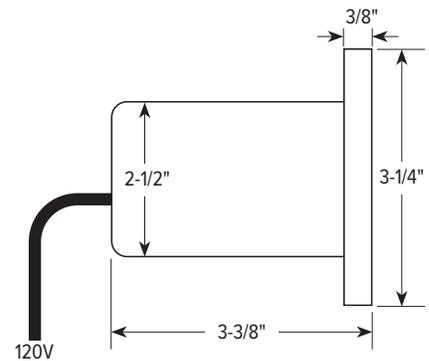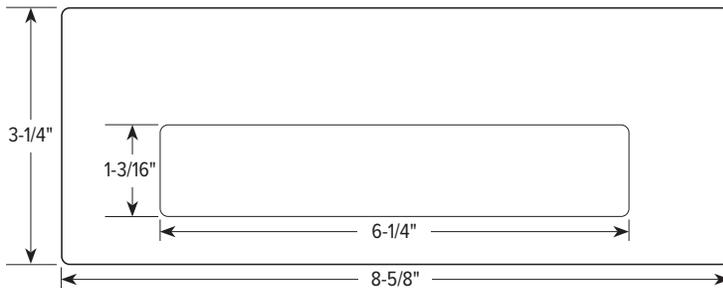

GASKET: CUT-OUT DIMENSIONS

