
LEDTASK LTR LED TAPE WIRING DIAGRAMS
for GM 24VDC Tunable White LED Tape / DMX Controls

24VDC Tunable LED Tape: Two Channel | Three Wire	DMX Controls
LTR-S-TUN-24V-1.5W	WC2-TW-DMX-BT DMX-LT-995
LTR-S-TUN-24V-3.0W	
LTR-S-TUN-24V-4.5W	

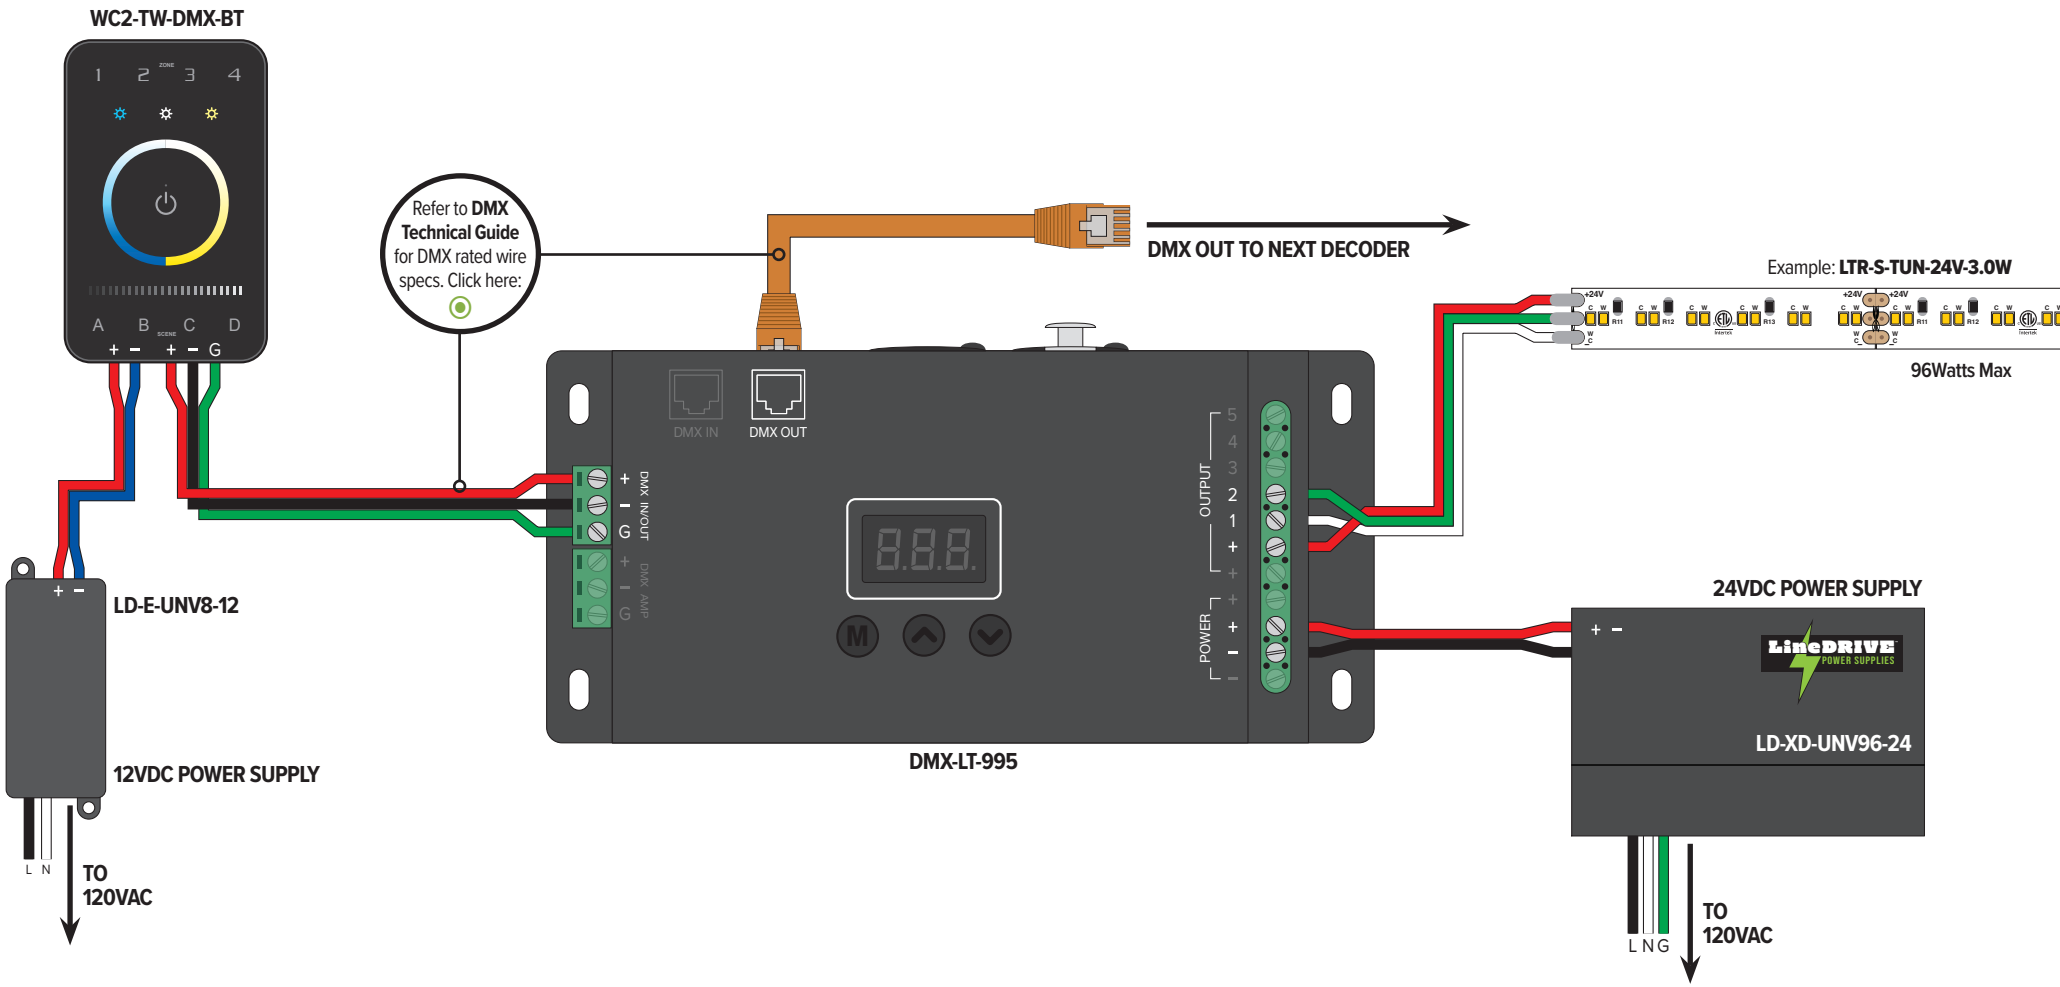


Low Voltage System Notes

- LED load and driver MUST operate at the same voltage for each system
- Other drivers can be used if each output is ≤ max wattage rating of drivers in diagrams
- Check control specs to identify other approved drivers
- Driver wattage output must be ≥ load wattage on each controller or repeater
- 96 watt max per device for 24 volt systems (Class 2 safety)
- 60 watt max per device for 12 volt systems (Class 2 safety)
- Do not exceed max tape length runs or max wattage limits for specific products

©2026 GM LIGHTING, LLC • www.gmlighting.net • Specifications subject to change without notice
18700 Ridgeland Ave., Tinley Park, IL 60477 • Toll-Free: 866.671.0811 FAX: 708.478.2640 • tech@gmlighting.net

LEDTASK LTR LED TAPE WIRING DIAGRAMS
for GM 12VDC Static Color LED Tape / DMX Controls

12VDC Static Color LED Tape: One Channel | Two Wire	DMX Controls
LTR-P-12V-1.5W-XXX	WC1-SC-DMX-BT DMX-LT-995
LTR-P-12V-3.0W-XXX	
LTR-S-12V-2.2W-XXX	
LTR-E-12V-1.5W-XXX	

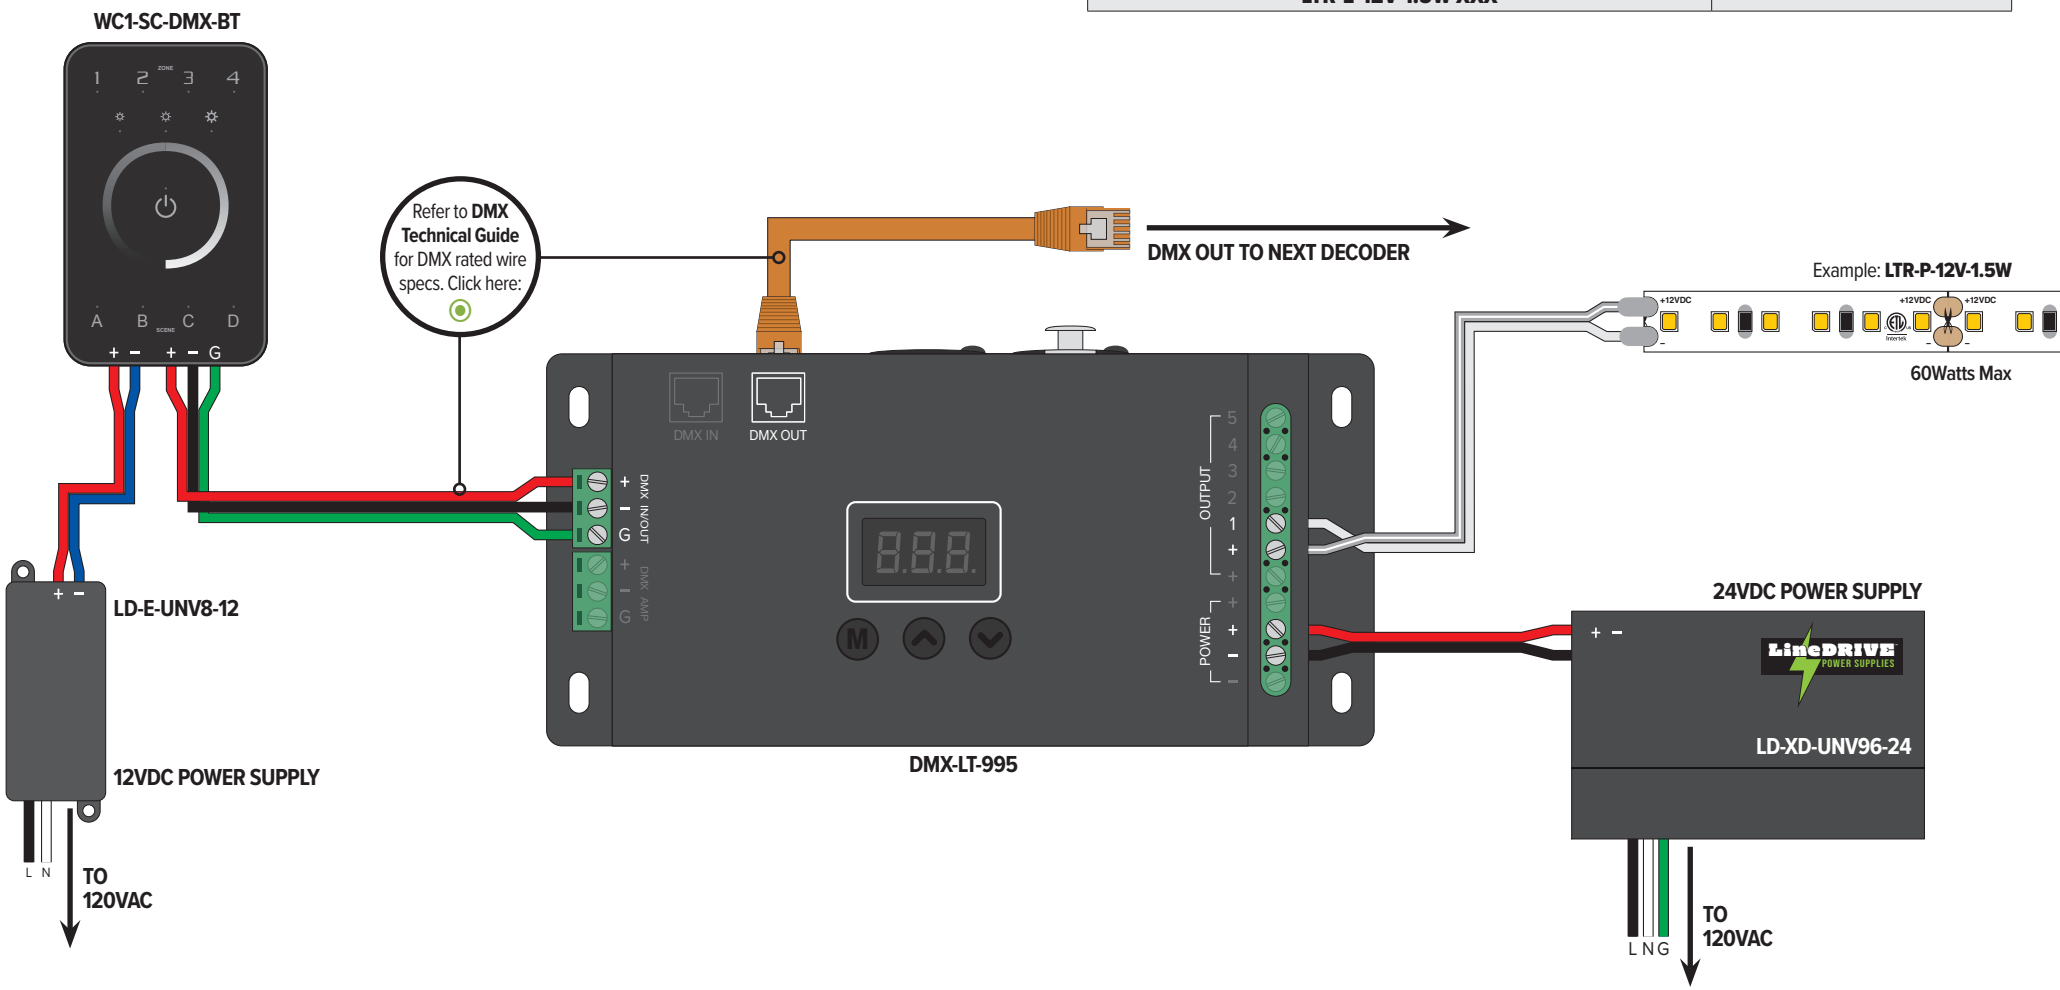


Low Voltage System Notes

- LED load and driver MUST operate at the same voltage for each system
- Other drivers can be used if each output is ≤ max wattage rating of drivers in diagrams
- Check control specs to identify other approved drivers
- Driver wattage output must be ≥ load wattage on each controller or repeater
- 96 watt max per device for 24 volt systems (Class 2 safety)
- 60 watt max per device for 12 volt systems (Class 2 safety)
- Do not exceed max tape length runs or max wattage limits for specific products

©2026 GM LIGHTING, LLC • www.gmlighting.net • Specifications subject to change without notice
18700 Ridgeland Ave., Tinley Park, IL 60477 • Toll-Free: 866.671.0811 FAX: 708.478.2640 • tech@gmlighting.net

LEDTASK LTR LED TAPE WIRING DIAGRAMS
for GM 24VDC Static Color LED Tape / DTW LED Tape / DMX Controls

24VDC Static Color / DTW LED Tape: One Channel | Two Wire				DMX Controls
LTR-S-24V-2.5W-XXX	**LTR-S-COB-24V-1.5W-XXX**	**LTR-P-24V-1.5W-XXX**	**LTR-P-WP-24V-1.5W-XXX**	**WC1-SC-DMX-BT** **DMX-LT-995**
LTR-S-24V-5.8W-XXX	**LTR-S-COB-24V-3.0W-XXX**	**LTR-P-24V-3W-XXX**	**LTR-P-WP-24V-3W-XXX**	
LTR-S-HO-24V-8W-XXX	**LTR-S-COB-24V-4.5W-XXX**	**LTR-P-24V-4.5W-XXX**	**LTR-P-WP-24V-5.8W-XXX**	
LTRS24V3W18D30K (DTW PWM)	**LTR-S-COBWP-24V-1.5W-XXX**	**LTR-P-24V-5.8W-XXX**	**LTR-E-24V-1.5W-XXX**	
LTRS24V3W18D27K (DTW PWM)	**LTR-S-COBWP-24V-3.0W-XXX**	**LTR-P-24V-8W-XXX**		

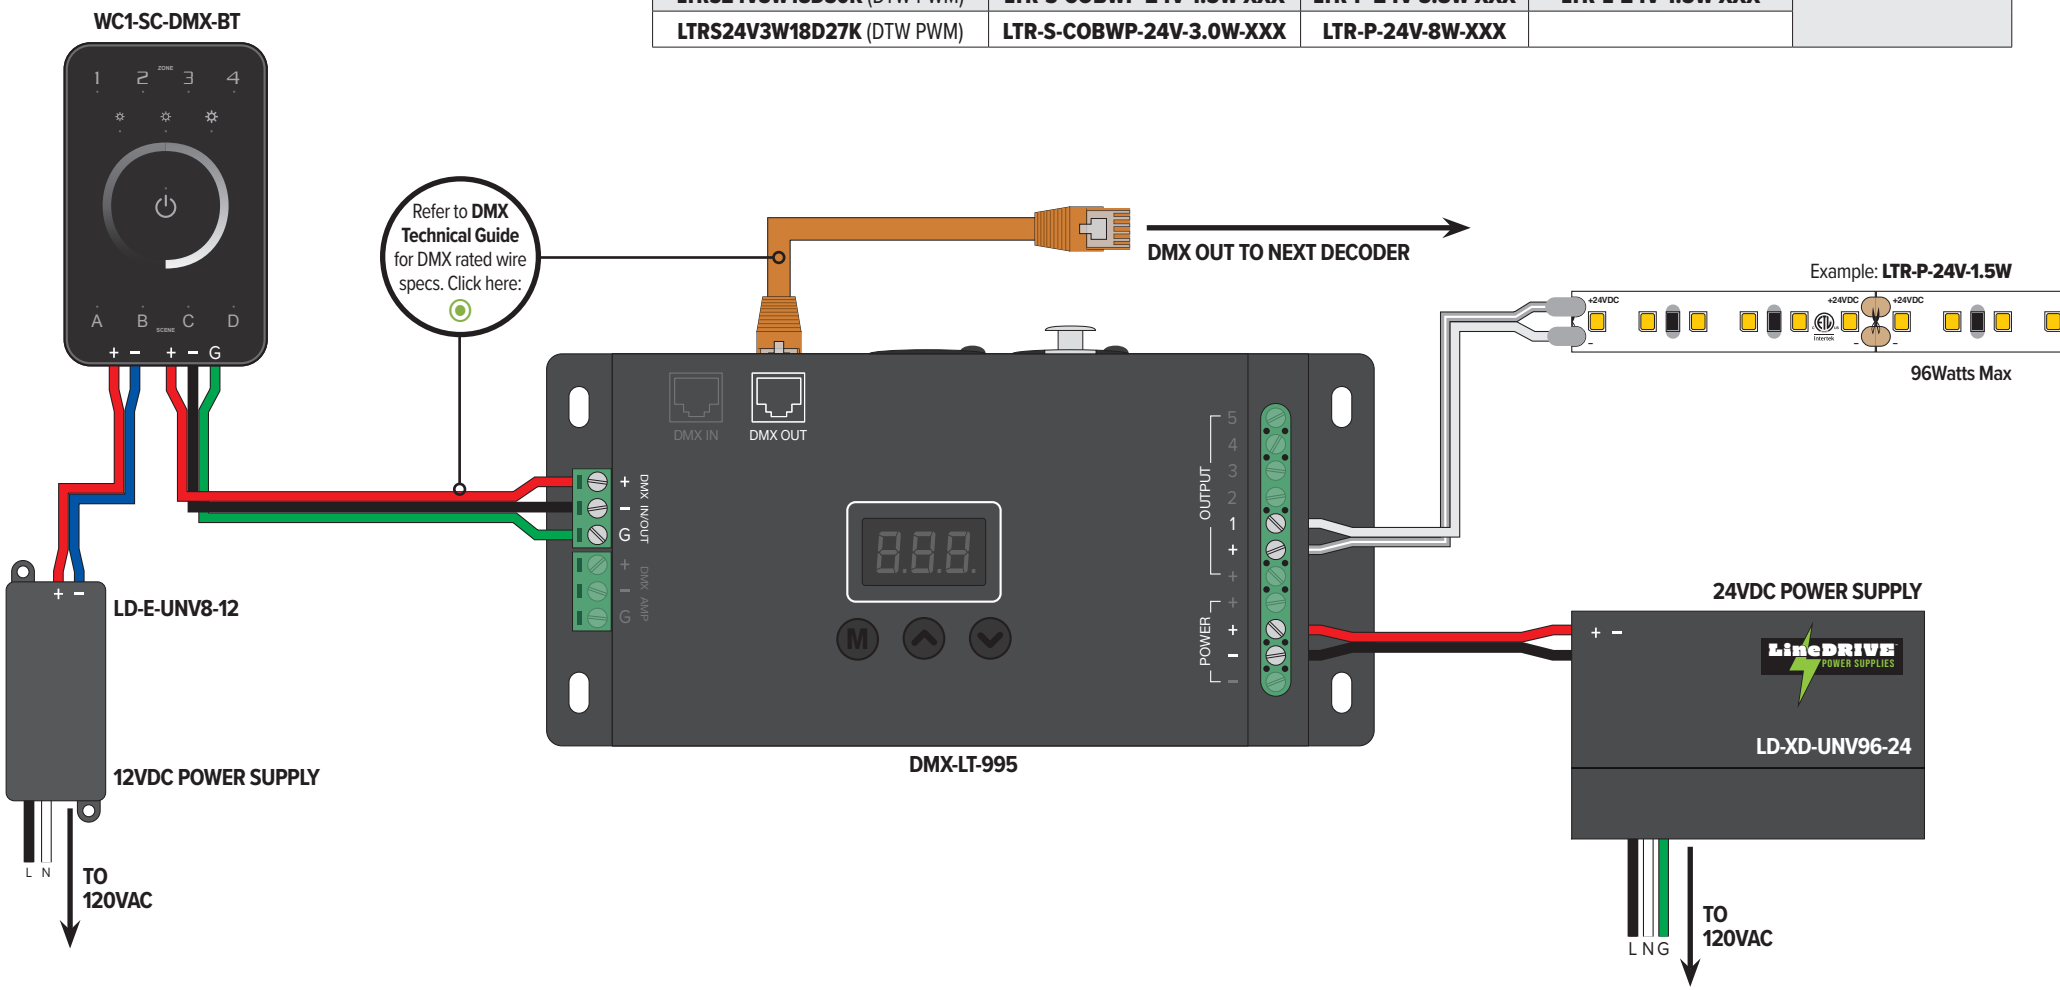


Low Voltage System Notes

- LED load and driver MUST operate at the same voltage for each system
- Other drivers can be used if each output is ≤ max wattage rating of drivers in diagrams
- Check control specs to identify other approved drivers
- Driver wattage output must be ≥ load wattage on each controller or repeater
- 96 watt max per device for 24 volt systems (Class 2 safety)
- 60 watt max per device for 12 volt systems (Class 2 safety)
- Do not exceed max tape length runs or max wattage limits for specific products

©2026 GM LIGHTING, LLC • www.gmlighting.net • Specifications subject to change without notice
18700 Ridgeland Ave., Tinley Park, IL 60477 • Toll-Free: 866.671.0811 FAX: 708.478.2640 • tech@gmlighting.net

LEDTASK LTR LED TAPE WIRING DIAGRAMS
for GM 24VDC RGBW LED Tape / DMX Controls

24VDC RGBW LED Tape: Four Channel	Five Wire	DMX Controls
LTR-S-24V-3.0W-RGBW		WC4-RGBW-DMX-BT DMX-LT-995
LTR-S-24V-6.0W-RGBW		
LTR-S-24V-WP-3.0W-RGBW		

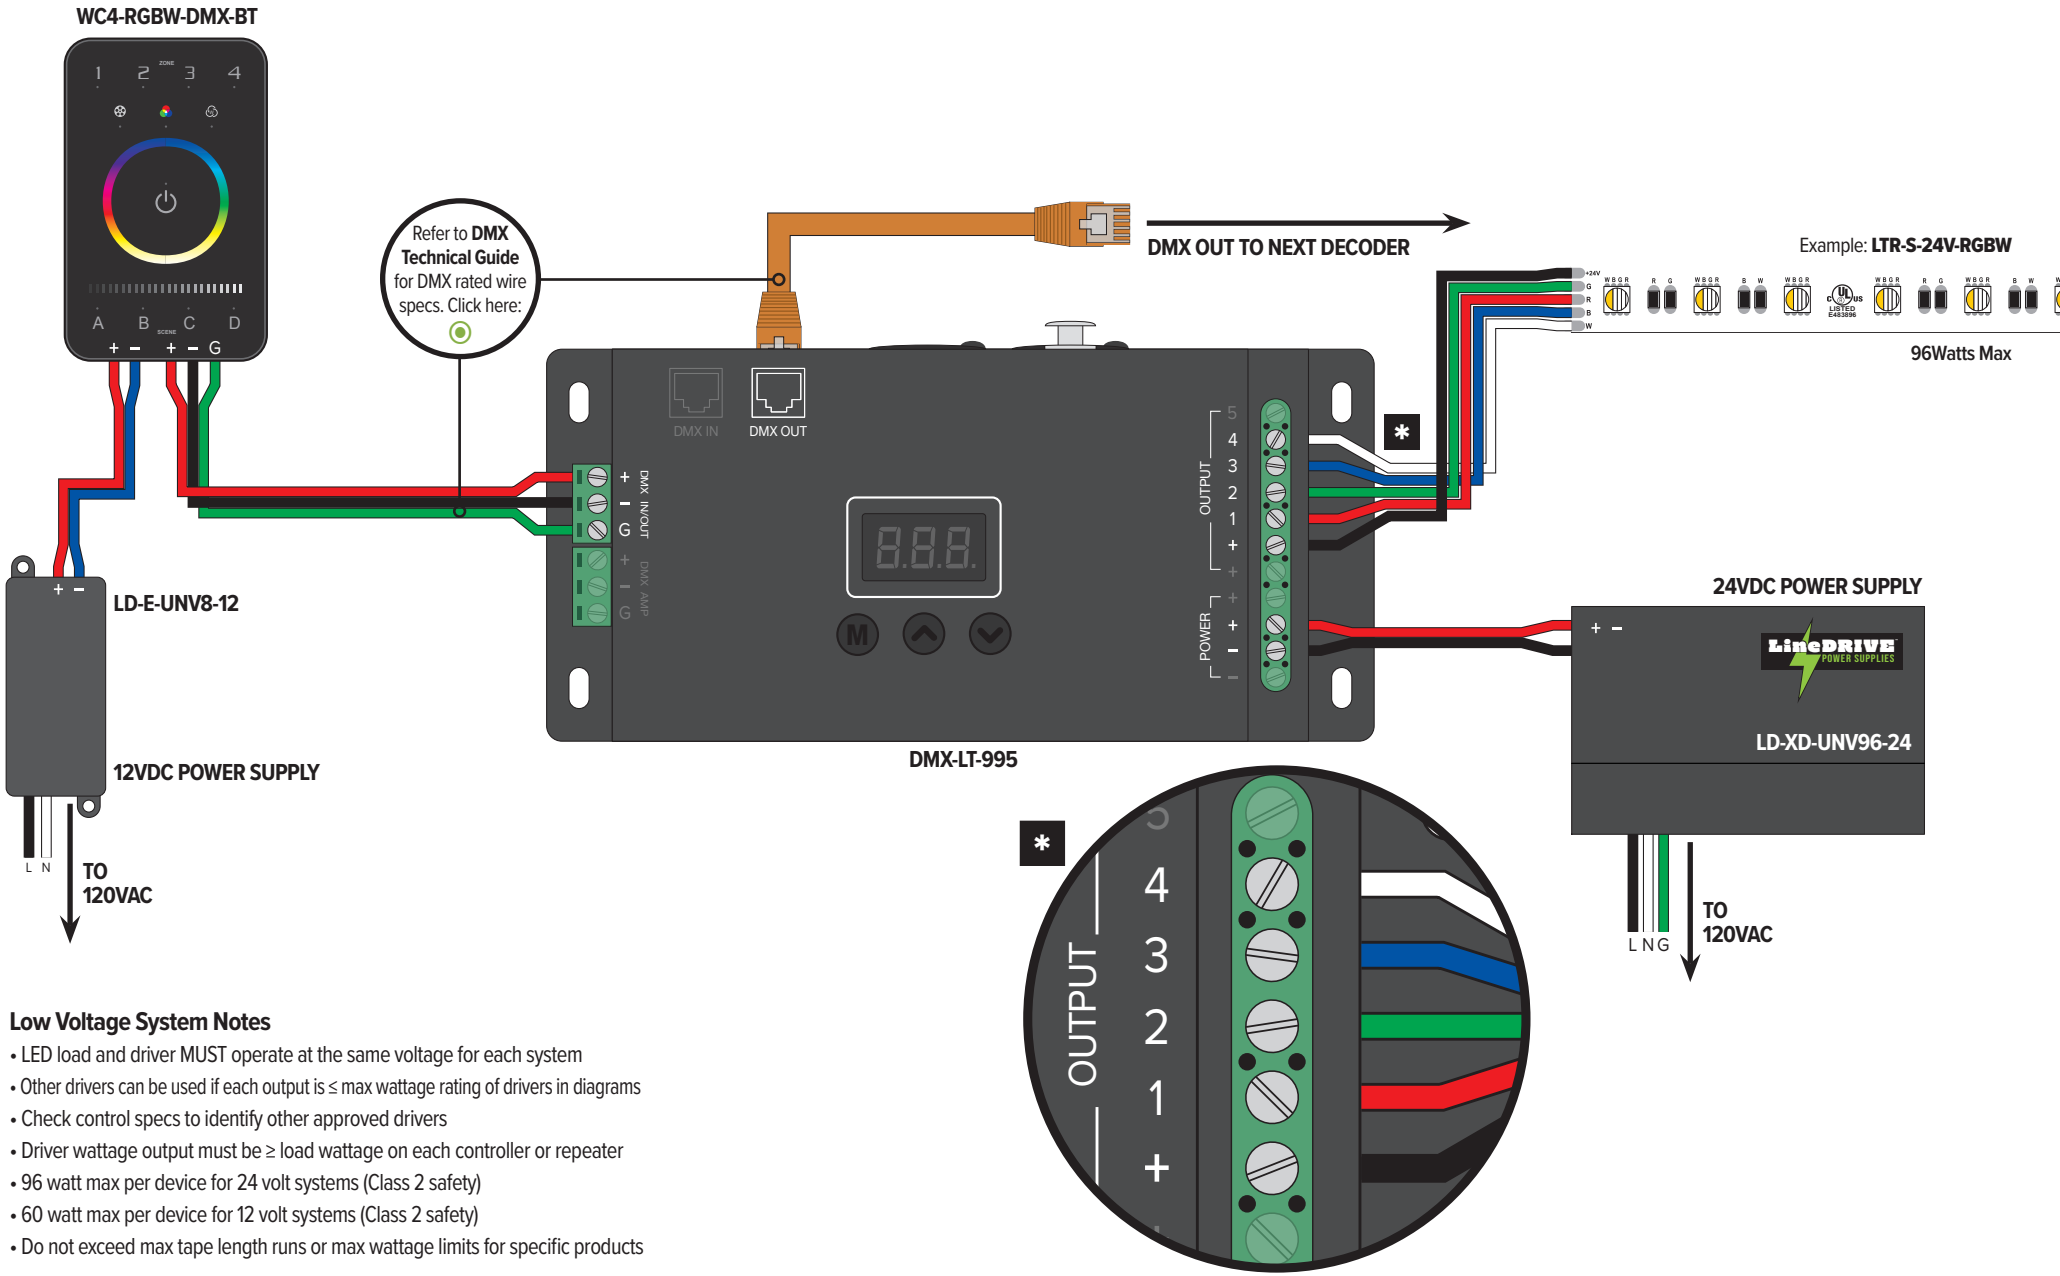


Low Voltage System Notes

- LED load and driver MUST operate at the same voltage for each system
- Other drivers can be used if each output is ≤ max wattage rating of drivers in diagrams
- Check control specs to identify other approved drivers
- Driver wattage output must be ≥ load wattage on each controller or repeater
- 96 watt max per device for 24 volt systems (Class 2 safety)
- 60 watt max per device for 12 volt systems (Class 2 safety)
- Do not exceed max tape length runs or max wattage limits for specific products

©2026 GM LIGHTING, LLC • www.gmlighting.net • Specifications subject to change without notice
18700 Ridgeland Ave., Tinley Park, IL 60477 • Toll-Free: 866.671.0811 FAX: 708.478.2640 • tech@gmlighting.net

LEDTASK LTR LED TAPE WIRING DIAGRAMS
for GM 24VDC RGBTW LED Tape / DMX Controls

24VDC RGBTW LED Tape: Five Channel | Six Wire	DMX Controls
LTR-S-COB-24V-5W-RGBTW	WC5-RGBTW-DMX-BT DMX-LT-995

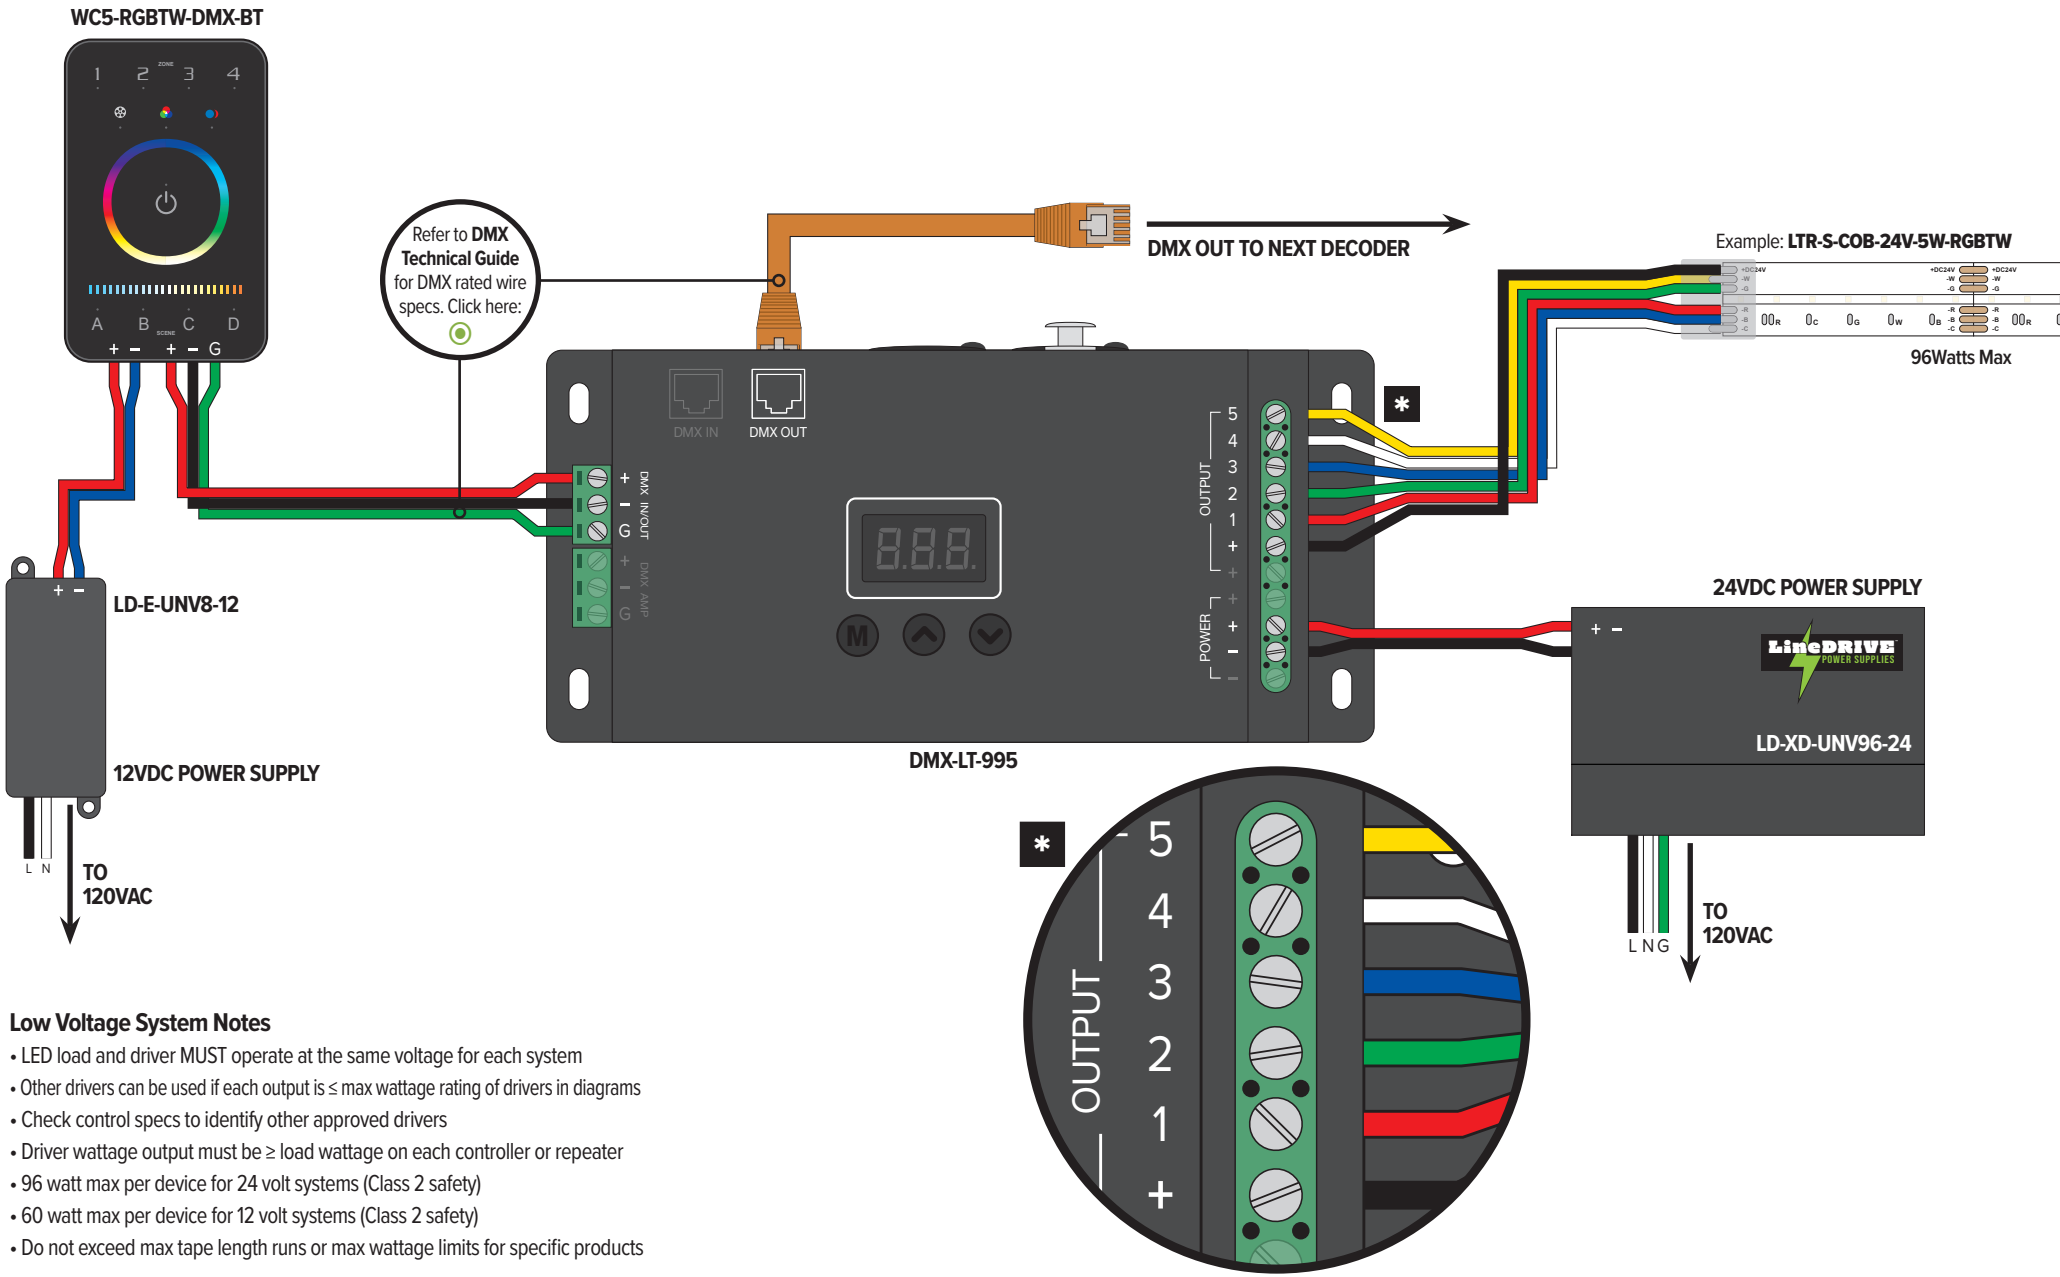

Low Voltage System Notes

- LED load and driver MUST operate at the same voltage for each system
- Other drivers can be used if each output is ≤ max wattage rating of drivers in diagrams
- Check control specs to identify other approved drivers
- Driver wattage output must be ≥ load wattage on each controller or repeater
- 96 watt max per device for 24 volt systems (Class 2 safety)
- 60 watt max per device for 12 volt systems (Class 2 safety)
- Do not exceed max tape length runs or max wattage limits for specific products

©2026 GM LIGHTING, LLC • www.gmlighting.net • Specifications subject to change without notice
18700 Ridgeland Ave., Tinley Park, IL 60477 • Toll-Free: 866.671.0811 FAX: 708.478.2640 • tech@gmlighting.net