GeoTask™

120V 90+ CRI Surface Mount Wet Location LED Light Squares

GMLighting®

Project Name	Type
Catalog #	Date


120 VOLT | 90+ CRI | INDOOR WET LOCATION | TITLE 24-JA8 | ADA | ETL Intertek | 5 Yr. WARRANTY

PRODUCT OVERVIEW

GeoTask™ 120V 90 CRI Wet Location LED Surface Mount Light Squares are perfect for accent lighting, hospitality lighting, task lighting, light mosaics, entertainment centers kitchen, bath and vanity, residential and commercial lighting. Complies with ADA when wall mounted.

FEATURES

- 5CCT Selectable: 2700K / 3000K / 3500K / 4000K / 5000K
- 120V
- Dimmable (Triac)
- Shallow profile
- Mounts to standard J-Box
- Edge-Lit Technology for diode-free illumination

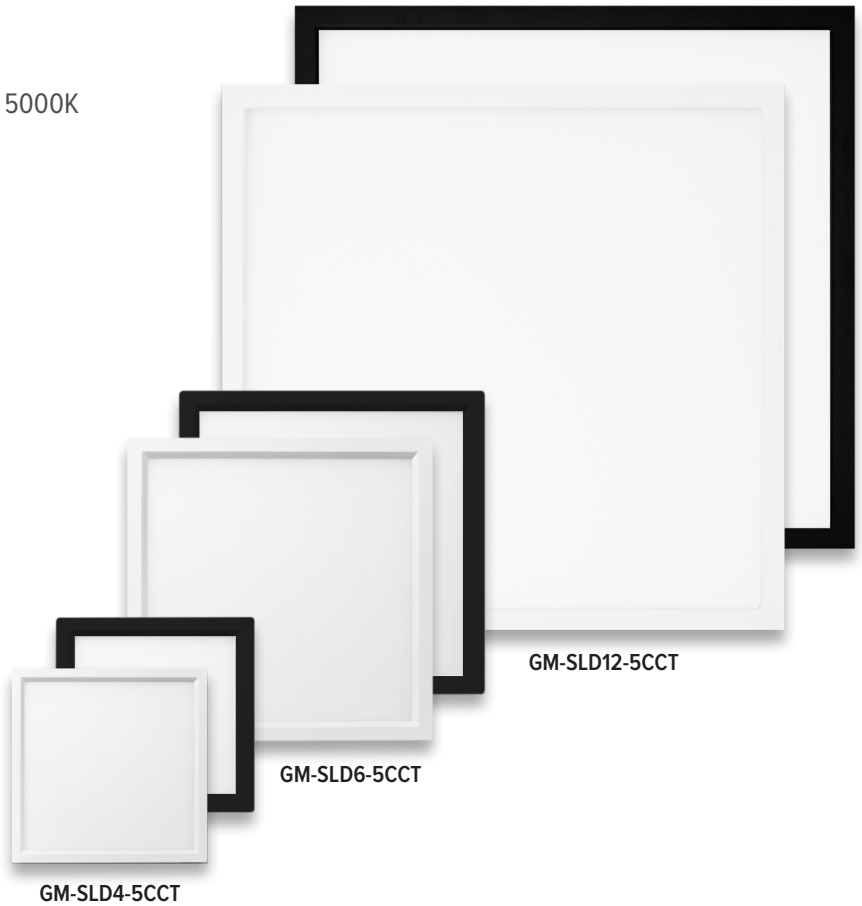

SPECIFICATIONS

ELECTRICAL

- 120V
- 10W / 15W / 22W

CERTIFICATIONS

- ETL
- Title 24 / JA8
- Ceiling Mount: Wet location, indoor covered ceiling only
- Wall Mount: Dry or damp location, indoor only, ADA compliant

PHOTOMETRIC

- 90+ CRI
- 5CCT Selectable: 2700K / 3000K / 3500K / 4000K / 5000K

OPERATING TEMP

- -4°F to 104°F (-20°C to 40°C)

WARRANTY

- 5 years

ORDERING INFORMATION

EXAMPLE: GM-SLD6-5CCT-WH

Catalog No.	Size	Color Temp	Finish
GM-SLD	**4**" (Diameter)	**5CCT** Selectable: 2700K / 3000K / 3500K / 4000K / 5000K	**WH** (White) / **BK** (Black)
	6" (Diameter)		
	12" (Diameter)		

©2026 GM LIGHTING, LLC • www.gmlighting.net • Specifications subject to change without notice
18700 Ridgeland Ave., Tinley Park, IL 60477 • Toll-Free: (866) 671-0811 FAX: (708) 478-2640 • tech@gmlighting.net

GeoTask™


120V 90+ CRI Surface Mount
Wet Location LED Light Squares


GMLighting®

PHOTOMETRIC INFORMATION


Catalog No.	Wattage	2700K	3000K	3500K	4000K	5000K
GM-SLD4-5CCT	10W	769 lm	783 lm	801 lm	807 lm	811 lm
GM-SLD6-5CCT	15W	1238 lm	1279 lm	1349 lm	1345 lm	1302 lm
GM-SLD12-5CCT	22W	1250 lm	1297 lm	1363 lm	1372 lm	1302 lm

DIMENSIONS

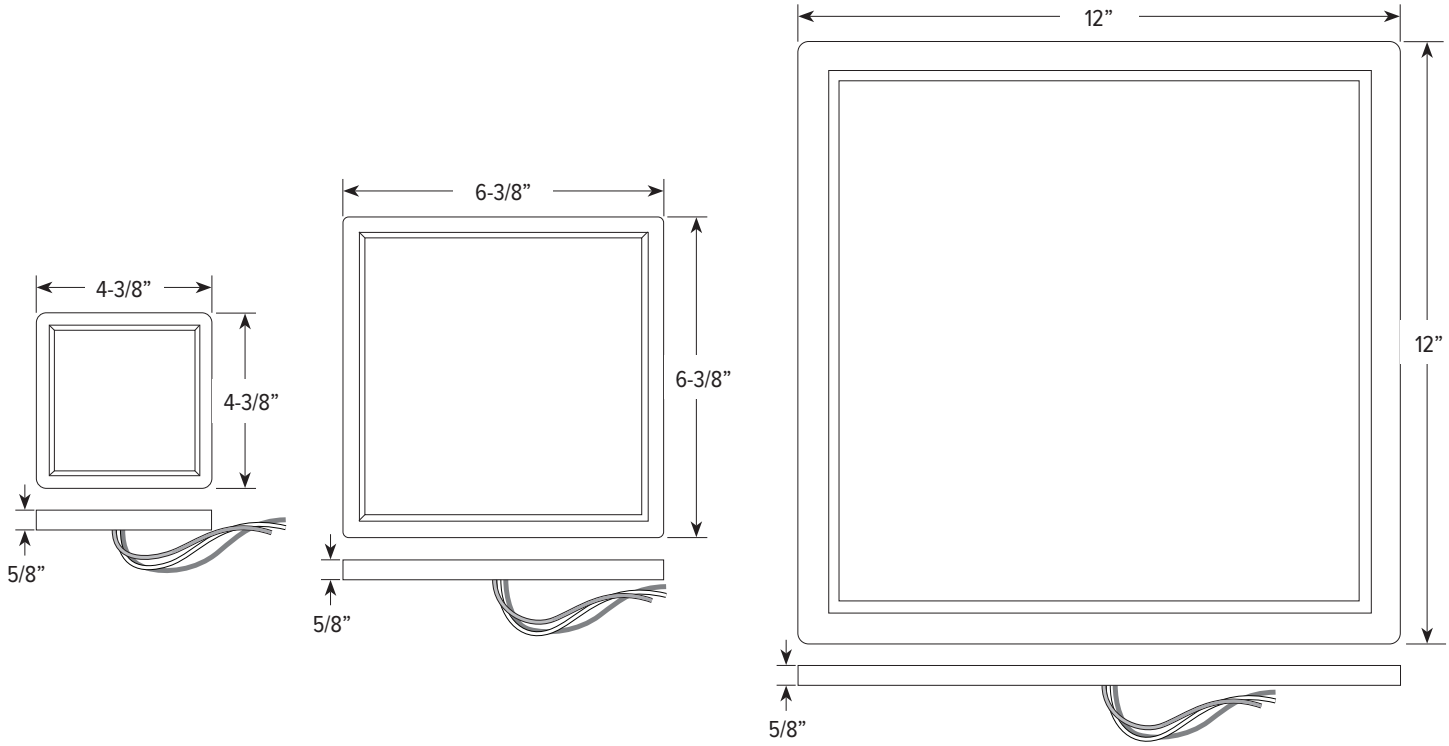



Standard
Junction Box
(Not Included)

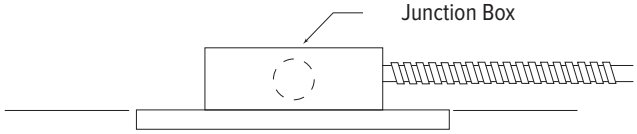

NOTE: Mounts to 2-3/4” or 3-1/2” standard junction box

NOTES:

12” not compatible with mud in ring or pancake box

Fixture has gasket to seal at outer edge for smooth surfaces. For improved seal against water entry or for uneven surfaces, use silicone sealant to fill gaps between the fixture and mounting surface.

©2026 GM LIGHTING, LLC • www.gmlighting.net • Specifications subject to change without notice
18700 Ridgeland Ave., Tinley Park, IL 60477 • Toll-Free: (866) 671-0811 FAX: (708) 478-2640 • tech@gmlighting.net