

12VDC LTAB DIMMABLE HIGH OUTPUT UNDERCABINET LIGHTBAR



Project Name	Type
--------------	------

Catalog #	Date
-----------	------


PRODUCT OVERVIEW

Ideal for outdoor wet bar and commercial kitchen applications. GM Lighting's LTAB-N Series provides high output energy efficient LED lighting in an enclosed sealed aluminum housing. Suitable for installations from -12°F to 120°F. Approved for indoor and outdoor use.



FEATURES

- Rated at 2W (8"), 4W (16") and 6W (24")
- 2700K, 3500K, 5500K
- 120° viewing angle
- Dimmable
- Maximum run: 20'
- Mounts with 3M VHB™ double stick tape
- Flexible lightbar to lightbar and lightbar to power supply connectors available
- Available in 8", 16" and 24" nominal lengths (see ordering information for actual length)
- ETL listed
- 5 year warranty when used with GM power supplies

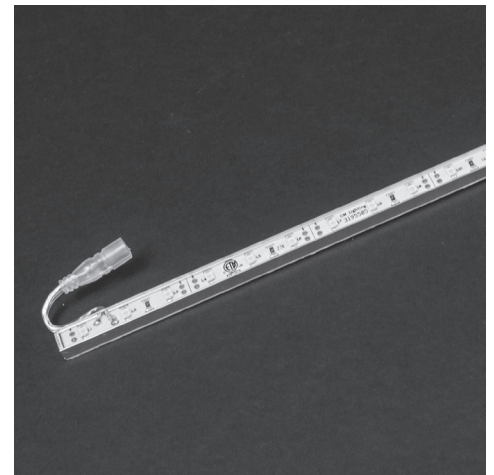

SPECIFICATIONS

- Extruded aluminum construction, only 1/4" thick
- Clear epoxy shielding for wet location use
- Do not submerge in water
- Connectors available
- Class 2
- Dimmable. For a complete list of applicable dimmers, please consult product page on website.

ELECTRICAL

- 12VDC
- Each LED is 0.16W = 3.04W per foot

ELECTRICAL CONTINUED

- Amps: 8": 0.14A, 16": 0.26A, 24": 0.438A

OPTICS

- 2700K, 3500K, 5500K
- Clear epoxy shield

CERTIFICATION

- ETL

WARRANTY

- 5 year warranty

ORDERING INFORMATION

Example: LTAB-N-8-27

Catalog No.	Length	Wattage	Lumens	Color Temp.	Finish
LTAB-N-8-27	7-3/4" / 197mm	2W / bar	93 / bar	2700K	Brushed Aluminum
LTAB-N-16-27	15-1/4" / 387mm	4W / bar	185 / bar	2700K	Brushed Aluminum
LTAB-N-24-27	23-5/8" / 600mm	6W / bar	304 / bar	2700K	Brushed Aluminum
LTAB-N-8	7-3/4" / 197mm	2W / bar	109 / bar	3500K	Brushed Aluminum
LTAB-N-16	15-1/4" / 387mm	4W / bar	207 / bar	3500K	Brushed Aluminum
LTAB-N-24	23-5/8" / 600mm	6W / bar	327 / bar	3500K	Brushed Aluminum
LTAB-N-8-PW	7-3/4" / 197mm	2W / bar	121 / bar	5500K	Brushed Aluminum
LTAB-N-16-PW	15-1/4" / 387mm	4W / bar	221 / bar	5500K	Brushed Aluminum
LTAB-N-24-PW	23-5/8" / 600mm	6W / bar	307 / bar	5500K	Brushed Aluminum

This lightbar includes attached 3M double stick mounting tape, (2) plastic mounting clips, (4) stainless steel screws, (1) male plug to seal end of run and 2-way double stick tape for concealing connectors to mounting surface. (1) 24" lightbar to power supply connector (LTW-24-WP) included.

12VDC LTAB DIMMABLE HIGH OUTPUT UNDERCABINET LIGHTBAR



CONNECTORS AND ACCESSORIES


Catalog No.	Description
LTCWP-12	12" flexible lightbar to lightbar connector
LTCWP-24	24" flexible lightbar to lightbar connector
LTCWP-36	36" flexible lightbar to lightbar connector
LTCWP-60	60" flexible lightbar to lightbar connector
LTW-24-WP	24" flexible lightbar to power supply connector
LTW-48-WP	48" flexible lightbar to power supply connector
LTW-60-WP	60" flexible lightbar to power supply connector
LTAB-N-SB	(Pair) of swivel brackets with stainless steel screws
GMSB-W (B)	Splice box - White or Black - 2" L x 1" W x 5/8" D

DIMENSION

LED LightBars
can be butted together.



LTW-24-WP, LTW-48-WP,
LTW-60-WP LightBar
to power supply connector.



LTCWP-12, -24, -36, -60
LightBar to LightBar
flexible connector

