

LTR-S Specification Series

24VDC RGBW Wet Location LED Tape Specification Sheet

GMLighting®

Project Name	Type
--------------	------

Catalog #	Date
-----------	------

PRODUCT OVERVIEW

GM's RGBW is a quantum leap beyond RGB. With the addition of a 3000K White element, a virtually unlimited palette of color and brightness is enabled. For general activity use, utilize the white light component. Designed for outdoor (wet) location high quality light illumination. Available in 16'-4" (5M) or 32'-8" (10M) reels.

FEATURES

- RGB with 3000K White 4-in-One LED chip
- Wet (outdoor) location
- Cuttable every 4"
- Cut and cap only
- Custom lengths available - consult factory
- 60 LED's / meter
- 120° viewing angle
- 3M adhesive back
- Maximum run on a given lead is 32'-8"

SPECIFICATIONS

ELECTRICAL

- 24V
- 3W per foot

OPERATING TEMP

- -4°F to 122°F

CERTIFICATION

- UL
- Class 2
- Closet Rated

WARRANTY

- 5-year warranty when paired with GM power supply.



ORDERING INFORMATION

Example: LTR-S-24V-WP-3.0W-RGBW-16

Model	-	Series	-	Voltage	-	Location	-	Wattage	-	Type	-	Reel Length
LTR	-	S	-	24V	-	WP	-	3.0W	-	RGBW	-	16
LTR	-	S	-	24V	-	WP	-	3.0W	-	RGBW	-	32

ACCESSORIES

Model	Description
RGBW-WP-TTC3	RGBW wet location, tape to tape connector

NOTE: WET LOCATION TAPE IS NON-JOINABLE IN THE FIELD.
CUT AND CAP ONLY. RUN NOT TO EXCEED MAX. RUN LENGTH.

Your LED Tape Specification Checklist:

1. Select Tape
2. Select Connectors
3. Select Channels
4. Select Controllers
5. Select Power Supplies

INSTALL SHEET



LTR-S Specification Series


24VDC RGBW Wet Location LED Tape Specification Sheet



Catalog No.	Length	Wattage / ft.	Lumens in 3000K mode only	Type	Max. Run
LTR-S-24V-WP-3.0W-RGBW-16	16'-4" / 5M	3W	141	RGBW-WP	32'-8"
LTR-S-24V-WP-3.0W-RGBW-32	32'-8" / 10M	3W	141	RGBW-WP	32'-8"

Kelvin temperature (color) ±100K.
16'-4" reel includes 24" lead affixed to tape. RGBW-WP includes 48" lead affixed to tape and a cut and cap kit.

DIMENSION

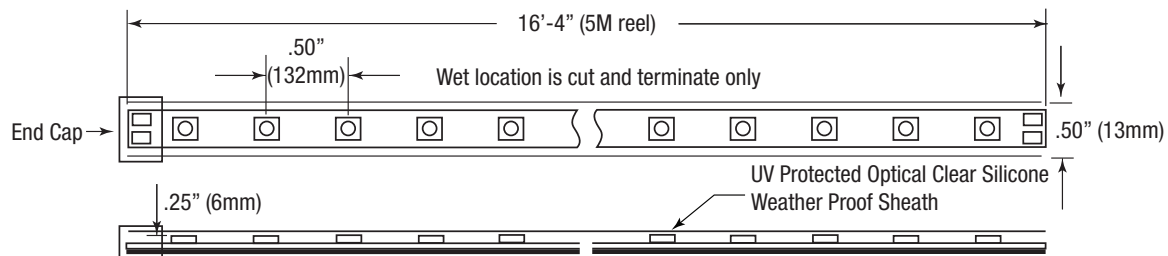

**All wet location connectors
are factory installed only**



RGBW-WP-TTC3
RGBW Wet Location 3" Tape to Tape Connector

LTR-S Specification Series

24VDC RGBW Wet Location LED Tape Specification Sheet



COMPATIBLE CONTROLLERS

Catalog No.	Description
SHWC-RGBW	LUXcontrol Smart 2.4 GHz WiFi Controller, Standard 12V/24V Low Voltage, RGBW, 4-Channel / 5-Wire
SHWC-RGBW-RPT	LUXcontrol Universal Smart Power Repeater
RGBW-RP	RGBW Repeater
DMX-LT-995	5-Channel DMX Decoder 12/24VDC 6A x 5CH 30A
RGBW-DMX-WC	DMX Wall Controller
HC-RF-UNV-5CH	Universal 1-5 Channel RF Remote Control*
CM-RF-UNV-5CH	Universal 1-5 Channel Control Module
RPT-UNV-5CH	Universal 1-5 Channel Repeater Amplifier

RECOMMENDED DRIVERS

Catalog No.	Description	Watts
LD-XD-UNV (Series)	LineDrive Electronic Multi-Dimmable Power Supply, 24VDC	40W, 60W, 96W, 180W, 200W, 300W
LD-EDWP-UNV (Series)	LineDRIVE Wet Location Power Supplies, 24VDC	30W, 60W, 90W

CORD AND PLUG DRIVERS

Catalog No.	Description	Watts	Weight	Dimensions
LTP24-48	24VDC - 48W - 2 amps - 120V - 120V Cord (72") and plug. Short circuit, overload protection - LED indicator for power on. UL listed	48W	1.8 lbs.	4.68"L x 2.05"W x 1.25"H
LTP24-90	24VDC - 90W - 3.75 amps - 120V - 120V Cord (72") and plug. Short circuit, overload protection - LED indicator for power on. UL listed	90W	1.8 lbs.	4.68"L x 2.05"W x 1.25"H

Please see our website for updated power supply specifications and information.

LTR-S Specification Series

24VDC RGBW Wet Location LED Tape Specification Sheet



COMPATIBLE CHANNELS - (fit RGBW-WP connectors on pg. 1)

EXTRA DEEP

Catalog No.	Description	Length	Dimensions
LED-CHL-XD	Extra deep format extruded channel. Includes snap-on frosted lens with mounting clips and screws.	4'	
LED-CHL-XD-6	Extra deep format extruded channel. Includes snap-on frosted lens with mounting clips and screws.	6'	
LED-CHL-XD-AMC	(2) Adjustable mounting brackets for LED-CHL-XD	N/A	
LED-CHL-XD-EC	(2) End caps for LED-CHL-XD. One solid, one with hole.	N/A	
LED-CHL-XD-MC	(2) Mounting clips and screws for LED-CHL-XD	N/A	

EXTRA DEEP FLANGED

LED-CHL-XD-F	Extra deep format extruded channel with flange. Includes snap-on frosted lens with mounting clips and screws.	4'	
LED-CHL-XD-F-6	Extra deep format extruded channel with flange. Includes snap-on frosted lens with mounting clips and screws.	6'	
LED-CHL-XD-F-DC	(2) Drywall mounting brackets for LED-CHL-XD-F	N/A	
LED-CHL-XD-F-EC	(2) End caps for LED-CHL-XD-F. One solid, one with hole.	N/A	

45° LARGE ANGLE MOUNT

LED-CHL-45-1200	Extruded angled (45°) channel. Includes snap-on frosted lens with mounting clips and screws.	4'	
LED-CHL-45-1200-EC	(2) End caps for LED-CHL-45 - one solid, one with hole	N/A	
LED-CHL-45-1200-MC	(2) Additional mounting clips for LED-CHL-45-1200	N/A	

WIDE


LED-CHL-W	Wide format extruded channel. Includes snap-on frosted lens with mounting clips and screws.	4'	
LED-CHL-W-6	Wide format extruded channel. Includes snap-on frosted lens with mounting clips and screws.	6'	
LED-CHL-W-AMC	(2) Adjustable mounting brackets for LED-CHL-W	N/A	
LED-CHL-W-EC	(2) End caps for LED-CHL-W - one solid, one with hole.	N/A	
LED-CHL-W-MC	(2) Additional mounting clips for LED-CHL-W	N/A	

LTR-S Specification Series



24VDC RGBW Wet Location LED Tape Specification Sheet

GMLighting®


SHWC-RGBW UXCONTROL WIFI CONTROLLER

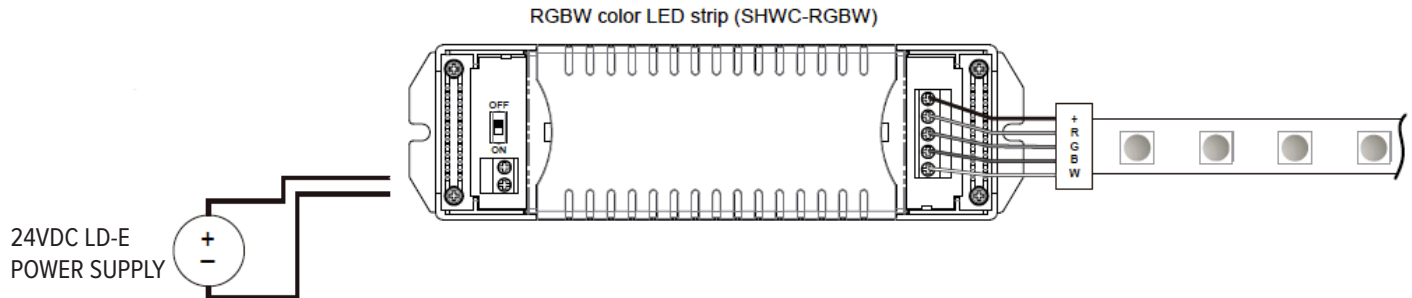


SHWC-RGBW and Repeater Wiring RGBW connection (4 channels)

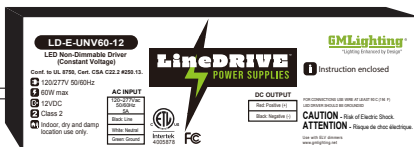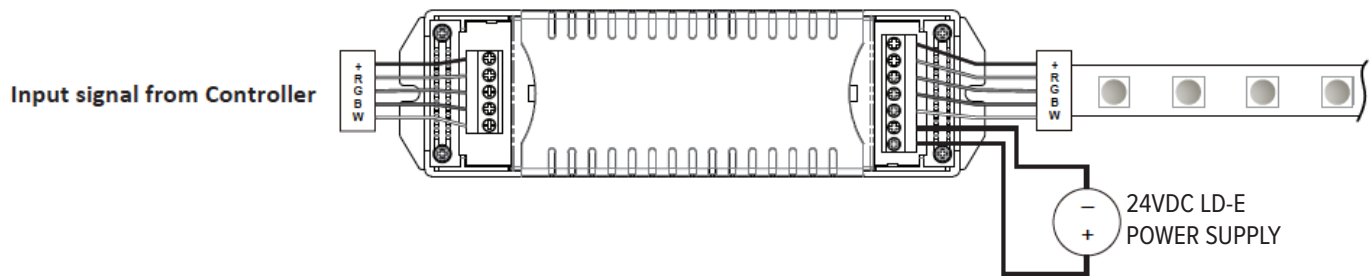

LineDRIVE™ Power Supply

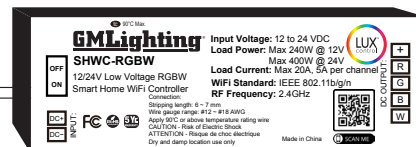

LUXcontrol™ Controller

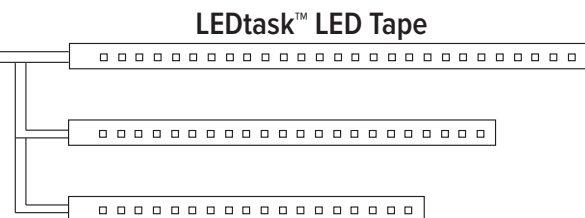

Expandable with universal power repeater
(SHWC-RGBW-RPT) for larger projects



Remote WiFi Control

LUXcontrol™ App




Router Signal

Note: For use with LD-E (non-dimmable) or LD-ED (dimmable) power supply only. Not compatible with LD-MD (magnetic) power supply.

LTR-S Specification Series

24VDC RGBW Wet Location LED Tape Specification Sheet


SHWC-RGBW LUXCONTROL WIFI CONTROLLER WIRING DIAGRAM

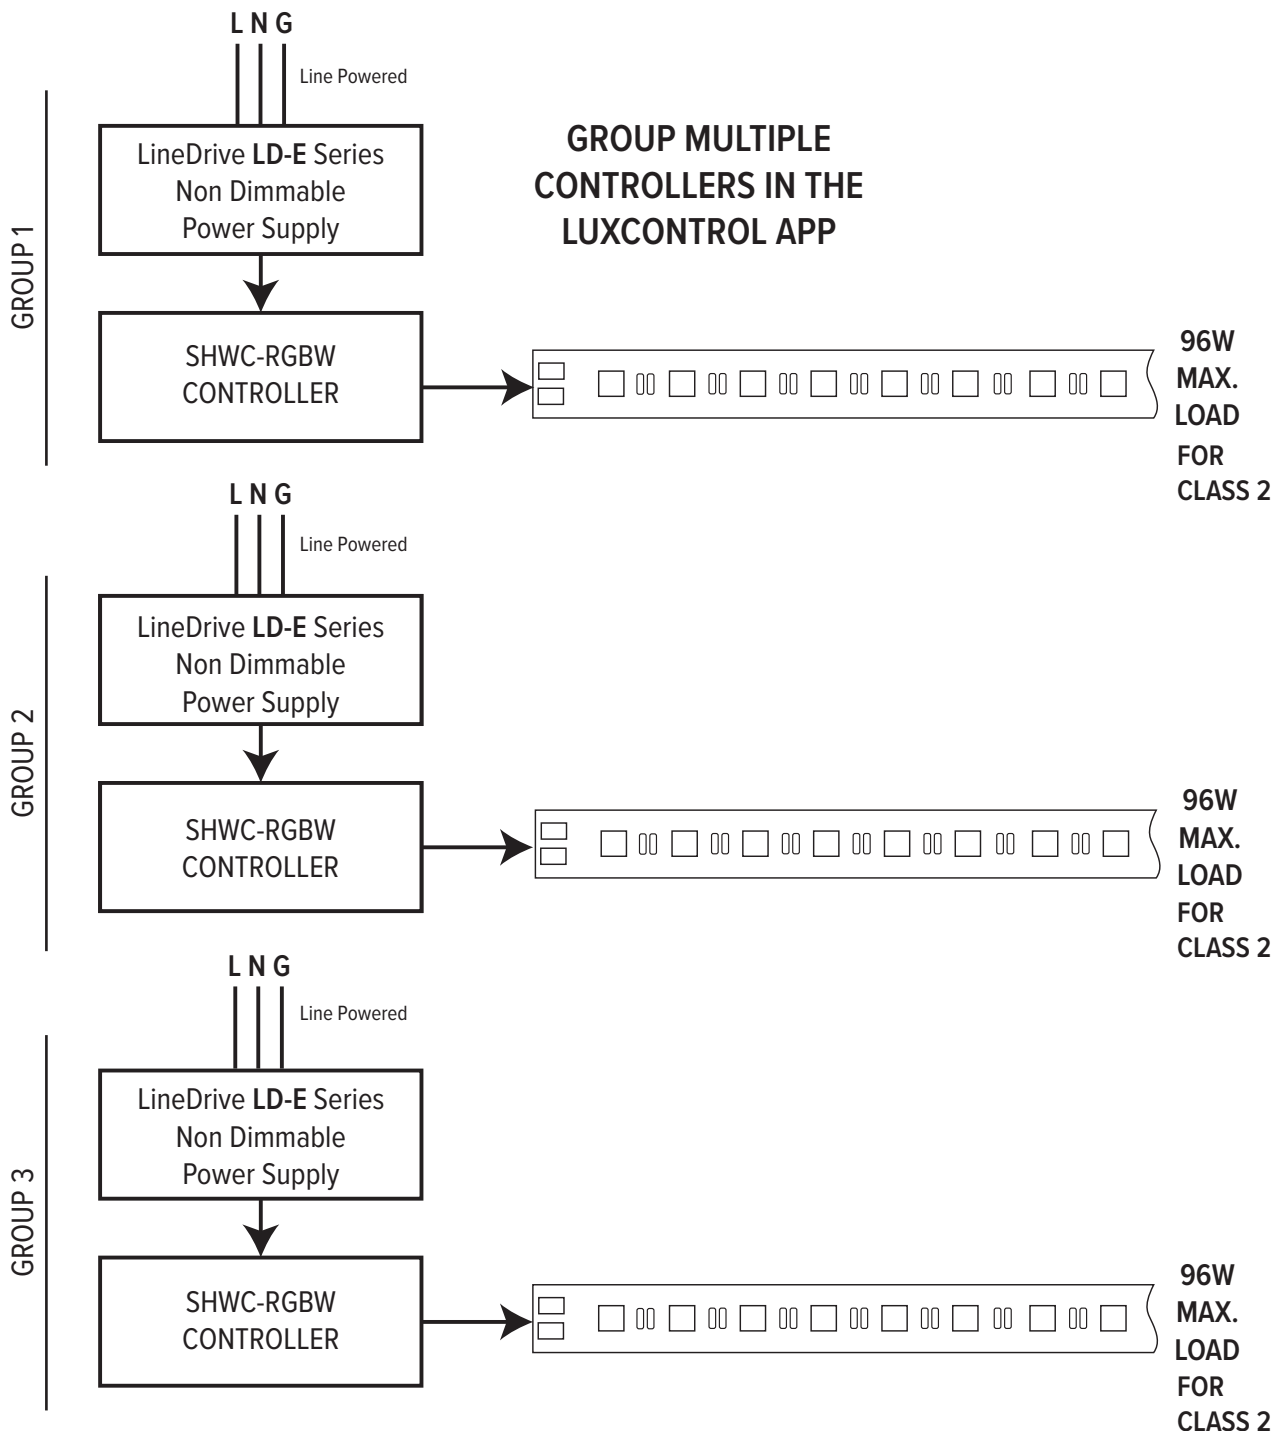

LTR-S Specification Series

24VDC RGBW Wet Location LED Tape Specification Sheet

SHWC-RGBW LUXCONTROL WIFI CONTROLLER WITH POWER REPEATER WIRING DIAGRAM

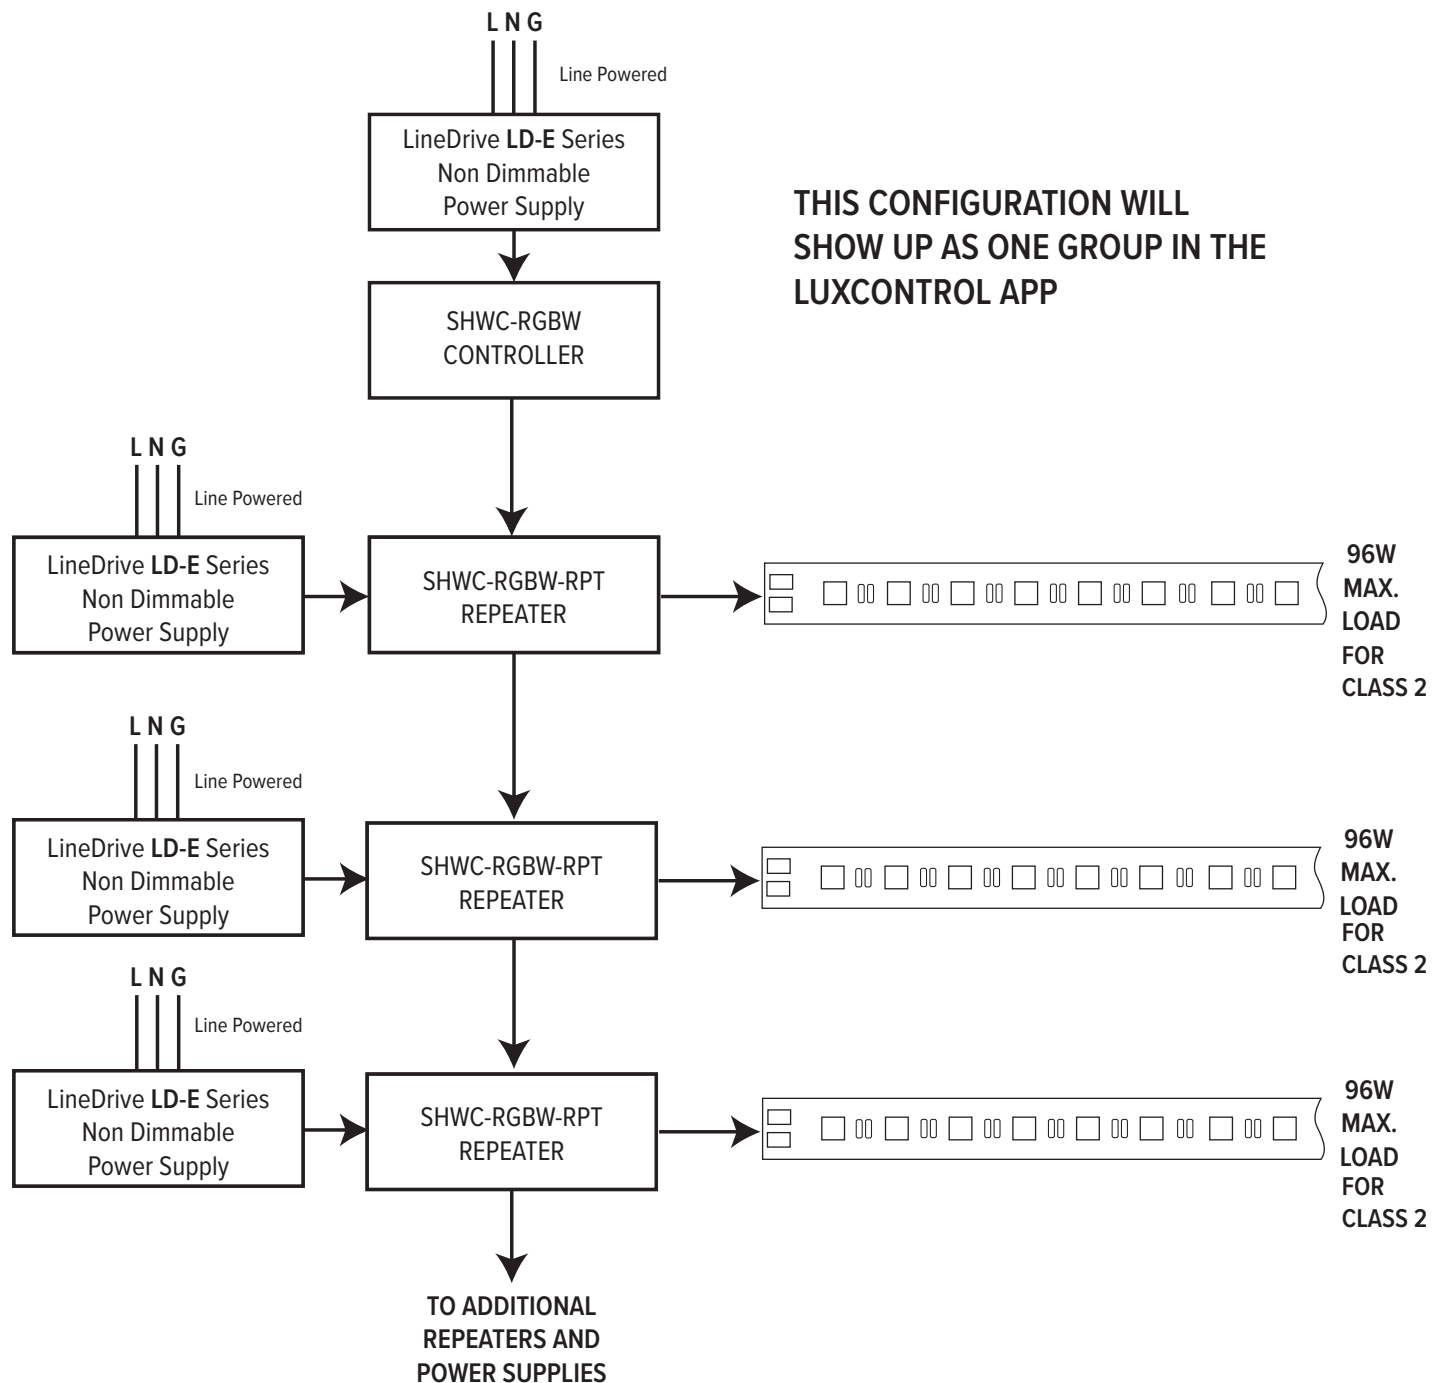


LTR-S Specification Series

24VDC RGBW Wet Location LED Tape Specification Sheet

GMLighting®

RGBW-DMX-WC DMX WALL CONTROLLER WIRING DIAGRAM

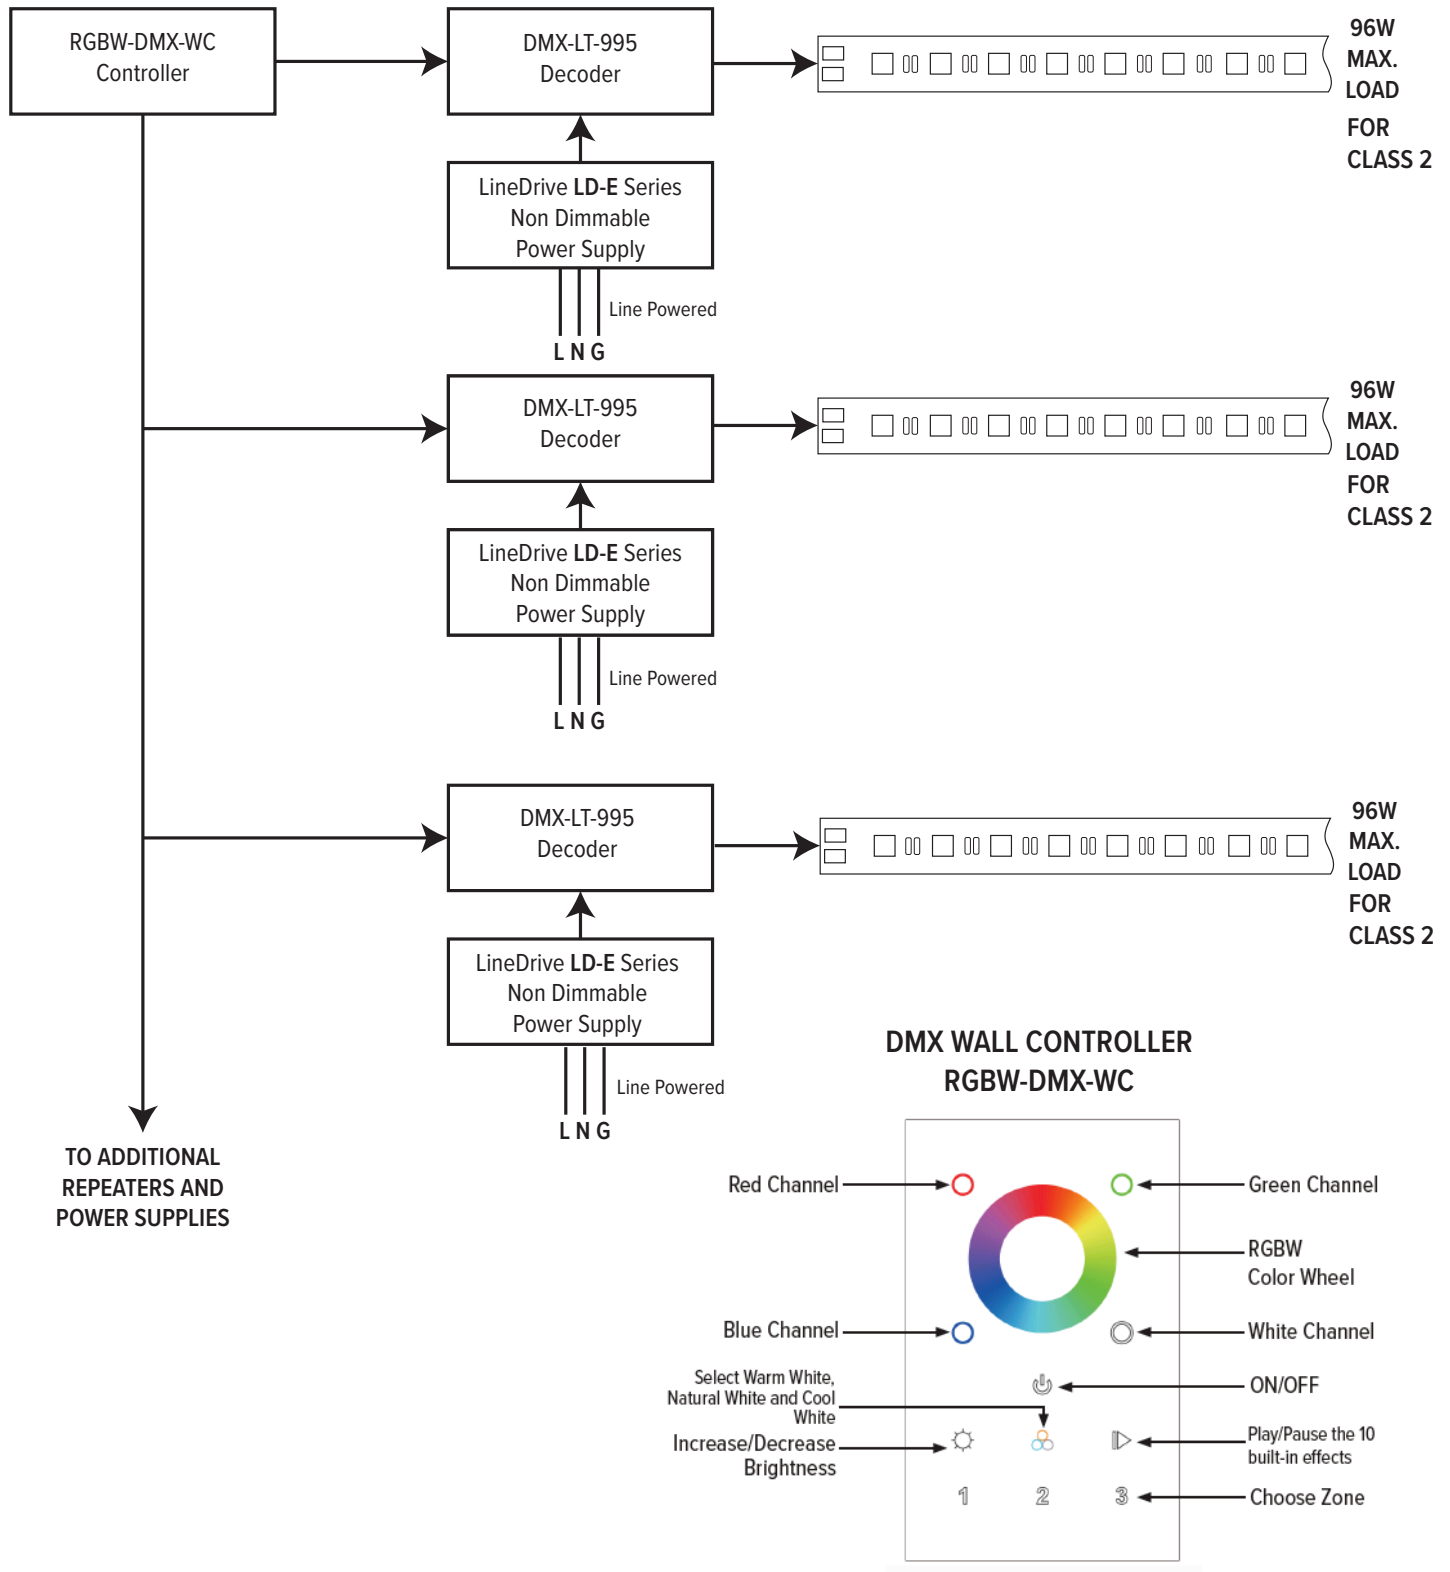



LTR-S Specification Series

24VDC RGBW Wet Location LED Tape Specification Sheet


GM Lighting®

RF HAND HELD REMOTE AND CONTROLLER SYSTEM


**RF Remote Control
HC-RF-UNV-5CH
with Built-In Effects**

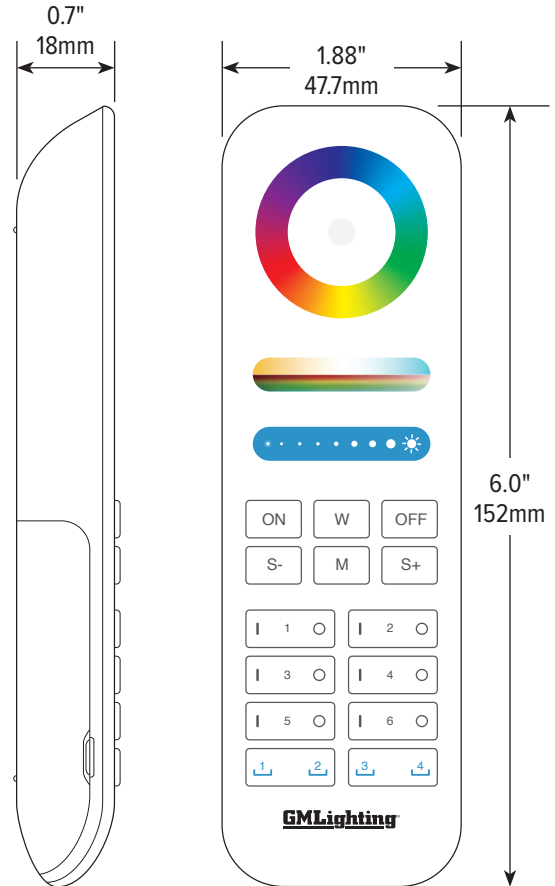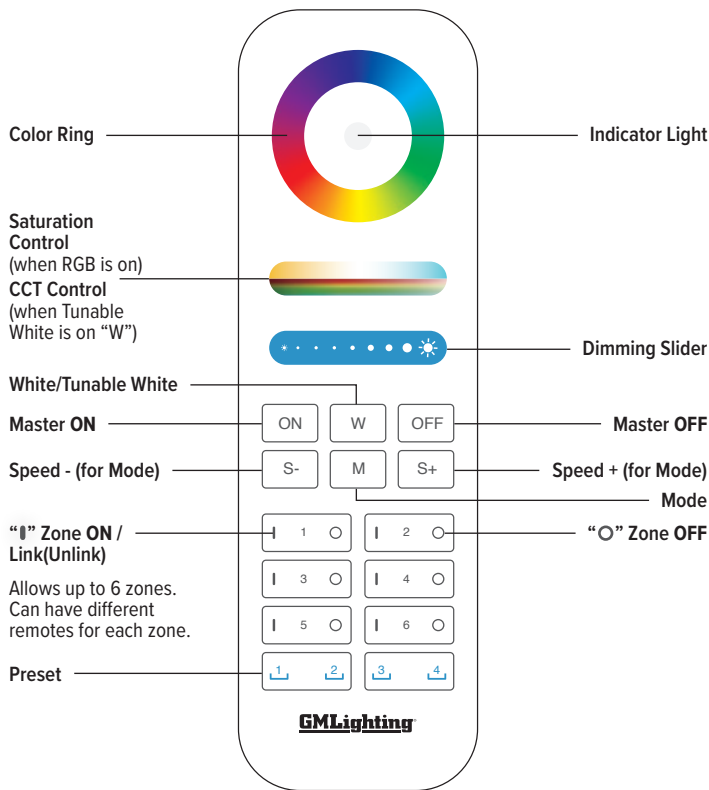

**Control Module
CM-RF-UNV-5CH**

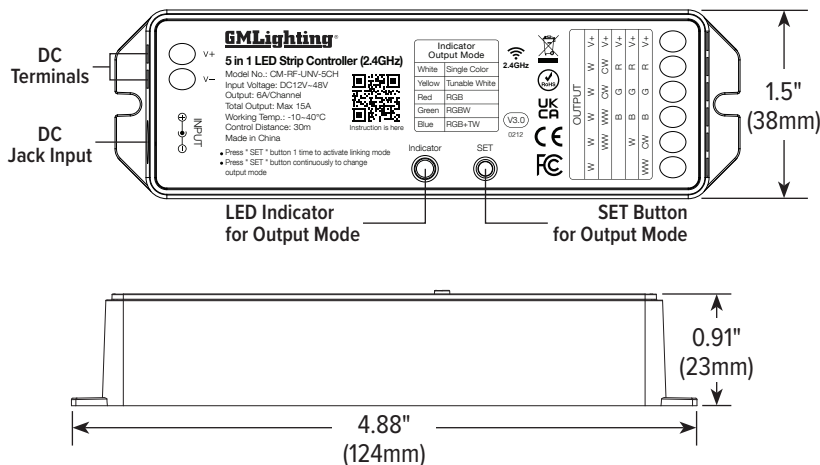

**Repeater Amplifier
RPT-UNV-5CH**

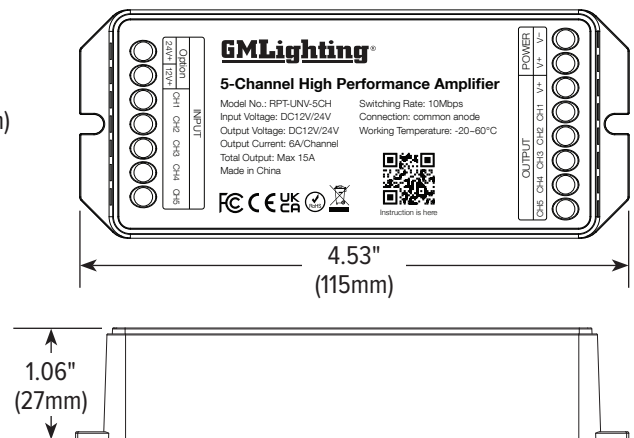

LTR-S Specification Series

24VDC RGBW Wet Location LED Tape Specification Sheet

GMLighting®

UNIVERSAL RF CONTROLLER WIRING DIAGRAM

Incoming power for (L N G) options can be 120V or 277V.
Check power supply for proper input voltage and output power required.
Power Supply output voltage must match LED operating voltage. (24VDC)
Power supply used **MUST NOT BE DIMMED** at the input to properly power the controls.
See Controller instructions for pairing and wiring details.

