LTR-S Specification Series

8W, 24VDC High Output
LED Tape Specification Sheet

GMLighting®

Project Name	Type
Catalog #	Date


24 VOLT | DRY LOCATION | CLASS 2 | TITLE 24 | LUX control | Intertek | 90+ CRI | 5 Yr. WARRANTY

PRODUCT OVERVIEW

Our Specification Series provides the ultimate architectural-grade option. Incorporating features that defines the Spec Series as truly state of the art linear LED tape for applications that not only require, but demand the best optics in the industry.

FEATURES

- Available in multiple CCT temperatures
- 10mm PCB width
- Over 1000 lumens/ft.
- Cuttable every 2" (8 LEDs)
- Compatible with LUxcontrol WiFi system
- Custom lengths available - consult factory
- 120° viewing angle
- Dimmable
- 3M adhesive back
- Maximum run on a given lead is 12'

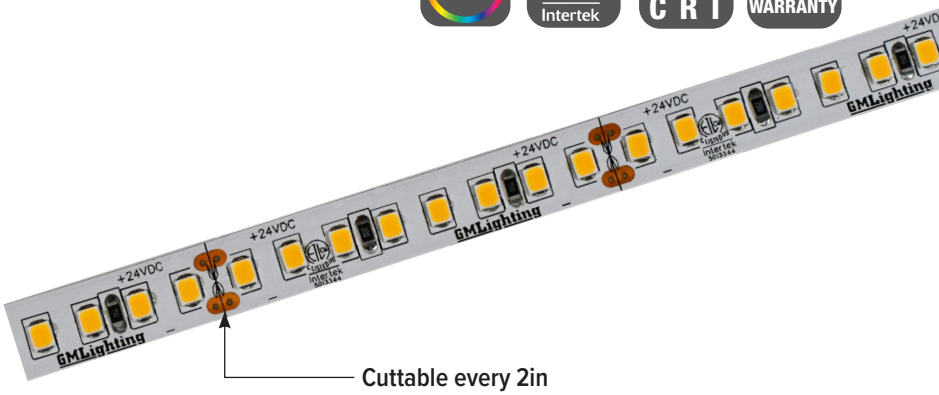

SPECIFICATIONS

ELECTRICAL
- 24V
- 8.0 watts per foot

OPTICS
- 90+ CRI

AMBIENT OPERATING TEMP
- -4F to 122 F

MOUNTING SURFACE
- Must be rated for 140°F min.

CERTIFICATION
- ETL
- Title 24 compliant when used with used with specific drivers. Consult factory.
- Class 2
- IP20

WARRANTY
- 5-year warranty when paired with GM power supply

Note: For proper thermal management, this tape must be installed in an aluminum mounting channel. See next page for compatible channel list.

ORDERING INFORMATION

Example: LTR-S-24V-8W-27K-12

Model	-	Series	-		Voltage	Wattage	Color Temp	Reel Length
LTR		S		HO	24V	8W	27K	XX
							30K	
							35K	100
							40K	

Reel Length: XX = per foot, enter length; 100 = 98'6"

ACCESSORIES

Model	Description
ESTC-1	Sure-Tite tape to tape connector
ESTC-90	Sure-Tite 90° connector
ESTLK-60	Sure-Tite 60" adjustable tape to tape connector
ESTW-60	Sure-Tite 60" adjustable tape to power connector
ESTW-CO	Sure-Tite tape to power supply connector (no wire)

Your LED Tape Specification Checklist:

1. Select Tape
2. Select Connectors
3. Select Channels
4. Select Controllers or Dimmers
5. Select Power Supplies

Install Sheet

©2026 GM LIGHTING, LLC • www.gmlighting.net • Specifications subject to change without notice
18700 Ridgeland Ave., Tinley Park, IL 60477 • Toll-Free: (866) 671-0811 FAX: (708) 478-2640 • tech@gmlighting.net

LTR-S Specification Series

8W, 24VDC High Output
LED Tape Specification Sheet

GMLighting®

Catalog No.	Length	Lumens/Ft.	CRI	Color Temp.	Max. Run
LTR-S-HO-24V-8W-27K-FT/100	98'-6" reels or Custom Cuts - Consult Factory	1115	90+	2700K	12'
LTR-S-HO-24V-8W-30K-FT/100		1143	90+	3000K	12'
LTR-S-HO-24V-8W-35K-FT/100		1148	90+	3500K	12'
LTR-S-HO-24V-8W-40K-FT/100		1201	90+	4000K	12'

Kelvin temperature (color) ±100K.
Each factory cut comes with 48" soldered lead

COMPATIBLE CONTROLLERS

Model	Description
SHWC	LUXcontrol Smart 2.4 GHz WiFi Controller, Standard 12V/24V Low Voltage
SHWD	LUXcontrol Smart 2.4 GHz WiFi Dimmer, Standard 12V/24V Low Voltage
SWDD60W24V	SwitchLD All-in-One Dimmer and Driver, 60W, 24VDC
SWDD96W24V	SwitchLD All-in-One Dimmer and Driver, 96W, 24VDC
HC-RF-UNV-5CH	Universal 1-5 Channel RF Remote Control
CM-RF-UNV-5CH	Universal 1-5 Channel Control Module
RPT-UNV-5CH	Universal 1-5 Channel Repeater Amplifier

RECOMMENDED DRIVERS

Catalog No.	Description	Watts	Specification Sheet
LD-XD-UNV	LineDrive Electronic Multi-Dimmable Power Supply 24VDC	20W, 40W, 60W, 96W, 180W, 200W, 300W	View Spec Sheet
LD-MD-UNV	LineDrive Magnetic Dimmable Power Supply 24VDC	30W, 60W, 96W, 150W, 200W, 300W	View Spec Sheet
LD-EDM	LineDrive Electronic Dimmable MINI Power Supply 24VDC	60W	View Spec Sheet
LTP	Cord and Plug Power Supply 24VDC	25W, 48W, 60W, 90W	View Spec Sheet
PSD	Electronic Dimmable Power Supply 24VDC	15W, 24W, 60W, 90W	View Spec Sheet

NOTE: Please see our website for updated power supply specifications and information.


©2026 GM LIGHTING, LLC • www.gmlighting.net • Specifications subject to change without notice
18700 Ridgeland Ave., Tinley Park, IL 60477 • Toll-Free: (866) 671-0811 FAX: (708) 478-2640 • tech@gmlighting.net


LTR-S Specification Series

8W, 24VDC High Output
LED Tape Specification Sheet

GMLighting®


DIMENSION

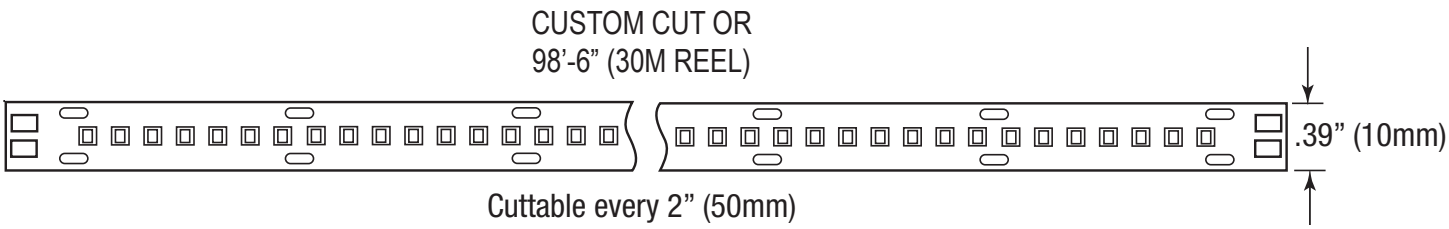

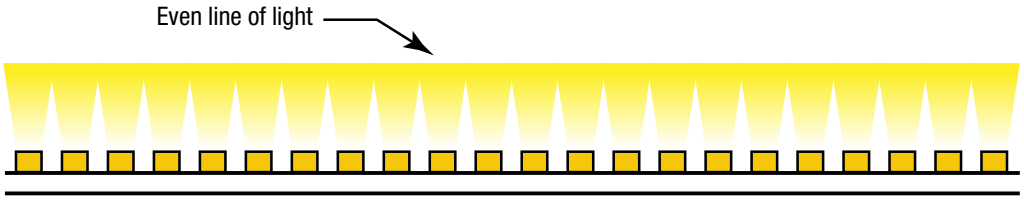

Diode-Free Imaging From High Density Placement

EST SERIES CONNECTORS

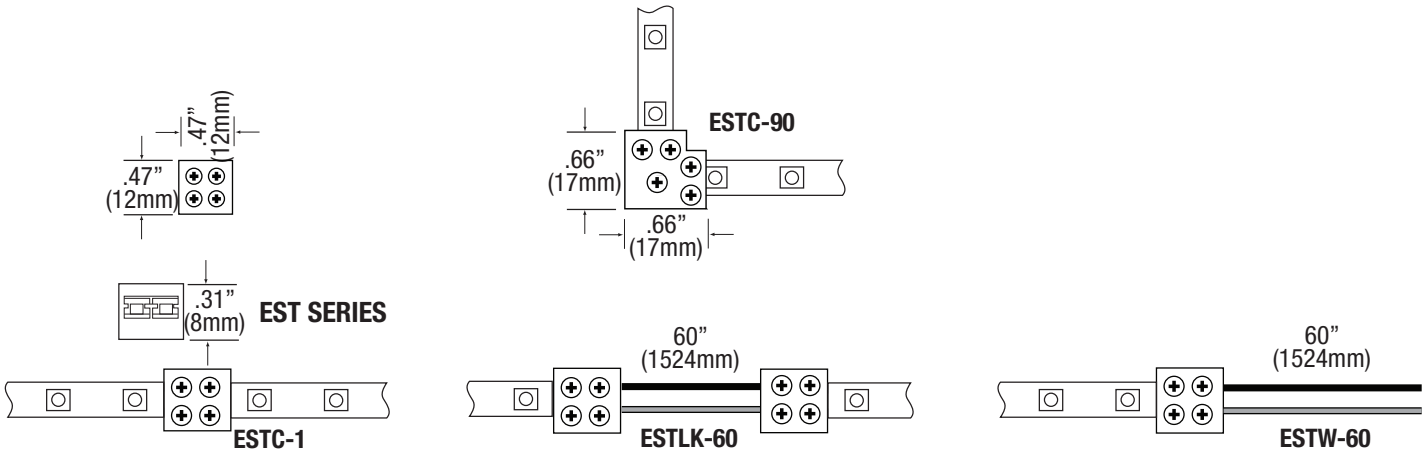

©2026 GM LIGHTING, LLC • www.gmlighting.net • Specifications subject to change without notice
18700 Ridgeland Ave., Tinley Park, IL 60477 • Toll-Free: (866) 671-0811 FAX: (708) 478-2640 • tech@gmlighting.net


LTR-S Specification Series

8W, 24VDC High Output
LED Tape Specification Sheet


GMLighting®

COMPATIBLE CHANNELS - FIT CONNECTORS ON PG. 1


EXTRA DEEP

Catalog No.	Description	Length	Dimensions
LED-CHL-XD	Extra deep format extruded channel. Includes snap-on frosted lens with mounting clips and screws.	4’	
LED-CHL-XD-6	Extra deep format extruded channel. Includes snap-on frosted lens with mounting clips and screws.	6’	
LED-CHL-XD-AMC	(2) Adjustable mounting brackets for LED-CHL-XD	N/A	
LED-CHL-XD-EC	(2) End caps for LED-CHL-XD. One solid, one with hole.	N/A	
LED-CHL-XD-MC	(2) Mounting clips and screws for LED-CHL-XD	N/A	


EXTRA DEEP FLANGED

LED-CHL-XD-F	Extra deep format extruded channel with flange. Includes snap-on frosted lens with mounting clips and screws.	4’	
LED-CHL-XD-F-6	Extra deep format extruded channel with flange. Includes snap-on frosted lens with mounting clips and screws.	6’	
LED-CHL-XD-F-DC	(2) Drywall mounting brackets for LED-CHL-XD-F	N/A	
LED-CHL-XD-F-EC	(2) End caps for LED-CHL-XD-F. One solid, one with hole.	N/A	

MINI DEEP

LED-CHL-XD-MD	Mini deep format extruded channel. Includes snap-on frosted lens with mounting clips and screws.	4’	
LED-CHL-XD-MD-WH	Mini deep format extruded channel. Includes snap-on frosted lens with mounting clips and screws. White.	4’	
LED-CHL-XD-MD-B	Mini deep format extruded channel. Includes snap-on frosted lens with mounting clips and screws. Black.	4’	
LED-CHL-XD-MD-6	Mini deep format extruded channel with flange. Includes snap-on frosted lens with mounting clips and screws.	6’	
LED-CHL-XD-MD-6-WH	Mini deep format extruded channel. Includes snap-on frosted lens with mounting clips and screws. White.	6’	
LED-CHL-XD-MD-6-B	Mini deep format extruded channel. Includes snap-on frosted lens with mounting clips and screws. Black.	6’	
LED-CHL-XD-MD-AMC	(2) Adjustable mounting brackets for LED-CHL-XD-MD	N/A	
LED-CHL-XD-MD-EC	(2) End caps for LED-CHL-XD-MD. One solid, one with hole.	N/A	
LED-CHL-XD-MD-MC	(2) Mounting clips for LED-CHL-XD-MD	N/A	

MINI DEEP FLANGED

LED-CHL-XD-MD-F	Mini deep format flanged extruded channel with flange. Includes snap-on frosted lens with mounting clips and screws.	4’	
LED-CHL-XD-MD-F-WH	Mini deep format flanged extruded channel with flange. Includes snap-on frosted lens with mounting clips and screws. White.	4’	
LED-CHL-XD-MD-F-B	Mini deep format flanged extruded channel with flange. Includes snap-on frosted lens with mounting clips and screws. Black.	4’	
LED-CHL-XD-MD-F-6	Mini deep format extruded flanged channel with flange. Includes snap-on frosted lens with mounting clips and screws.	6’	
LED-CHL-XD-MD-F-6-WH	Mini deep format extruded flanged channel with flange. Includes snap-on frosted lens with mounting clips and screws. White.	6’	
LED-CHL-XD-MD-F-6-B	Mini deep format extruded flanged channel with flange. Includes snap-on frosted lens with mounting clips and screws. Black.	6’	
LED-CHL-XD-MD-F-DC	(2) Drywall mounting brackets for LED-CHL-XD-MD-F	N/A	
LED-CHL-XD-MD-F-EC	(2) End caps for LED-CHL-XD-MD-F One solid, one with hole.	N/A	

©2026 GM LIGHTING, LLC • www.gmlighting.net • Specifications subject to change without notice
18700 Ridgeland Ave., Tinley Park, IL 60477 • Toll-Free: (866) 671-0811 FAX: (708) 478-2640 • tech@gmlighting.net


LTR-S Specification Series

8W, 24VDC High Output
LED Tape Specification Sheet


GMLighting®

COMPATIBLE CHANNELS- FIT CONNECTORS ON PG. 1


45° ANGLE MOUNT

Catalog No.	Description		Dimensions
LED-CHL-45	Extruded angled (45°) channel. Includes snap-on frosted lens with mounting clips and screws.	4’	
LED-CHL-45-EC	(2) End caps for LED-CHL-45 - one solid, one with hole	N/A	
LED-CHL-45-MC	(2) Mounting clips and screws for LED-CHL-45	N/A	


45° LARGE ANGLE MOUNT

LED-CHL-45-1200	Extruded angled (45°) channel. Includes snap-on frosted lens with mounting clips and screws.	4’	
LED-CHL-45-1200-EC	(2) End caps for LED-CHL-45 - one solid, one with hole	N/A	
LED-CHL-45-1200-MC	(2) Additional mounting clips for LED-CHL-45-1200	N/A	


WIDE

LED-CHL-W	Wide format extruded channel. Includes snap-on frosted lens with mounting clips and screws.	4’	
LED-CHL-W-6	Wide format extruded channel. Includes snap-on frosted lens with mounting clips and screws.	6’	
LED-CHL-W-AMC	(2) Adjustable mounting brackets for LED-CHL-W	N/A	
LED-CHL-W-EC	(2) End caps for LED-CHL-W - one solid, one with hole.	N/A	
LED-CHL-W-MC	(2) Additional mounting clips for LED-CHL-W	N/A	

MUD IN - STANDARD

LED-CHL-MI-ST6	Standard extruded aluminum mud-in channel. Includes snap-on frosted lens.	6’	
LED-CHL-MI-ST-EC	(2) End caps for LED-CHL-MI-ST6 one solid, one with hole.	N/A	

STANDARD STRAIGHT

LED-CHL2-4-CA	Silver channel, white lens **(2)** mounting clips, **(2)** screws	4’	
LED-CHL2-4-WH	White channel, white lens **(2)** mounting clips, **(2)** screws	4’	
LED-CHL2-4-BK	Black channel, white lens **(2)** mounting clips, **(2)** screws	4’	
LED-CHL2-6-CA	Silver channel, whilte lens, **(4)** mounting clips, **(4)** screws	6’	
LED-CHL2-6-WH	White channel, whilte lens, **(4)** mounting clips, **(4)** screws	6’	
LED-CHL2-6-BK	Black channel, whilte lens, **(4)** mounting clips, **(4)** screws	6’	
LED-CHL2 LENS-4-BK	Lens in black for LED-CHL2-4	4’	
LED-CHL2 LENS-6-BK	Lens in black for LED-CHL2-6	6’	
LED-CHL2-ECG	(2) End caps for LED-CHL2-CA: light gray, one solid, one with hole	N/A	
LED-CHL2-ECW	(2) End caps for LED-CHL2-WH: white, one solid, one with hole	N/A	
LED-CHL2-ECB	(2) End caps for LED-CHL2-BK: black, one solid, one with hole	N/A	
LED-CHL2-MC	(2) Mounting clips and (2) screws	N/A	
LED-CHL2-AMC	(2) Adjustable mounting clips and (2) screws	N/A	

©2026 GM LIGHTING, LLC • www.gmlighting.net • Specifications subject to change without notice
18700 Ridgeland Ave., Tinley Park, IL 60477 • Toll-Free: (866) 671-0811 FAX: (708) 478-2640 • tech@gmlighting.net


LTR-S Specification Series

8W, 24VDC High Output
LED Tape Specification Sheet


GMLighting®

COMPATIBLE CHANNELS - SOLDERED LEADS ONLY


STANDARD STRAIGHT

Catalog No.	Description		Dimensions
LED-CHL	Extruded channel. Includes snap-on frosted lens with mounting clips and screws.	4’	
LED-CHL-6	Extruded channel. Includes snap-on frosted lens with mounting clips and screws.	6’	
LED-CHL-AMC	(2) Adjustable mounting brackets for LED-CHL	N/A	
LED-CHL-EC	(2) End caps for LED-CHL - one solid, one with hole.	N/A	
LED-CHL-MC	(2) Additional mounting clips for LED-CHL	N/A	

45° MINI ANGLE MOUNT


LED-CHL-45-MINI	Extruded angled (45°) silver channel. Includes snap-on white lens with (2) mounting clips and (2) screws.	4'	
LED-CHL-45-MINI-B	Extruded angled (45°) black channel. Includes snap-on white lens with (2) mounting clips and (2) screws.	4'	
LED-CHL-45-MINI-EC	(2) End caps for LED-CHL-45-MINI: light gray, one solid, one with hole	N/A	
LED-CHL-45-MINI-EC-B	(2) End caps for LED-CHL-MINI-B: black, one solid, one with hole	N/A	
LED-CHL-45-MINI-MC	(2) Mounting clips and (2) screws for LED-CHL-45-MINI	N/A	
LED-CHL-45-M-LENS-BK	Lens in black for LED-CHL-45-MINI	4'	

BENDABLE


LED-CHL-BND-4	Extruded 4’ bendable channel. Inc. snap-on frosted lens with screws	4’	
LED-CHL-BND-6	Extruded 6’ bendable channel. Inc. snap-on frosted lens with screws	6’	
LED-CHL-BND-EC	(2) end caps for LED-CHL-BND 4’ or 6’	N/A	
LED-CHL-BND-MC	(2) mounting clips and screws for LED-CHL-BND 4’ or 6’	N/A	

©2026 GM LIGHTING, LLC • www.gmlighting.net • Specifications subject to change without notice
18700 Ridgeland Ave., Tinley Park, IL 60477 • Toll-Free: (866) 671-0811 FAX: (708) 478-2640 • tech@gmlighting.net

SHWC LUXCONTROL WIFI CONTROLLER

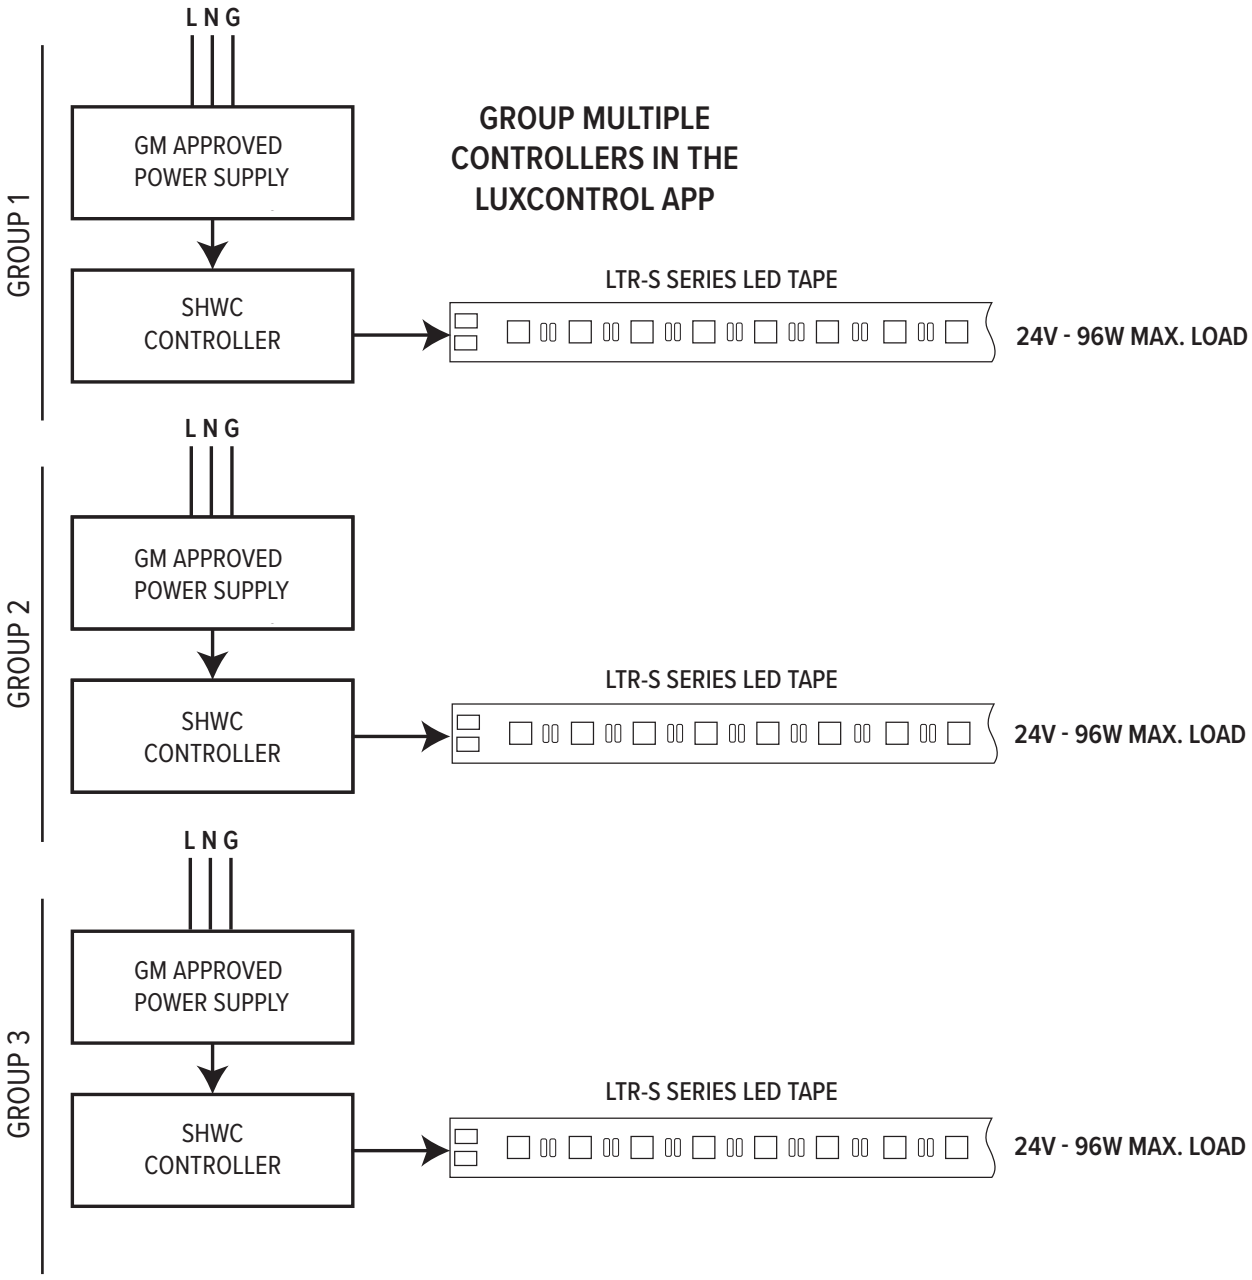


SHWC LUXCONTROL WIFI CONTROLLER WITH POWER REPEATER

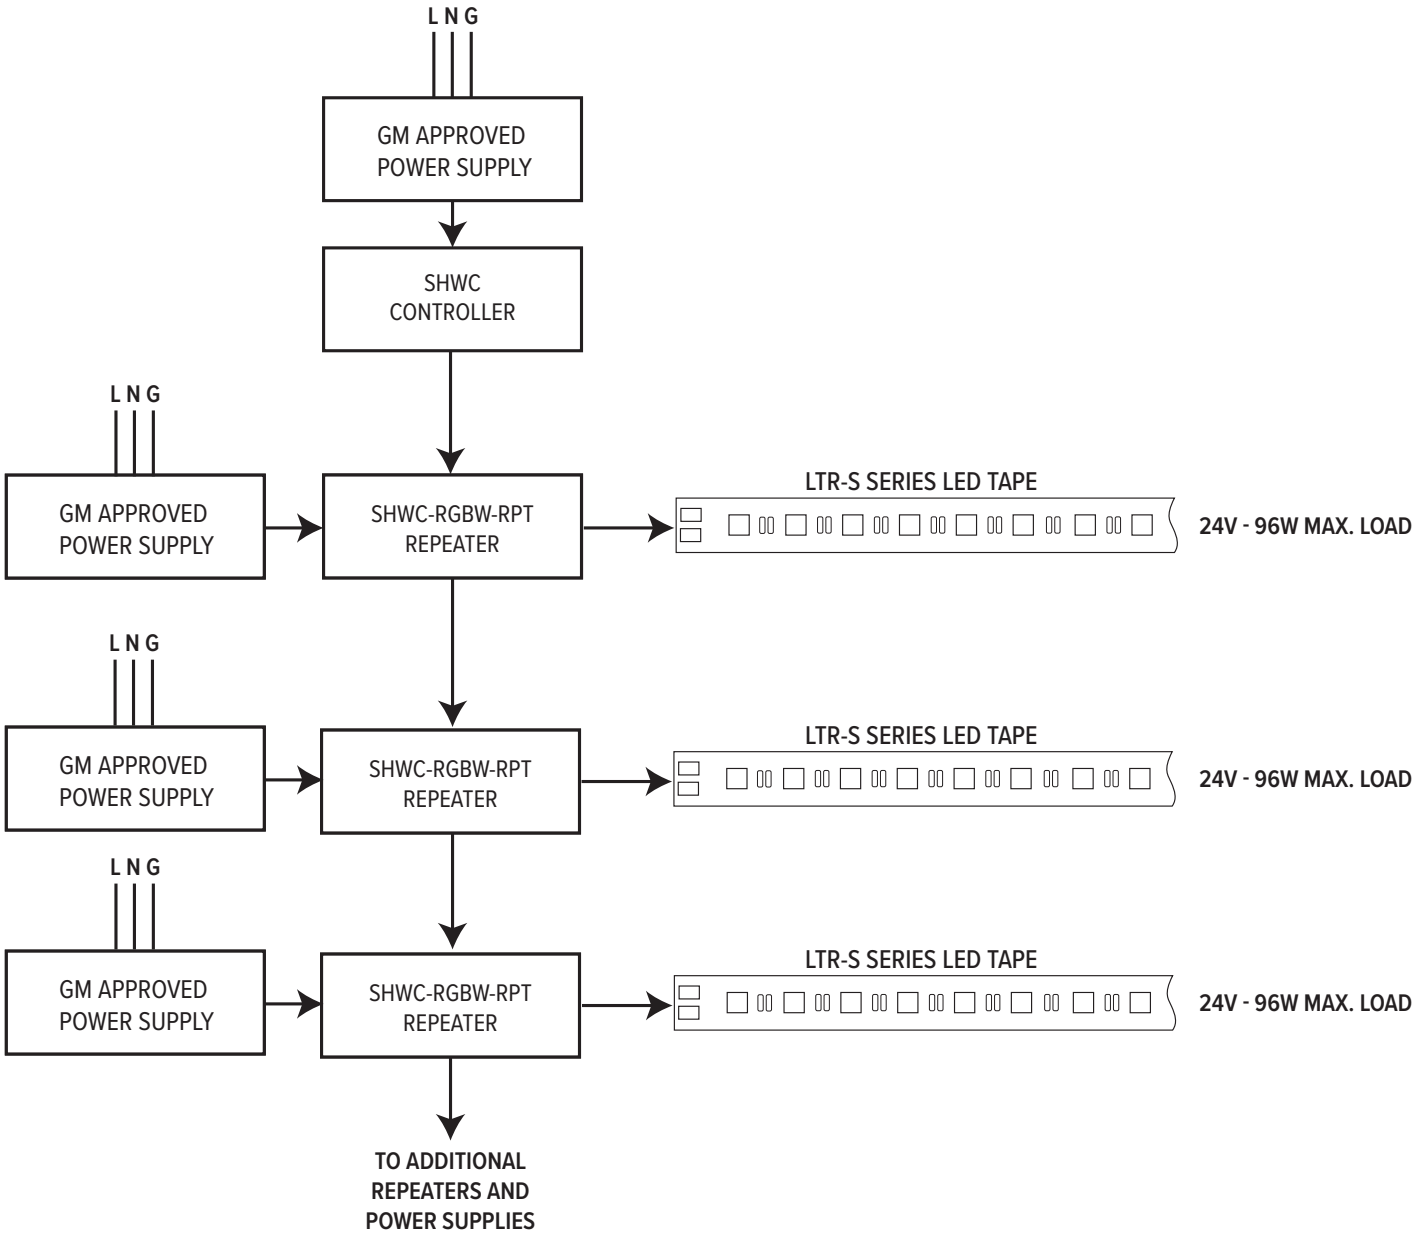


©2026 GM LIGHTING, LLC • www.gmlighting.net • Specifications subject to change without notice

18700 Ridgeland Ave., Tinley Park, IL 60477 • Toll-Free: (866) 671-0811 FAX: (708) 478-2640 • tech@gmlighting.net

SHWD LUXCONTROL WIFI DIMMER

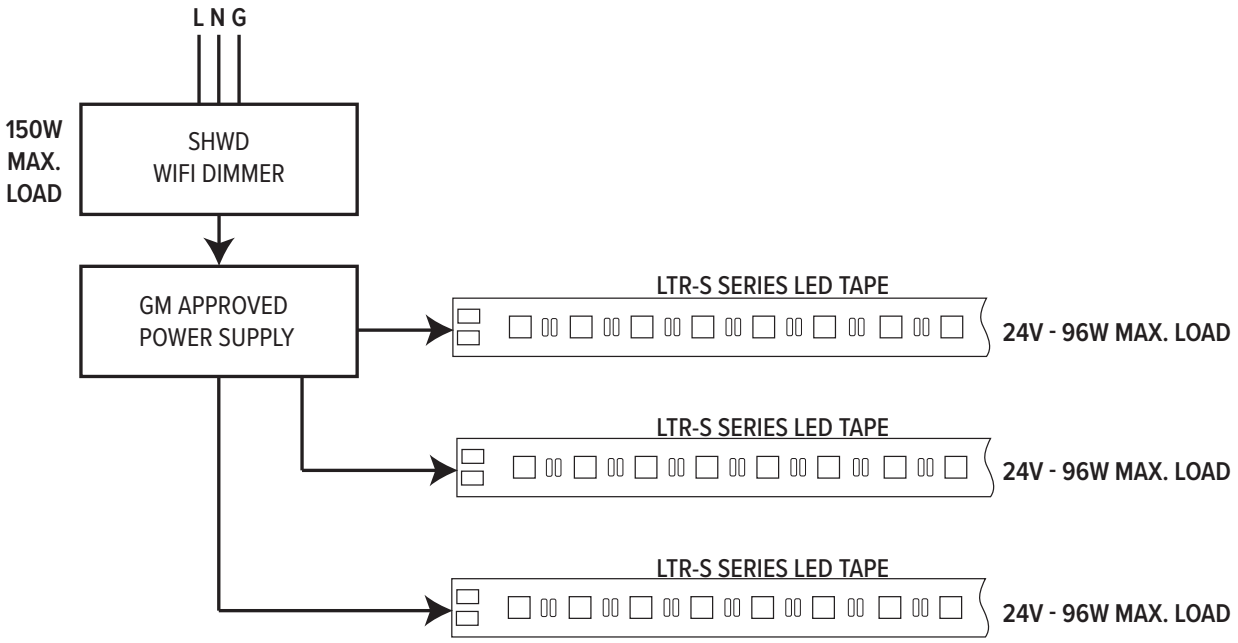

SWITCHLD SWDD DRIVER AND DIMMER

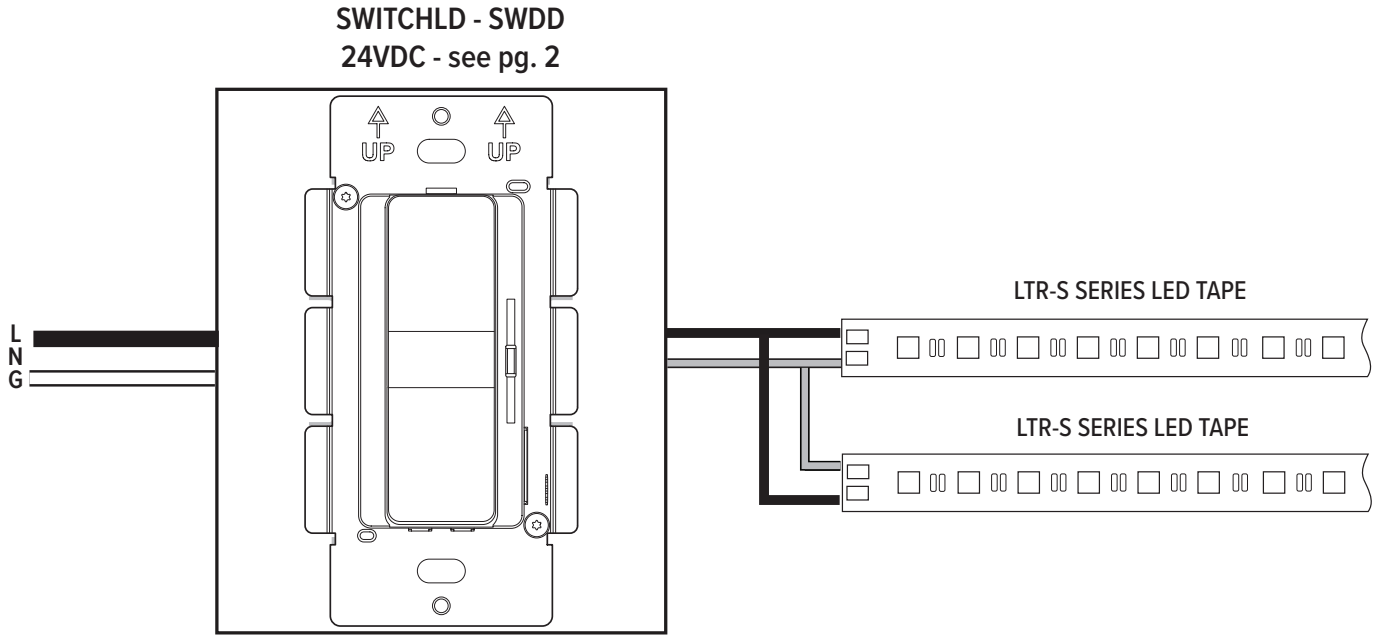

©2026 GM LIGHTING, LLC • www.gmlighting.net • Specifications subject to change without notice

18700 Ridgeland Ave., Tinley Park, IL 60477 • Toll-Free: (866) 671-0811 FAX: (708) 478-2640 • tech@gmlighting.net


LTR-S Specification Series

8W, 24VDC High Output
LED Tape Specification Sheet

GMLighting®

RF CONTROLLER

Incoming power for (L N G) options can be 120V or 277V.
Check power supply for proper input voltage and output power required.
Power Supply output voltage must match LED operating voltage. (24VDC)
Power supply used **MUST NOT BE DIMMED** at the input to properly power the controls.
See Controller instructions for pairing and wiring details.

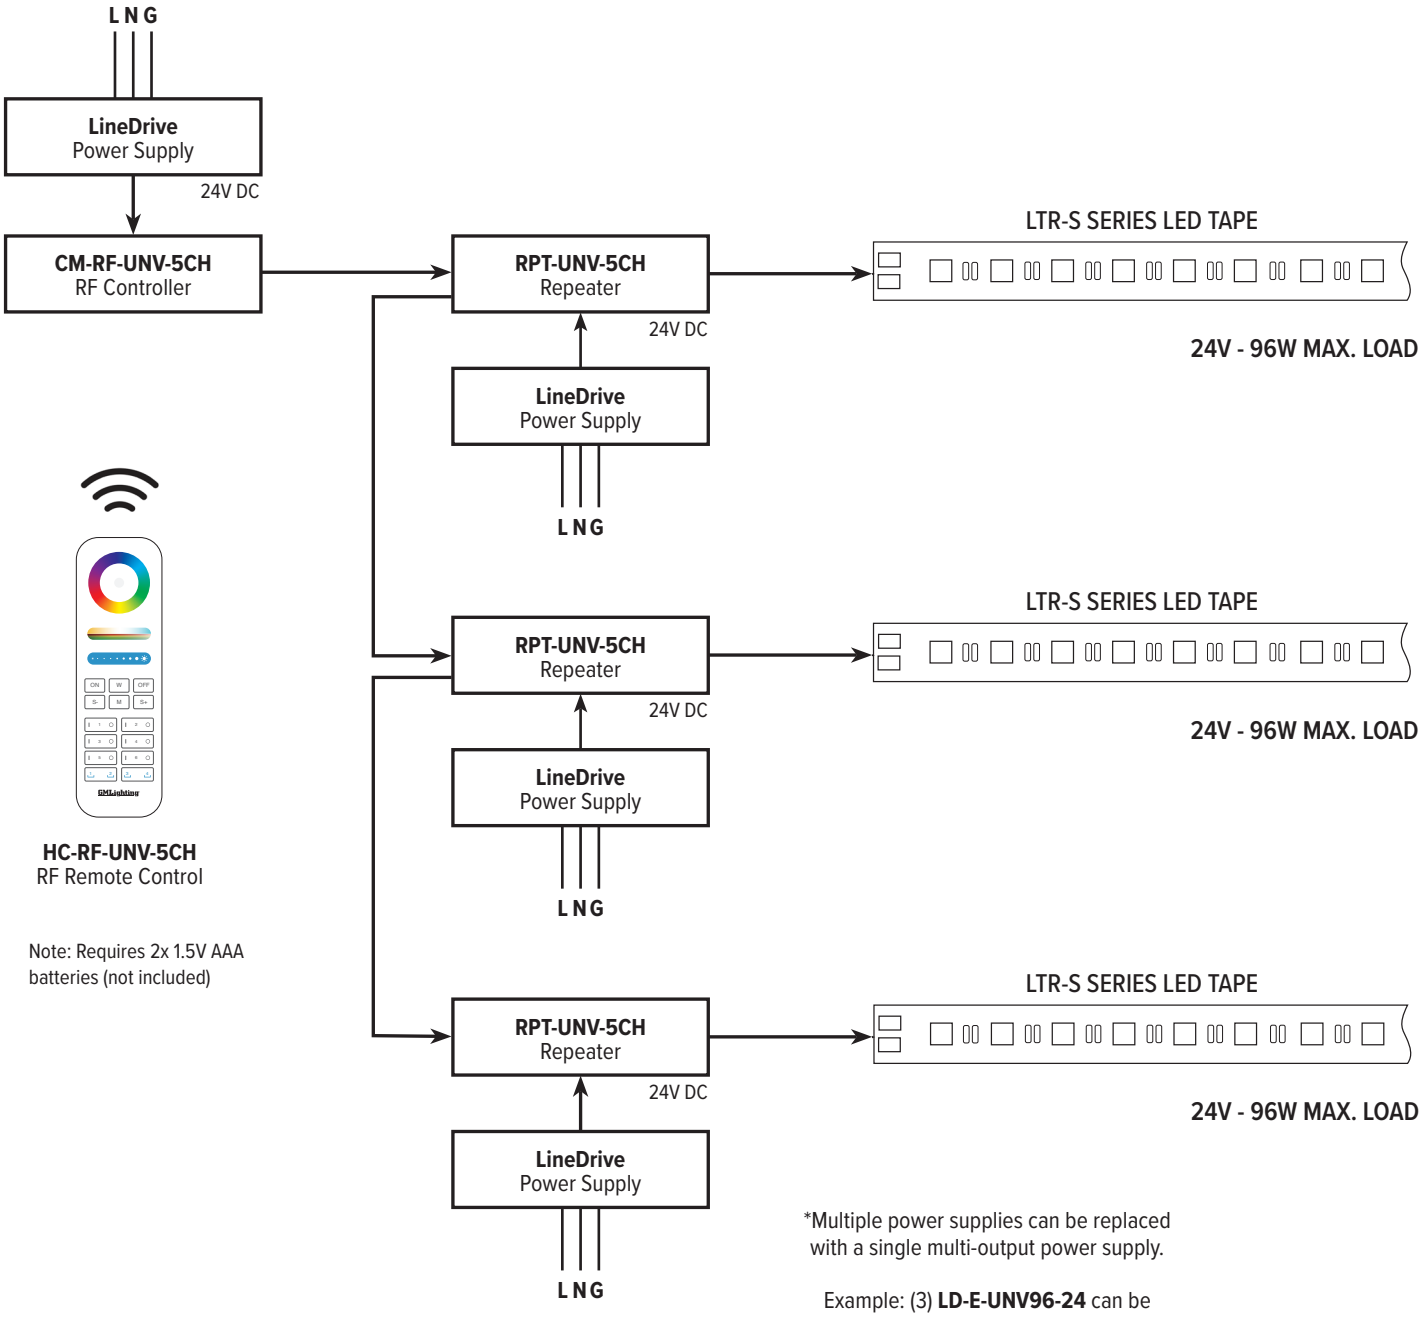

HC-RF-UNV-5CH
RF Remote Control

Note: Requires 2x 1.5V AAA batteries (not included)

*Multiple power supplies can be replaced with a single multi-output power supply.

Example: (3) **LD-E-UNV96-24** can be replaced by (1) **LD-E-UNV300-24**


©2026 GM LIGHTING, LLC • www.gmlighting.net • Specifications subject to change without notice
18700 Ridgeland Ave., Tinley Park, IL 60477 • Toll-Free: (866) 671-0811 FAX: (708) 478-2640 • tech@gmlighting.net

LTR-S Specification Series

8W, 24VDC High Output
LED Tape Specification Sheet


GMLighting®

RF REMOTE CONTROLLER AND REPEATER

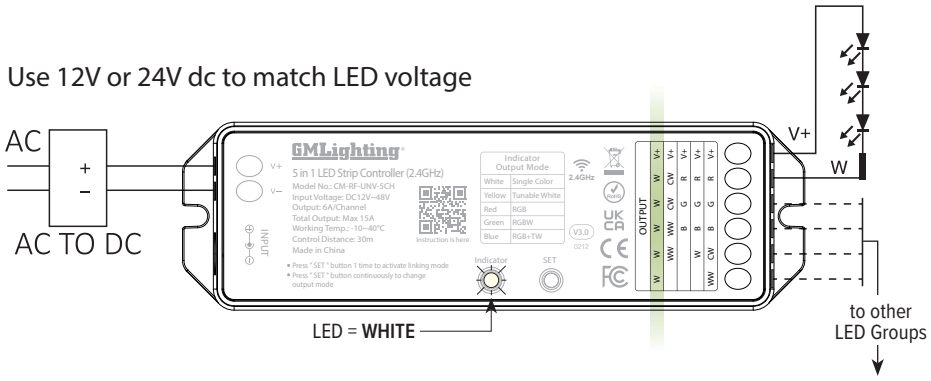



CM-RF-UNV-5CH
RF Controller

DIMENSIONS

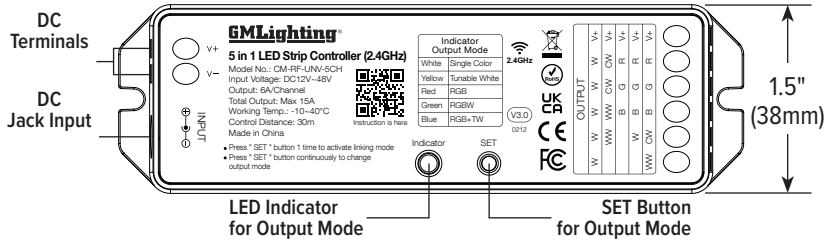

CM-RF-UNV-5CH
RF Controller

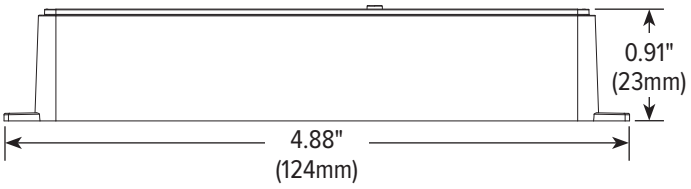

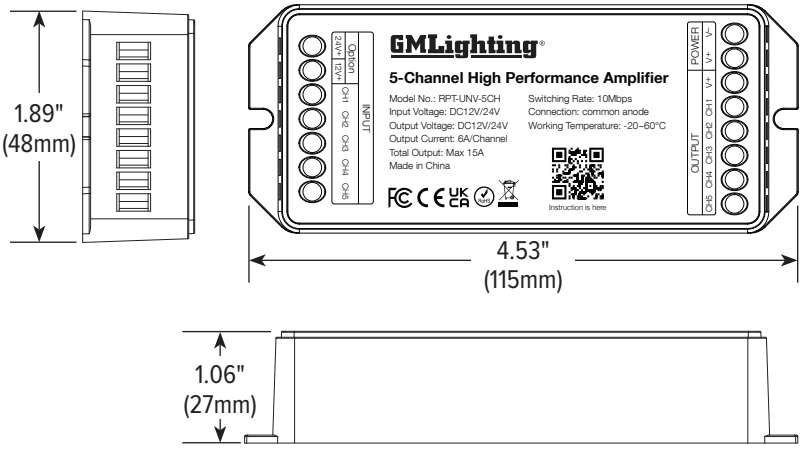

RPT-UNV-5CH
Repeater Amplifier


©2026 GM LIGHTING, LLC • www.gmlighting.net • Specifications subject to change without notice
18700 Ridgeland Ave., Tinley Park, IL 60477 • Toll-Free: (866) 671-0811 FAX: (708) 478-2640 • tech@gmlighting.net

LTR-S Specification Series

8W, 24VDC High Output
LED Tape Specification Sheet

GMLighting®

RF HAND HELD REMOTE FEATURES AND DIMENSIONS

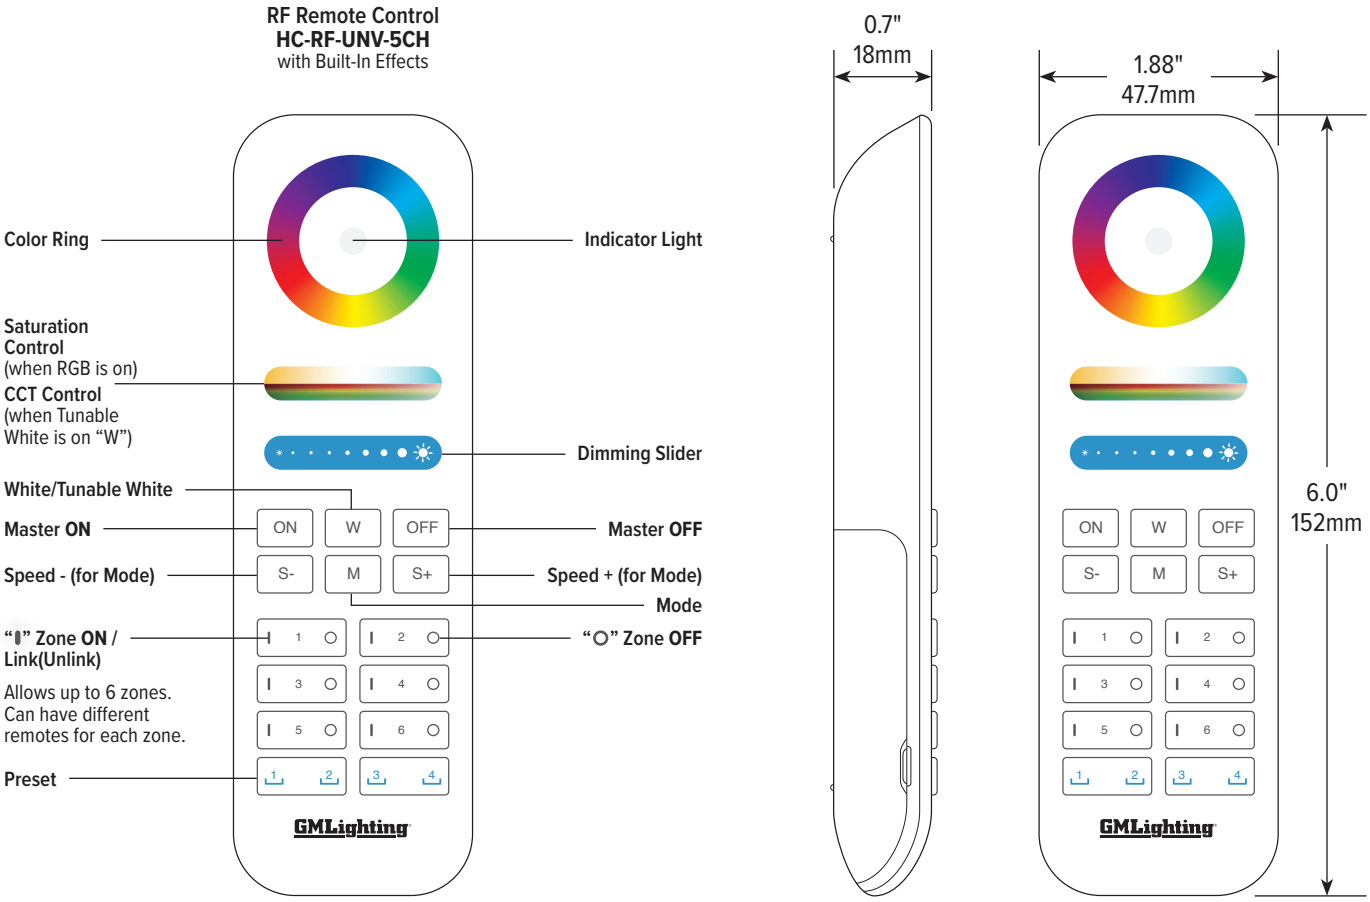

©2026 GM LIGHTING, LLC • www.gmlighting.net • Specifications subject to change without notice
18700 Ridgeland Ave., Tinley Park, IL 60477 • Toll-Free: (866) 671-0811 FAX: (708) 478-2640 • tech@gmlighting.net