

LTR-S Specification Series

12VDC Twist-Task (TW) LED Tape Specification Sheet

GMLighting®

Project Name	Type
--------------	------

Catalog #	Date
-----------	------

PRODUCT OVERVIEW

GM's Specification Series Flexible Twist-Task LED Tape features segmented construction that enables the tape itself to conform to curves, sharp angles and irregular shapes that challenge typical linear tape. Available in 16'-4" (5M) reels.

FEATURES

- 12VDC
- 2700K, 3000K, 3500K, and 4000K color temps
- Remote control with GM's LUXcontrol™ App and controllers
- LM80 / IP20
- Segmented construction
- Cuttable every 4"
- Premium 2835 diodes
- Dry location
- 120° viewing angle
- Dimmable
- 3M adhesive back
- Maximum run on a given lead is 16'-4"
- Includes Sure-Tite connectors
- Custom lengths available - consult factory

SPECIFICATIONS

ELECTRICAL

- 12V
- 2.2 watts per foot

OPTICS

- 90+ CRI

OPERATING TEMP

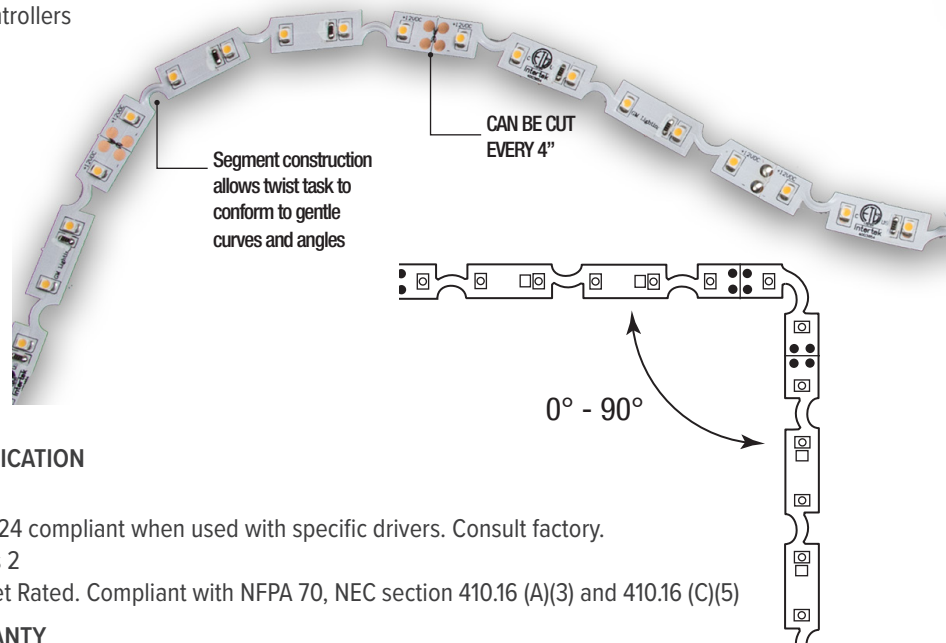
- -4°F to 122°F

CERTIFICATION

- UL
- Title 24 compliant when used with specific drivers. Consult factory.
- Class 2
- Closet Rated. Compliant with NFPA 70, NEC section 410.16 (A)(3) and 410.16 (C)(5)

WARRANTY

- 5-year warranty when paired with GM power supply.



ORDERING INFORMATION

Example: LTR-S-TW-12V-2.2W-27K-16

Model	-	Series	-	Type	-	Voltage	-	Wattage	-	Color Temp	-	Reel Length
LTR	-	S	-	TW	-	12V	-	2.2W	-	27K	-	16
										30K		
										35K		
										40K		

*Reel Length: 16 = 16'-4"

ACCESSORIES

Model	Description
ESTC-1	Sure-Tite tape to tape connector
ESTC-90	Sure-Tite 90° connector
ESTLK-60	Sure-Tite 60" adjustable tape to tape connector
ESTW-60	Sure-Tite 60" adjustable tape to power connector
ESTW-CO	Sure-Tite tape to power supply connector (no wire)

Your LED Tape Specification Checklist:

1. Select Tape
2. Select Connectors
3. Select Channels
4. Select Controllers or Dimmers
5. Select Power Supplies

Install Sheet



LTR-S Specification Series

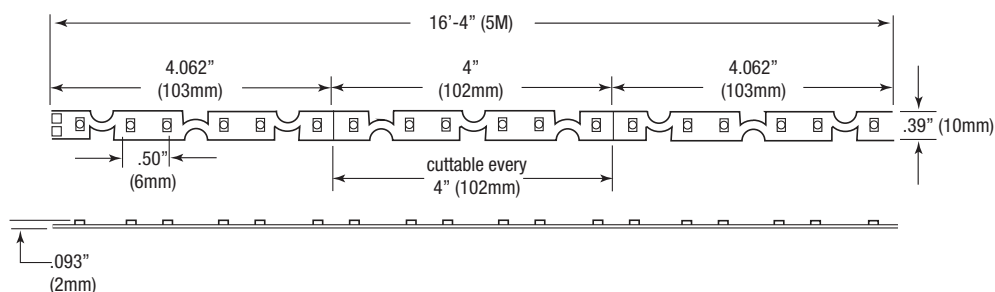
12VDC Twist-Task (TW) LED Tape Specification Sheet

GMLighting®

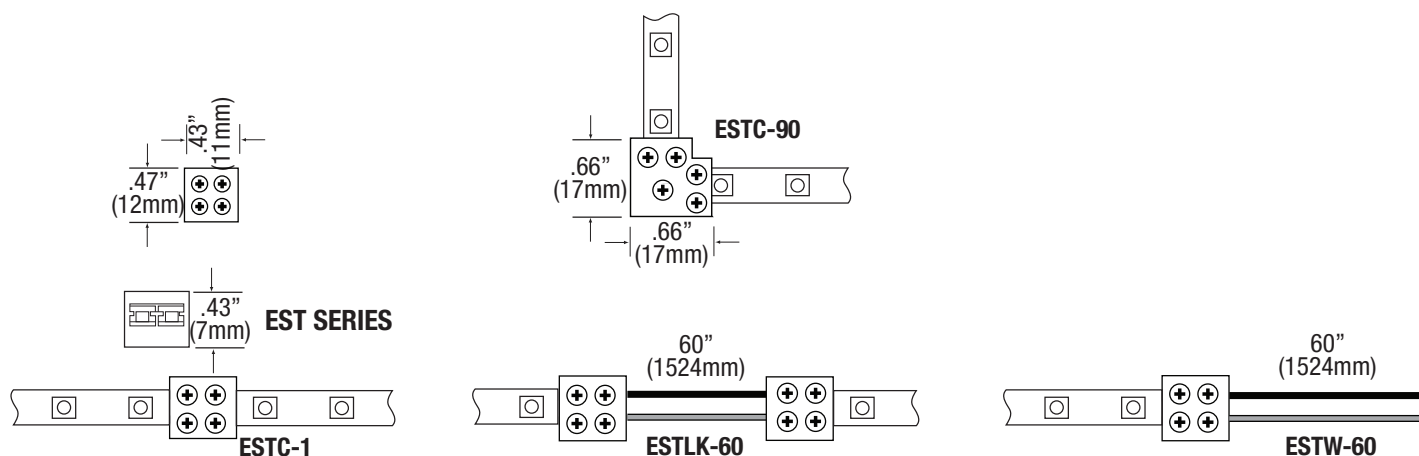
Catalog No.	Length	Lumens	CRI	Color Temp.	Max. Run
LTR-S-TW-12V-2.2W-27K-16	16'-4" / 5M	183	90+	2700K	16'-4"
LTR-S-TW-12V-2.2W-30K-16	16'-4" / 5M	192	90+	3000K	16'-4"
LTR-S-TW-12V-2.2W-35K-16	16'-4" / 5M	199	90+	3500K	16'-4"
LTR-S-TW-12V-2.2W-40K-16	16'-4" / 5M	201	90+	4000K	16'-4"

Kelvin temperature (color) $\pm 100K$. Note: Includes 48" lead affixed to tape and (3) ESTW-60 Sure-Tite connectors.

DIMENSION



EST SERIES CONNECTORS



LTR-S Specification Series

12VDC Twist-Task (TW) LED Tape Specification Sheet



COMPATIBLE CONTROLLERS

Model	Description
SHWC	LUXcontrol Smart 2.4 GHz WiFi Controller, Standard 12V/24V Low Voltage
SHWD	LUXcontrol Smart 2.4 GHz WiFi Dimmer, Standard 12V/24V Low Voltage
SWD-40W-12VDC-DIM	SwitchLD All-in-One Dimmer and Driver, 40W, 24VDC
SWD-60W-12VDC-DIM	SwitchLD All-in-One Dimmer and Driver, 60W, 24VDC
HC-RF-UNV-5CH	Universal 1-5 Channel RF Remote Control
CM-RF-UNV-5CH	Universal 1-5 Channel Control Module
RPT-UNV-5CH	Universal 1-5 Channel Repeater Amplifier

RECOMMENDED DRIVERS

Catalog No.	Description	Watts	Specification Sheet
LD-XD-UNV	LineDrive Electronic Multi-Dimmable Power Supply, 12VDC or 24VDC	20W, 40W, 60W, 96W, 180W, 200W, 300W	View Spec Sheet
LD-E-UNV	LineDrive Electronic Non-Dimmable Power Supply, 12VDC or 24VDC	30W, 60W, 96W, 200W, 300W	View Spec Sheet
LD-MD-UNV	LineDrive Magnetic Dimmable Power Supply, 12VDC or 24VDC	30W, 60W, 96W, 150W, 200W, 300W	View Spec Sheet
LD-EDM	LineDrive Electronic Dimmable MINI Power Supply, 12VDC or 24VDC	60W	View Spec Sheet
LTP	Cord and Plug Power Supply, 12VDC or 24VDC	25W, 48W, 60W, 90W	View Spec Sheet
PSD	Electronic Dimmable Power Supply, 12VDC or 24VDC	15W, 24W, 60W, 90W	View Spec Sheet
Please see our website for updated power supply specifications and information.			


LTR-S Specification Series

12VDC Twist-Task (TW) LED Tape Specification Sheet


GM Lighting®

COMPATIBLE CHANNELS - FIT CONNECTORS ON PG. 1


EXTRA DEEP

Catalog No.	Description	Length	Dimensions
LED-CHL-XD	Extra deep format extruded channel. Includes snap-on frosted lens with mounting clips and screws.	4'	
LED-CHL-XD-6	Extra deep format extruded channel. Includes snap-on frosted lens with mounting clips and screws.	6'	
LED-CHL-XD-AMC	(2) Adjustable mounting brackets for LED-CHL-XD	N/A	
LED-CHL-XD-EC	(2) End caps for LED-CHL-XD. One solid, one with hole.	N/A	
LED-CHL-XD-MC	(2) Mounting clips and screws for LED-CHL-XD	N/A	


EXTRA DEEP FLANGED

LED-CHL-XD-F	Extra deep format extruded channel with flange. Includes snap-on frosted lens with mounting clips and screws.	4'	
LED-CHL-XD-F-6	Extra deep format extruded channel with flange. Includes snap-on frosted lens with mounting clips and screws.	6'	
LED-CHL-XD-F-DC	(2) Drywall mounting brackets for LED-CHL-XD-F	N/A	
LED-CHL-XD-F-EC	(2) End caps for LED-CHL-XD-F. One solid, one with hole.	N/A	

MINI DEEP

LED-CHL-XD-MD	Mini deep format extruded channel. Includes snap-on frosted lens with mounting clips and screws.	4'	
LED-CHL-XD-MD-WH	Mini deep format extruded channel. Includes snap-on frosted lens with mounting clips and screws. White.	4'	
LED-CHL-XD-MD-B	Mini deep format extruded channel. Includes snap-on frosted lens with mounting clips and screws. Black.	4'	
LED-CHL-XD-MD-6	Mini deep format extruded channel with flange. Includes snap-on frosted lens with mounting clips and screws.	6'	
LED-CHL-XD-MD-6-WH	Mini deep format extruded channel. Includes snap-on frosted lens with mounting clips and screws. White.	6'	
LED-CHL-XD-MD-6-B	Mini deep format extruded channel. Includes snap-on frosted lens with mounting clips and screws. Black.	6'	
LED-CHL-XD-MD-AMC	(2) Adjustable mounting brackets for LED-CHL-XD-MD	N/A	
LED-CHL-XD-MD-EC	(2) End caps for LED-CHL-XD-MD. One solid, one with hole.	N/A	
LED-CHL-XD-MD-MC	(2) Mounting clips for LED-CHL-XD-MD	N/A	

MINI DEEP FLANGED

LED-CHL-XD-MD-F	Mini deep format flanged extruded channel with flange. Includes snap-on frosted lens with mounting clips and screws.	4'	
LED-CHL-XD-MD-F-WH	Mini deep format flanged extruded channel with flange. Includes snap-on frosted lens with mounting clips and screws. White.	4'	
LED-CHL-XD-MD-F-B	Mini deep format flanged extruded channel with flange. Includes snap-on frosted lens with mounting clips and screws. Black.	4'	
LED-CHL-XD-MD-F-6	Mini deep format extruded flanged channel with flange. Includes snap-on frosted lens with mounting clips and screws.	6'	
LED-CHL-XD-MD-F-6-WH	Mini deep format extruded flanged channel with flange. Includes snap-on frosted lens with mounting clips and screws. White.	6'	
LED-CHL-XD-MD-F-6-B	Mini deep format extruded flanged channel with flange. Includes snap-on frosted lens with mounting clips and screws. Black.	6'	
LED-CHL-XD-MD-F-DC	(2) Drywall mounting brackets for LED-CHL-XD-MD-F	N/A	
LED-CHL-XD-MD-F-EC	(2) End caps for LED-CHL-XD-MD-F. One solid, one with hole.	N/A	

LTR-S Specification Series


12VDC Twist-Task (TW)

LED Tape Specification Sheet


GM Lighting®

COMPATIBLE CHANNELS- FIT CONNECTORS ON PG. 1


45° ANGLE MOUNT

Catalog No.	Description		Dimensions
LED-CHL-45	Extruded angled (45°) channel. Includes snap-on frosted lens with mounting clips and screws.	4'	
LED-CHL-45-EC	(2) End caps for LED-CHL-45 - one solid, one with hole	N/A	
LED-CHL-45-MC	(2) Mounting clips and screws for LED-CHL-45	N/A	


45° LARGE ANGLE MOUNT

LED-CHL-45-1200	Extruded angled (45°) channel. Includes snap-on frosted lens with mounting clips and screws.	4'	
LED-CHL-45-1200-EC	(2) End caps for LED-CHL-45 - one solid, one with hole	N/A	
LED-CHL-45-1200-MC	(2) Additional mounting clips for LED-CHL-45-1200	N/A	


WIDE

LED-CHL-W	Wide format extruded channel. Includes snap-on frosted lens with mounting clips and screws.	4'	
LED-CHL-W-6	Wide format extruded channel. Includes snap-on frosted lens with mounting clips and screws.	6'	
LED-CHL-W-AMC	(2) Adjustable mounting brackets for LED-CHL-W	N/A	
LED-CHL-W-EC	(2) End caps for LED-CHL-W - one solid, one with hole.	N/A	
LED-CHL-W-MC	(2) Additional mounting clips for LED-CHL-W	N/A	

MUD IN - STANDARD

LED-CHL-MI-ST6	Standard extruded aluminum mud-in channel. Includes snap-on frosted lens.	6'	
LED-CHL-MI-ST-EC	(2) End caps for LED-CHL-MI-ST6 one solid, one with hole.	N/A	

STANDARD STRAIGHT

LED-CHL2-4-CA	Silver channel, white lens (2) mounting clips, (2) screws	4'	
LED-CHL2-4-WH	White channel, white lens (2) mounting clips, (2) screws	4'	
LED-CHL2-4-BK	Black channel, white lens (2) mounting clips, (2) screws	4'	
LED-CHL2-6-CA	Silver channel, white lens, (4) mounting clips, (4) screws	6'	
LED-CHL2-6-WH	White channel, white lens, (4) mounting clips, (4) screws	6'	
LED-CHL2-6-BK	Black channel, white lens, (4) mounting clips, (4) screws	6'	
LED-CHL2 LENS-4-BK	Lens in black for LED-CHL2-4	4'	
LED-CHL2 LENS-6-BK	Lens in black for LED-CHL2-6	6'	
LED-CHL2-ECG	(2) End caps for LED-CHL2-CA: light gray, one solid, one with hole	N/A	
LED-CHL2-ECW	(2) End caps for LED-CHL2-WH: white, one solid, one with hole	N/A	
LED-CHL2-ECB	(2) End caps for LED-CHL2-BK: black, one solid, one with hole	N/A	
LED-CHL2-MC	(2) Mounting clips and (2) screws	N/A	
LED-CHL2-AMC	(2) Adjustable mounting clips and (2) screws	N/A	


LTR-S Specification Series

12VDC Twist-Task (TW) LED Tape Specification Sheet




COMPATIBLE CHANNELS - SOLDERED LEADS ONLY

STANDARD STRAIGHT

Catalog No.	Description		Dimensions
LED-CHL	Extruded channel. Includes snap-on frosted lens with mounting clips and screws.	4'	
LED-CHL-6	Extruded channel. Includes snap-on frosted lens with mounting clips and screws.	6'	
LED-CHL-AMC	(2) Adjustable mounting brackets for LED-CHL	N/A	
LED-CHL-EC	(2) End caps for LED-CHL - one solid, one with hole.	N/A	
LED-CHL-MC	(2) Additional mounting clips for LED-CHL	N/A	

45° MINI ANGLE MOUNT

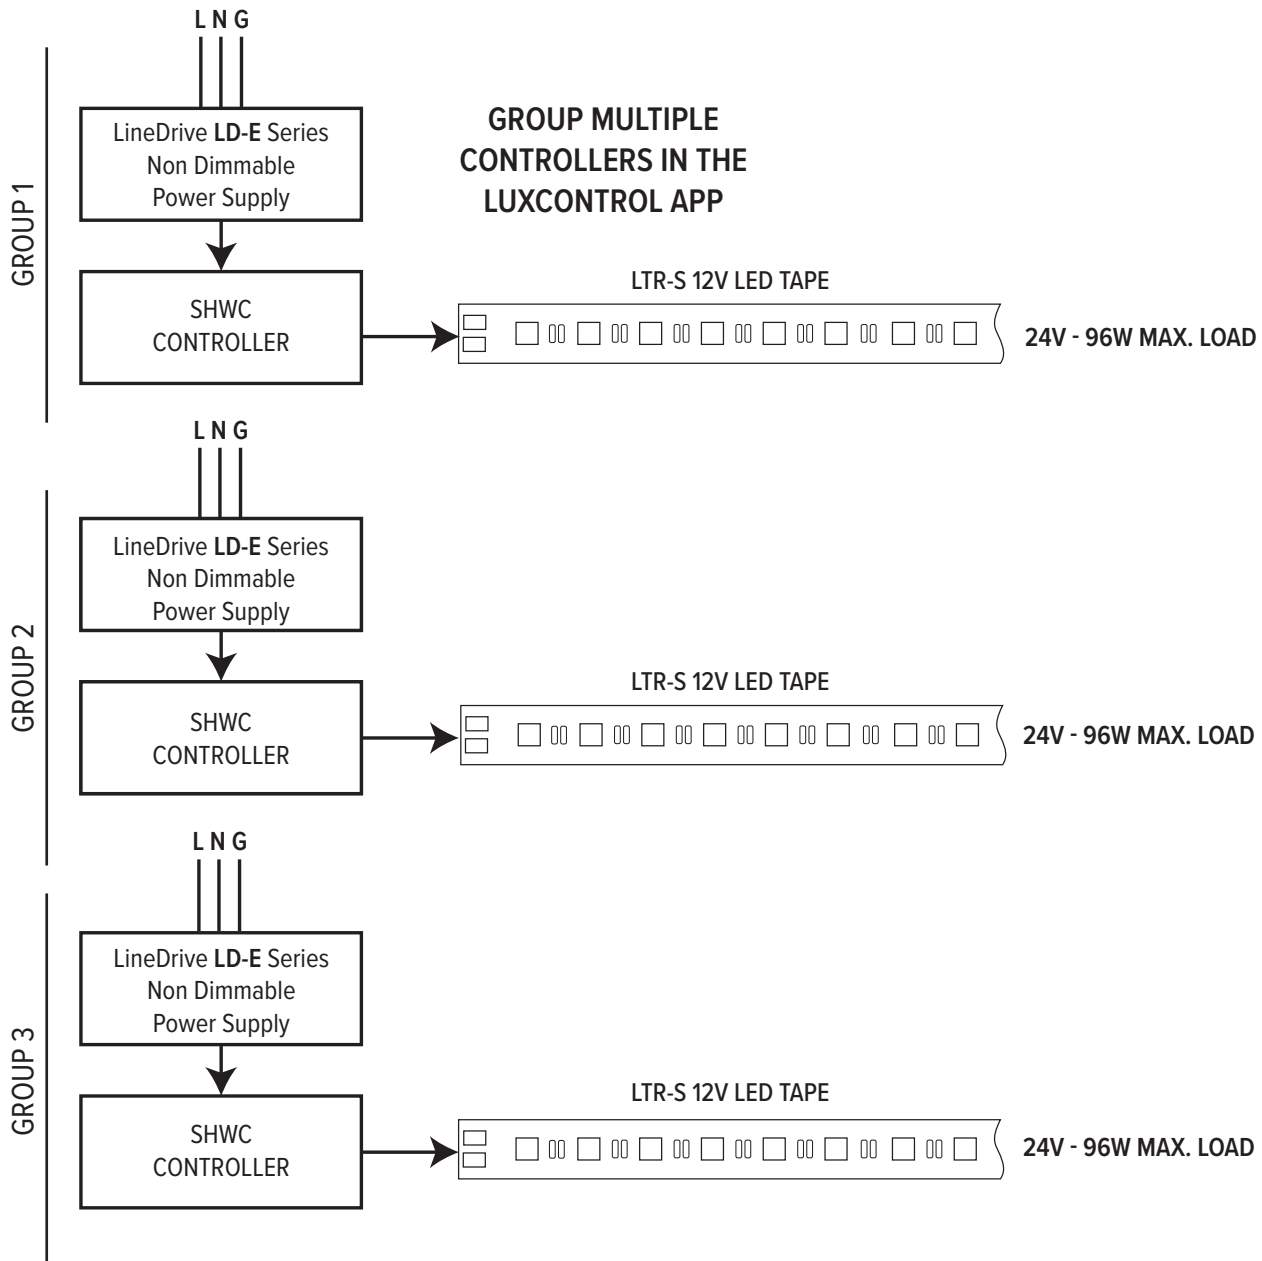
LED-CHL-45-MINI	Extruded angled (45°) silver channel. Includes snap-on white lens with (2) mounting clips and (2) screws.	4'	
LED-CHL-45-MINI-B	Extruded angled (45°) black channel. Includes snap-on white lens with (2) mounting clips and (2) screws.	4'	
LED-CHL-45-MINI-EC	(2) End caps for LED-CHL-45-MINI: light gray, one solid, one with hole	N/A	
LED-CHL-45-MINI-EC-B	(2) End caps for LED-CHL-MINI-B: black, one solid, one with hole	N/A	
LED-CHL-45-MINI-MC	(2) Mounting clips and (2) screws for LED-CHL-45-MINI	N/A	
LED-CHL-45-M-LENS-BK	Lens in black for LED-CHL-45-MINI	4'	

LTR-S Specification Series

12VDC Twist-Task (TW) LED Tape Specification Sheet



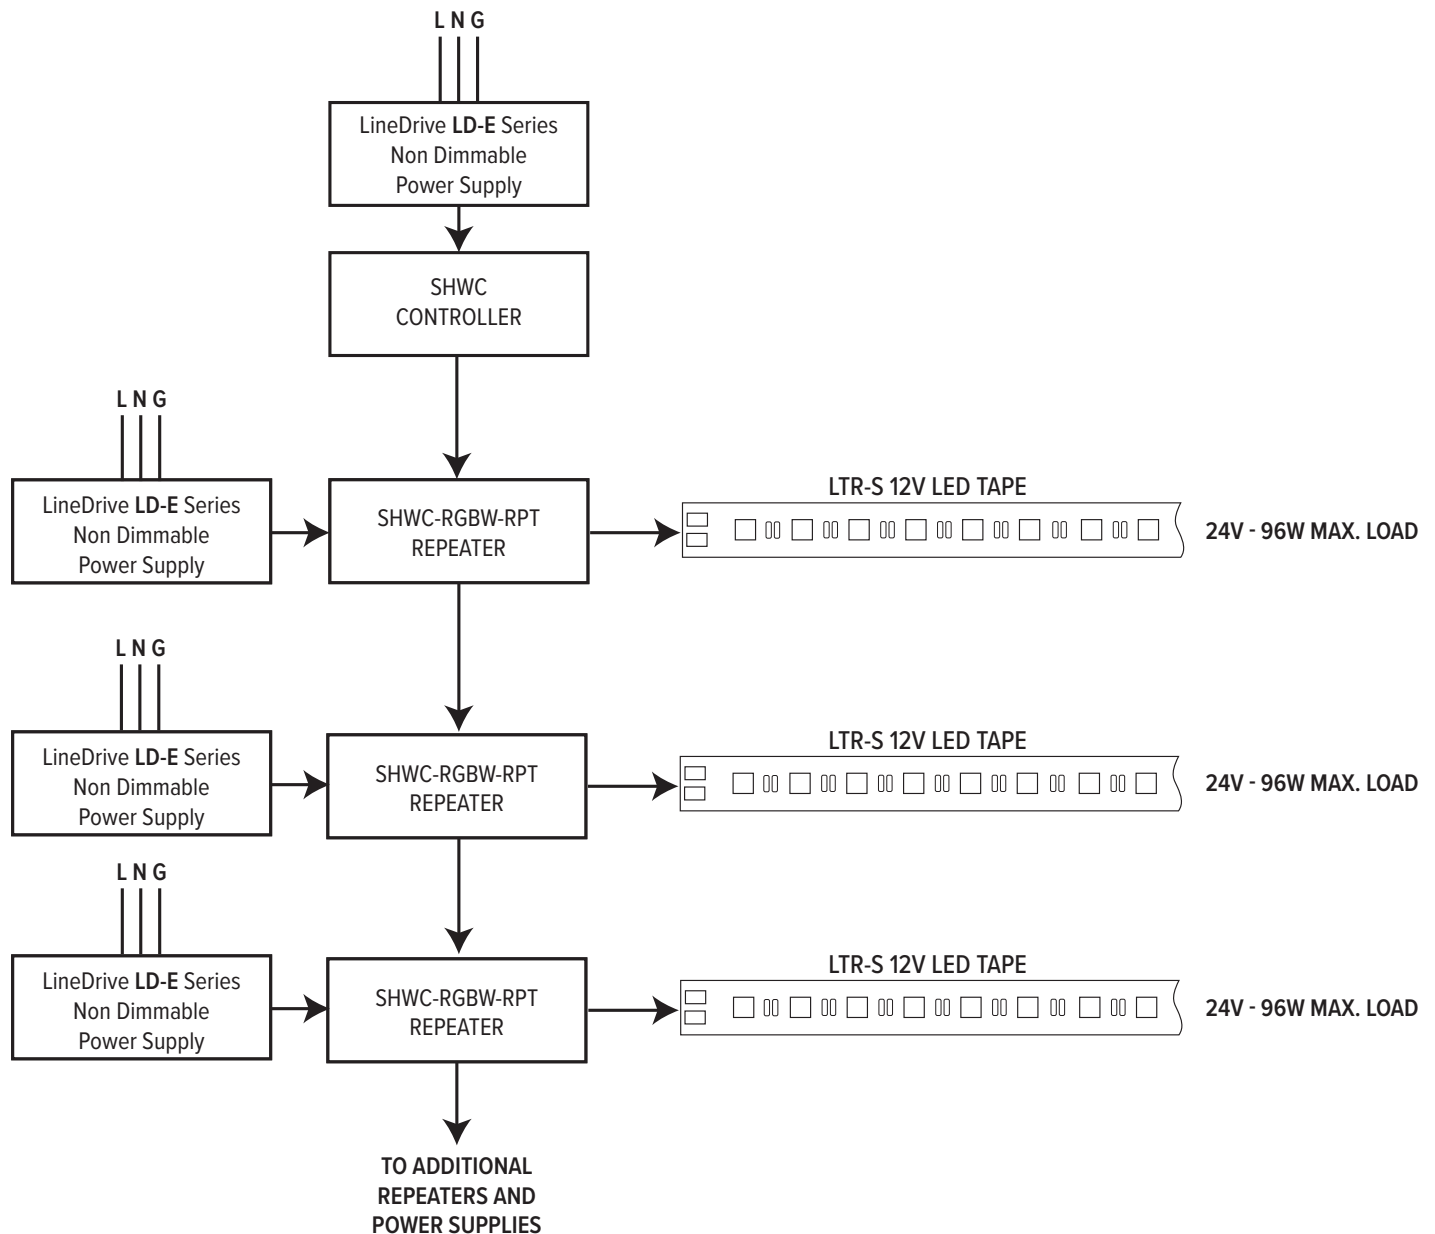
SHWC LUXCONTROL WIFI CONTROLLER



LTR-S Specification Series

12VDC Twist-Task (TW) LED Tape Specification Sheet

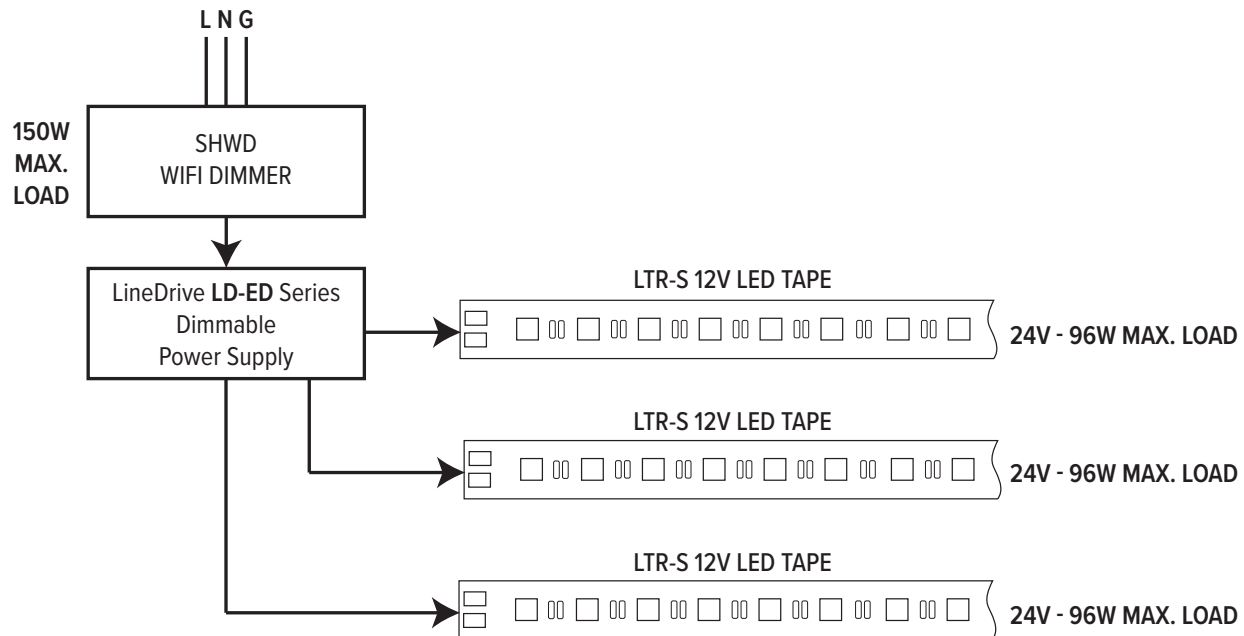
SHWC LUXCONTROL WIFI CONTROLLER WITH POWER REPEATER



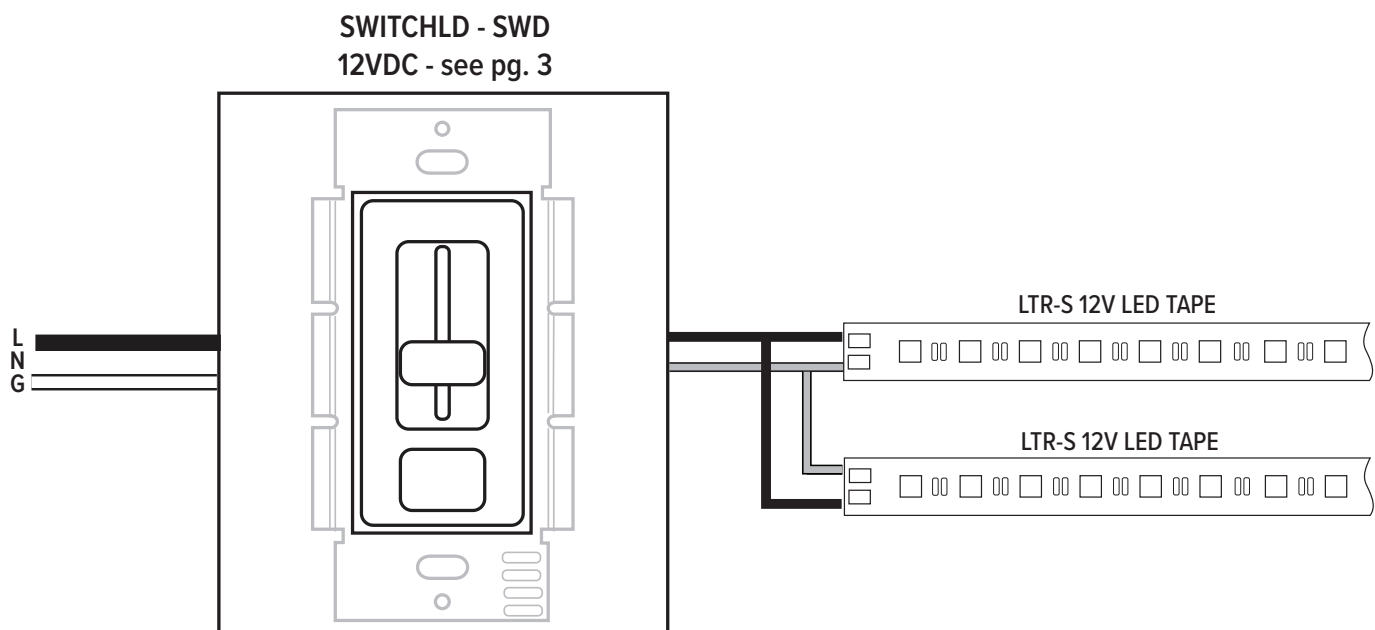
LTR-S Specification Series

12VDC Twist-Task (TW) LED Tape Specification Sheet

SHWD LUXCONTROL WIFI DIMMER



SWITCHLD SWD DRIVER AND DIMMER



LTR-S Specification Series

12VDC Twist-Task (TW) LED Tape Specification Sheet

GMLighting®

RF CONTROLLER

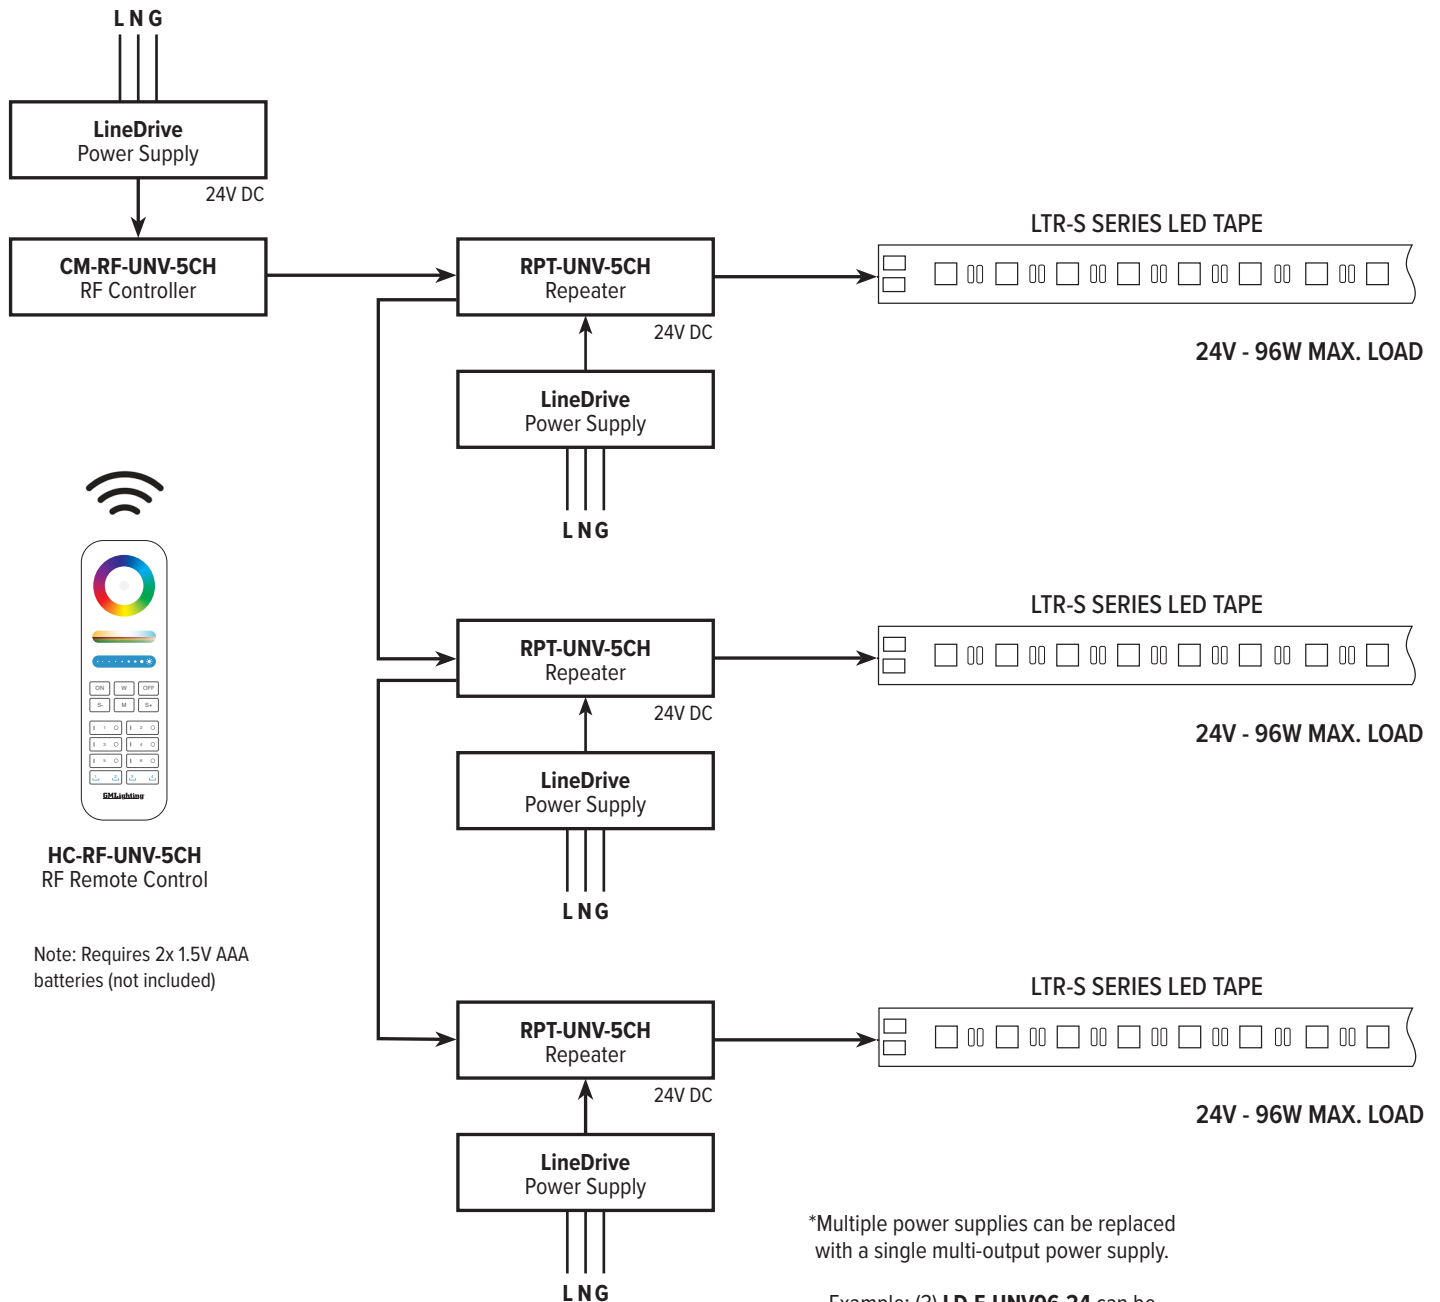
Incoming power for (L N G) options can be 120V or 277V.

Check power supply for proper input voltage and output power required.

Power Supply output voltage must match LED operating voltage. (24VDC)

Power supply used **MUST NOT BE DIMMED** at the input to properly power the controls.

See Controller instructions for pairing and wiring details.




*Multiple power supplies can be replaced with a single multi-output power supply.

Example: (3) **LD-E-UNV96-24** can be replaced by (1) **LD-E-UNV300-24**

12VDC Twist-Task (TW) LED Tape Specification Sheet

RF REMOTE CONTROLLER AND REPEATER



AC

+

-

AC TO DC



DC Terminals

DC Jack Input

5 in 1 LED Strip Controller (2.4GHz)

Model No.: CM-RF-UNV-5CH
 Input Voltage: DC12V~48V
 Output: 5VxChannel
 Total Output: Max 15A
 Working Temp.: -10~40°C
 Control Distance: 30m
 Made in China

Indicator Output Mode

White	Single Color
Yellow	Forable White
Green	RGBW
Blue	RGB+TW

2.4GHz

CE

UK

RoHS

OUTPUT

W	W	R	W
W	W	G	W
W	B	R	W
W	B	G	R
W	W	B	G
W	W	B	R

LED Indicator for Output Mode

SET Button for Output Mode

4.88" (124mm)

0.91" (23mm)

CM-RF-UNV-5CH
RF Controller



LTR-S Specification Series

12VDC Twist-Task (TW) LED Tape Specification Sheet

GMLighting®

RF HAND HELD REMOTE FEATURES AND DIMENSIONS

