

Lamina RGBW

24VDC Configurable Laminated Sheet

PRODUCT OVERVIEW

Lamina RGBW is a 24VDC flexible light sheet that can be cut in the field into geometric or irregular shapes, creating limitless illumination for signage, light panels, retail display, back lighting and themed lighting applications. Easy installation with no heat sink required. Standard 12" x 12" sheets make it easy to plan your layout and install (see next page).

FEATURES

- RGBW (with 3000K white light)
- 90+ CRI
- Dimmable
- Connectible via integral push-in connectors
- 3M Double-sided tape for mounting
- 3M tape, staple or screw mounting options
- For indoor use only
- Tight diode to diode spacing for even illumination and no hot spots
- New convenient size 12x12in = 1 Sq. Ft
- Invisible Stand-Off support option allows even illumination with translucent panels (easily raises diffusion translucent panels 0.91" - 2.0" above Lamina. For horizontal surface use only).
- Not intended for outdoor use
- Operating temp. -4°F - 122°F*

SPECIFICATIONS

ELECTRICAL

- 11.5W / Sq.Ft.
- 24VDC
- PCB zones

LABEL

- ETL
- IP20

OPTICS

- 5050 RGBW SMD
- 144 LEDs with 1" spacing
- 90+ CRI
- 3000K white light (420lm)

WARRANTY

- 5-years

ORDERING INFORMATION

Example: S12X12-RGBW


	-	
Series	-	Color Temp.
S12X12-RGBW		RGBW (3000K WHITE CHANNEL)

CONNECTORS

Catalog No.	Description
S12X12-RGBW-SSC	Sheet to Sheet Wire Connector

GMLighting®

Project Name	Type
Catalog #	Date

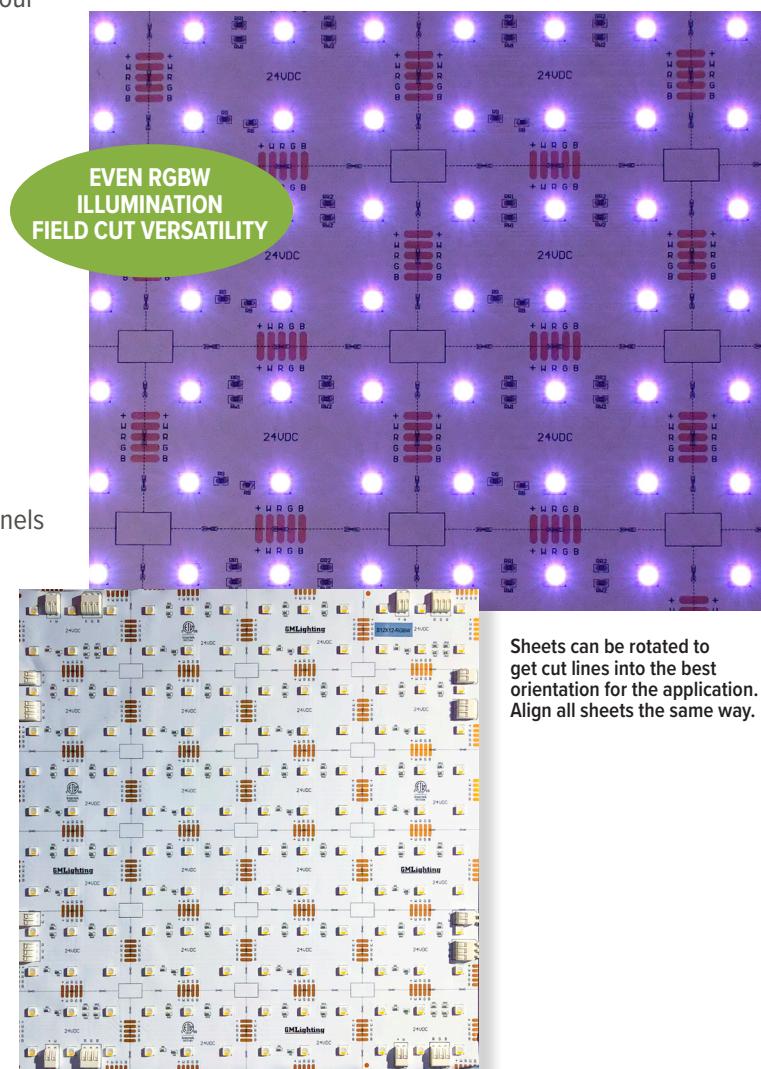

Your Lamina Specification Checklist:

1. Select Sheets
2. Select Connectors
3. Select Channels
4. Select Controllers
5. Select Power Supplies

INSTALL SHEET



SCAN ME

Catalog No.	Output	Dimension	Wattage	Lumens	CRI
S12X12	RGBW	12" x 12"	11.5W / Sq. Ft.	420lm White Light	90+ (White Only)

STAND-OFF ACCESSORIES

Model	Description	Diameter	Height Range	Max. Load	Recommended Screw Size (not included)
GM-SOC-1	Clear, Acrylic w/clear 3M tape	13mm (0.62")	23mm (0.91") to 33mm (1.30")	6 lbs.	#6 x 3/4" Pan Head Sheet Metal Screw
GM-SOC-2	Clear, Acrylic w/clear 3M tape	19mm (0.75")	36mm (1.42") to 51mm (2.00")	10 lbs.	#8 x 3/4" Pan Head Sheet Metal Screw

Note: Stand-offs come in sets of 4

COMPATIBLE CONTROLLERS

Model	Description
SHWC-RGBW	LUXcontrol Smart 2.4 GHz WiFi Controller, Standard 12V/24V Low Voltage, RGBW, 4-Channel / 5-Wire
SHWC-RGBW-RPT	LUXcontrol Universal Smart Power Repeater
DMX-LT-995	5-Channel DMX Decoder
RGBW-DMX-WC	DMX Wall Controller
HC-RF-UNV-5CH	Universal 1-5 Channel RF Remote Control
RPT-UNV-5CH	Universal 1-5 Channel Repeater Amplifier
CM-RF-UNV-5CH	Universal 1-5 Channel Control Module

RECOMMENDED DRIVERS

Catalog No.	Description	Watts	Weight	Dimensions
LD-E-UNV30	12VDC / 24VDC - 30W - 120V or 277V - 50/60Hz 12V/2.5A - 24V/1.25A - Class 2 Auto reset.	30W	1.0 lbs.	6.10" L x 3.35" W x 1.33" H
LD-E-UNV60	12VDC / 24VDC - 60W - 120V or 277V - 50/60Hz 12V/5A - 24V/2.5A - Class 2 Auto reset.	60W	2.5 lbs.	8.25" L x 4.10" W x 1.56" H
LD-E-UNV96-24	24VDC - 96W - 120V or 277V - 50/60Hz - 4 amps Class 2 - Auto reset.	96W	2.5 lbs.	8.25" L x 4.10" W x 1.56" H
LD-E-UNV200-24	24VDC - 192W - 120V or 277V - 50/60Hz - 4 amps per channel (2) Class 2 - Auto reset. 2 X 96W channel.	192W	4.7 lbs.	9.50" L x 6.35" W x 1.56" H
LD-E-UNV300-24	24VDC - 288W - 120V or 277V - 50/60Hz - 4 amps per channel (3) Class 2 - Auto reset. 3 X 96W channel.	288W	4.7 lbs.	9.50" L x 6.35" W x 1.56" H

Please see our website for updated power supply specifications and information.

CORD & PLUG DRIVERS



Catalog No.	Description	Watts	Weight	Dimensions
LTP24-48	24VDC - 48W - 2 amps - 120V - 120V Cord (72") and plug. Short circuit, overload protection - LED indicator for power on. UL listed	48W	1.8 lbs.	4.68" L x 2.05" W x 1.25" H
LTP24-90	24VDC - 90W - 3.75 amps - 120V - 120V Cord (72") and plug. Short circuit, overload protection - LED indicator for power on. UL listed	90W	1.8 lbs.	4.68" L x 2.05" W x 1.25" H

Please see our website for updated power supply specifications and information.

LAMINA DIAGRAM

Installation:
Attach stand-off to Lamina board on center with rectangles. Use adhesive disc or #6 screw (by others). Space out as needed to distribute weight of translucent sheet evenly.

CAUTION:
Stand-offs are to be used on top of horizontal surfaces only. Not for vertical wall or ceiling applications.

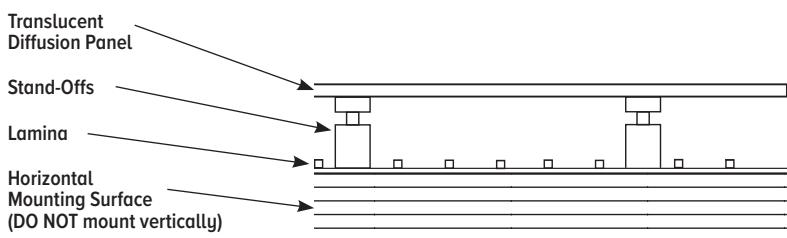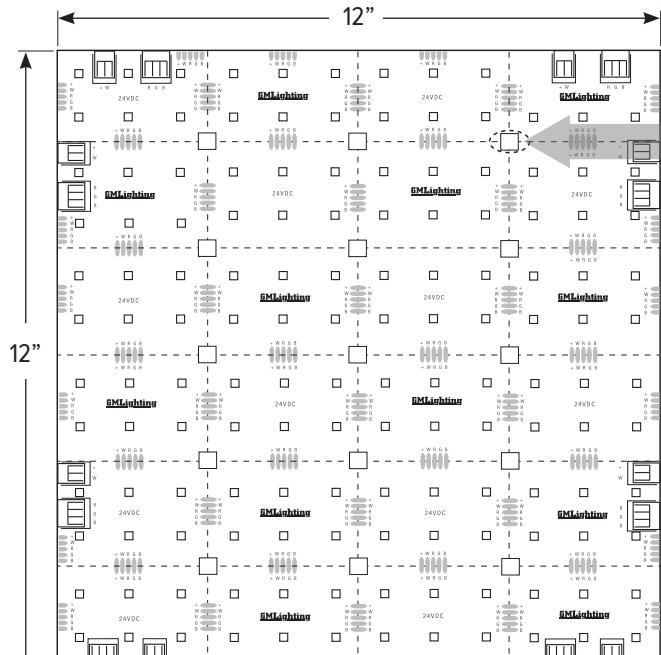

Stand-Off Application

Translucent Sheet

Adjust height by rotating top

Option to apply adhesive disc here to bottom


Minimum radius of one-directional bends is 6". Using a tighter bend will damage product



Create light pillars, illuminated table columns or whatever your imagination can conjure up!

2" Cut Lines
(shown in vertical format direction)


Tight diode to diode spacing for even illumination and no hot spots.



3" Cut Lines
(shown in horizontal format direction)

NOTE: Even illumination will vary depending on materials, please verify offset for even illumination.

MULTIPLE PANEL CONNECTION DIAGRAM

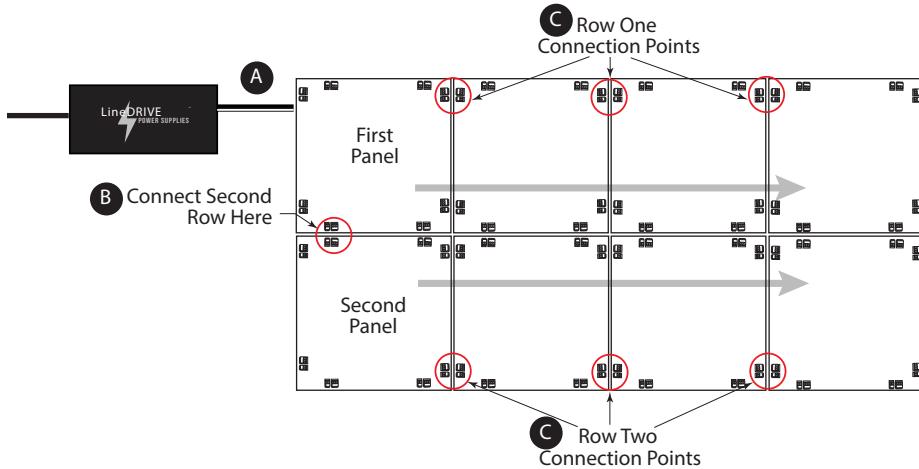

Row One

Layout & Wiring Tips (See example):

- Connect power to First Panel (1) in group.
- Connect panel in Row Two, making connection between bottom of First Panel and top of First Panel in Row Two.
- Connect additional panels in each row as you see in the diagram. Remaining panels are connected in one direction only.

Row Two




Many other layouts can be created for different shapes depending on panel cuts and position.

Lamina RGBW

24VDC Configurable Laminated Sheet

GMLighting®







SHWC-RGBW LUXCONTROL WIFI CONTROLLER

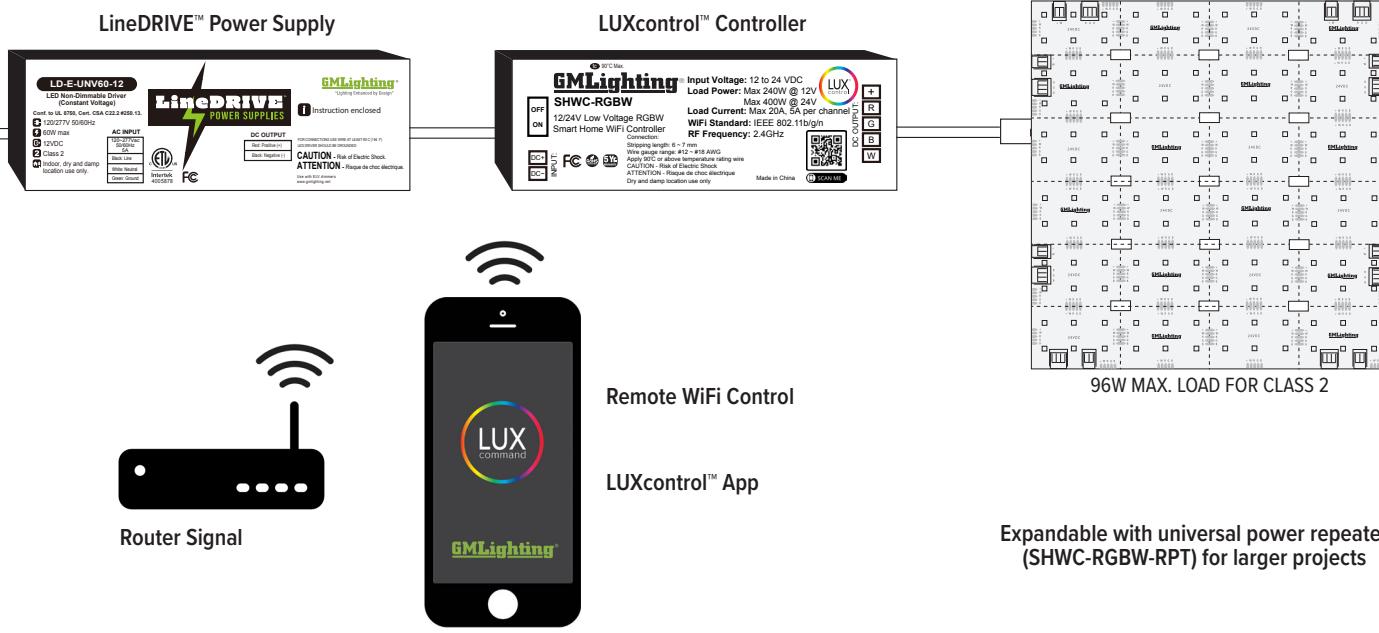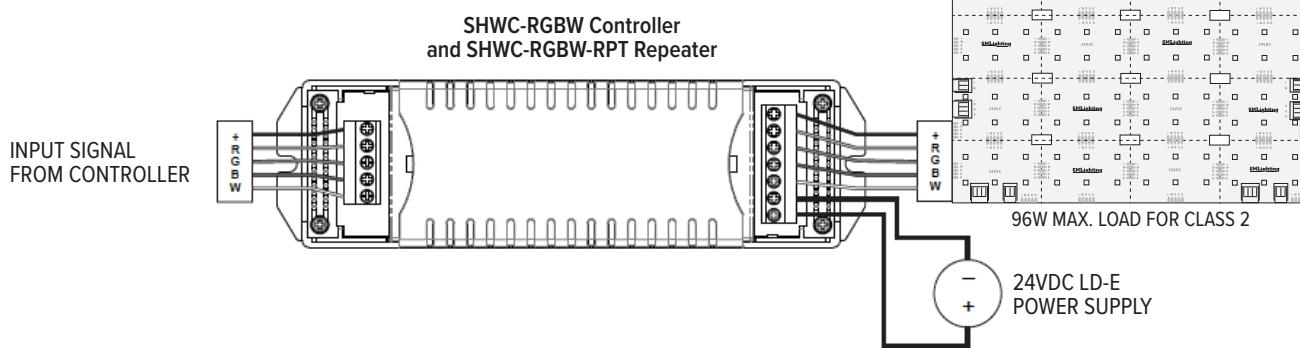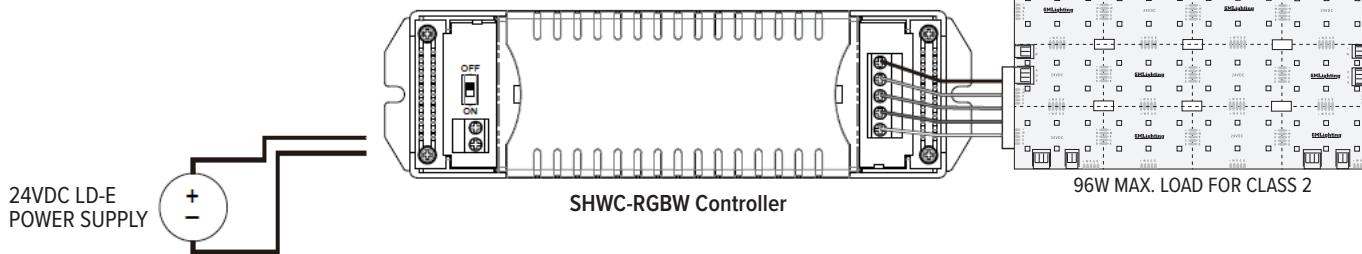

Note: For use with LD-E (non-dimmable) or LD-ED (dimmable) power supply only. Not compatible with LD-MD (magnetic) power supply.


SHWC-RGBW LUXCONTROL WIFI CONTROLLER WIRING DIAGRAM

**GROUP MULTIPLE
CONTROLLERS IN THE
LUXCONTROL APP**

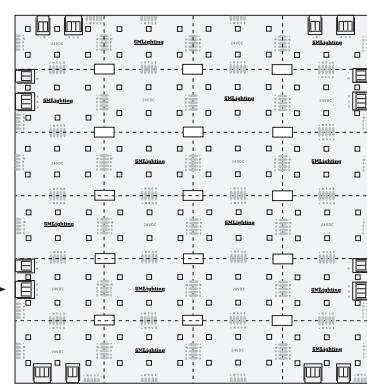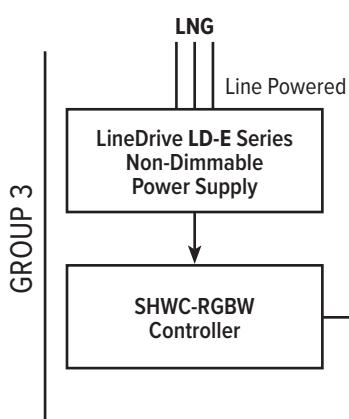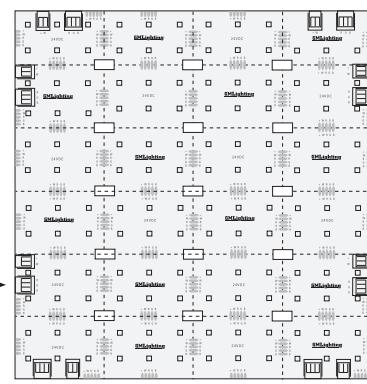
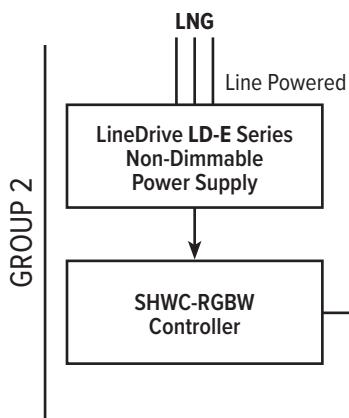
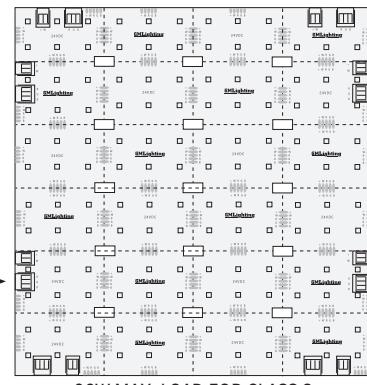
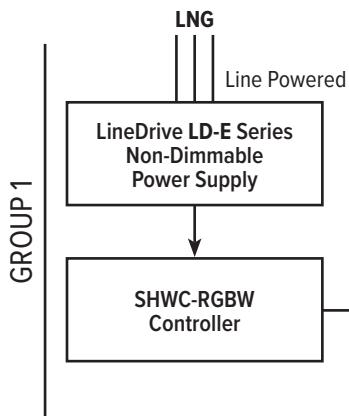


SHWC-RGBW LUXCONTROL WIFI CONTROLLER WITH POWER REPEATER WIRING DIAGRAM


THIS CONFIGURATION WILL
SHOW UP AS ONE GROUP IN
THE LUXCONTROL APP

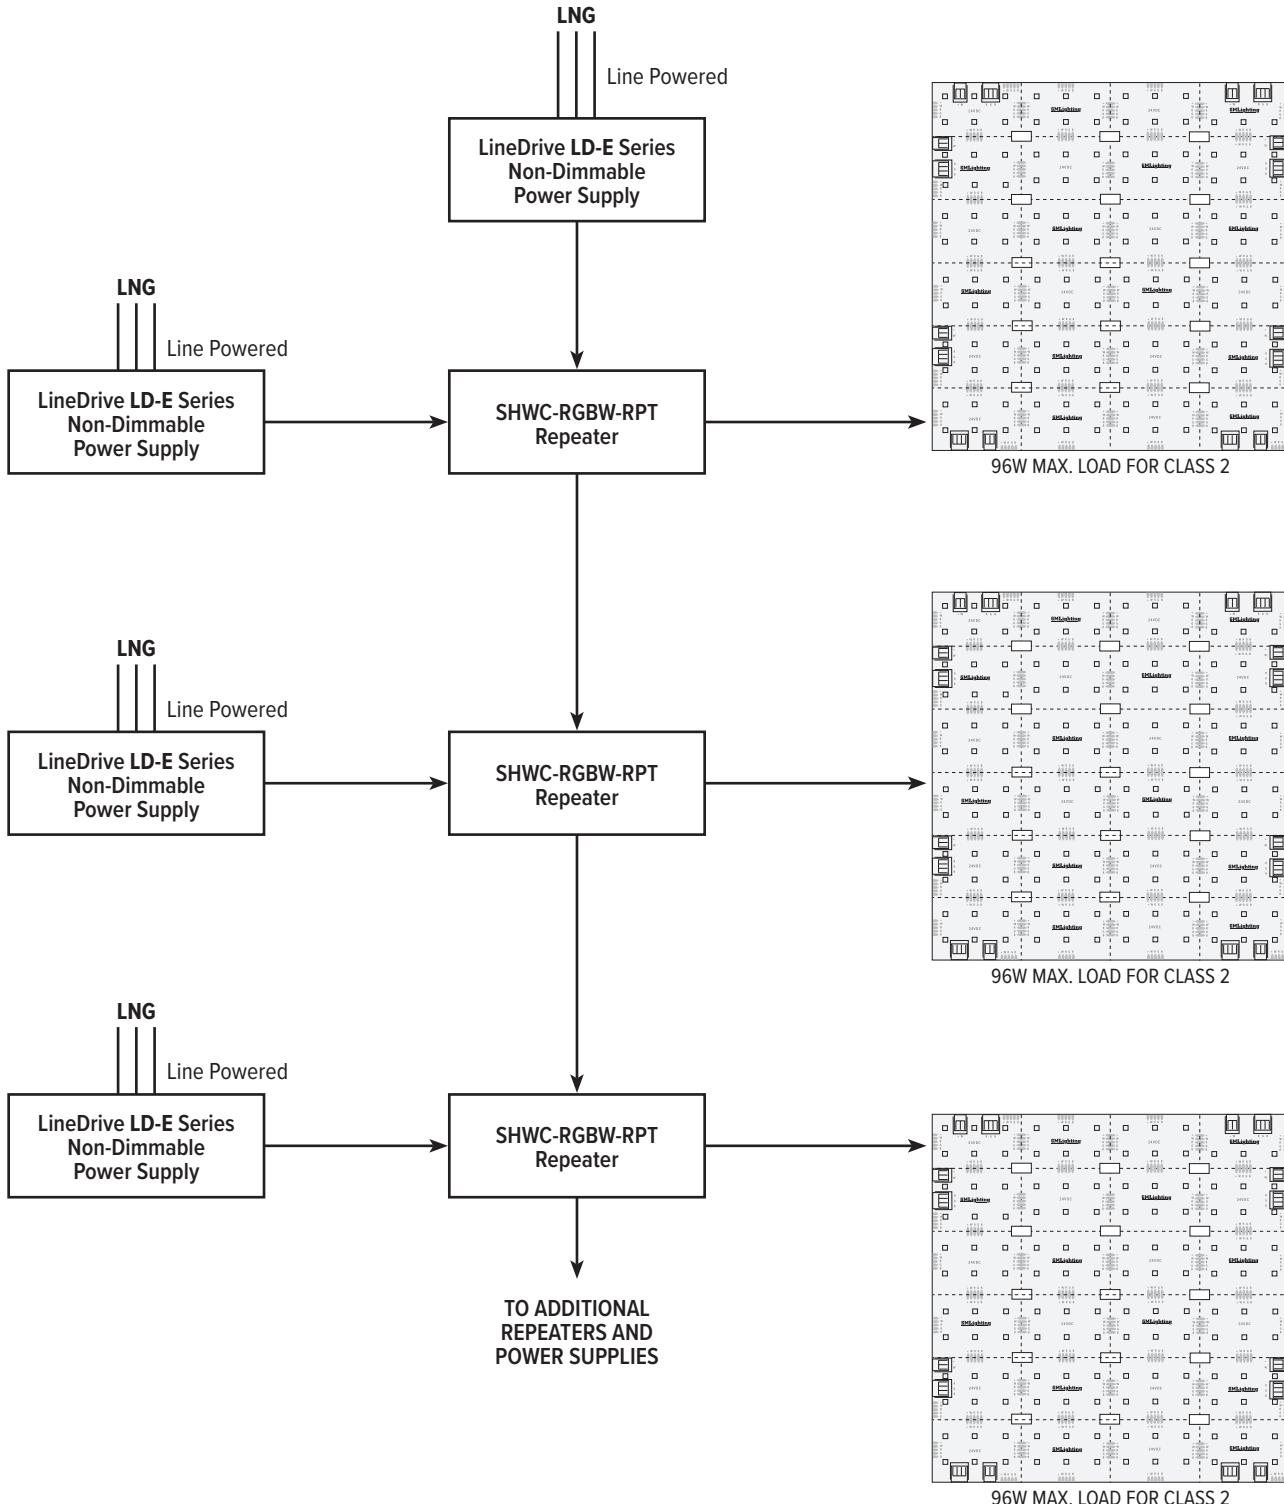


RGBW-DMX-WC DMX WALL CONTROLLER WIRING DIAGRAM

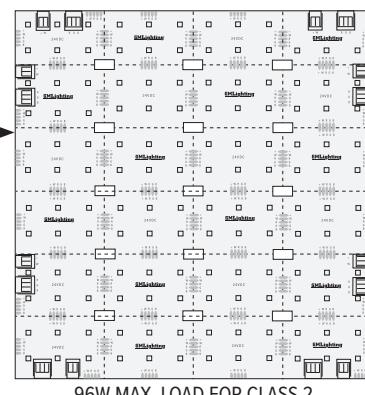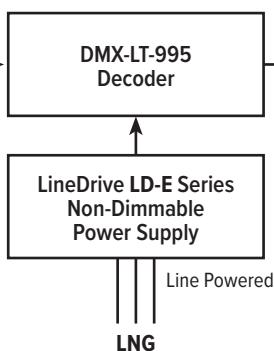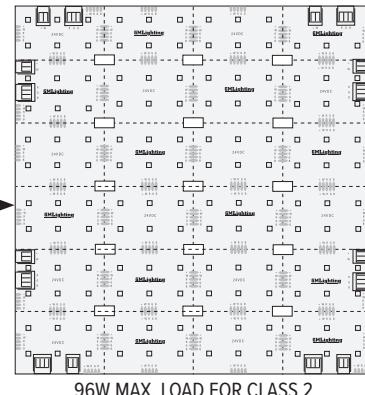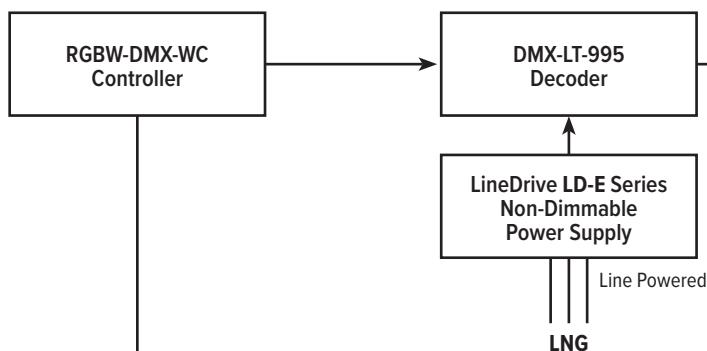



TO ADDITIONAL
REPEATERS AND
POWER SUPPLIES

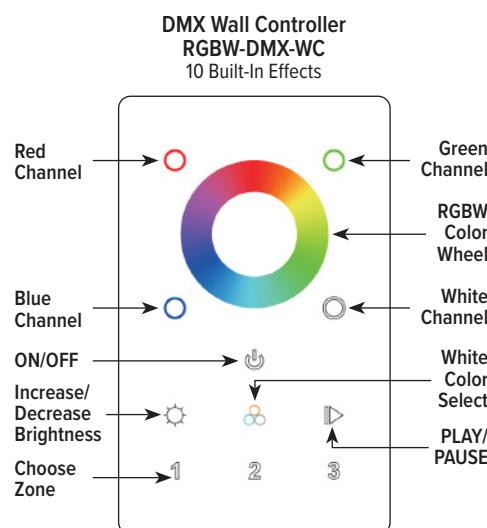

RF REMOTE CONTROLLER AND REPEATER

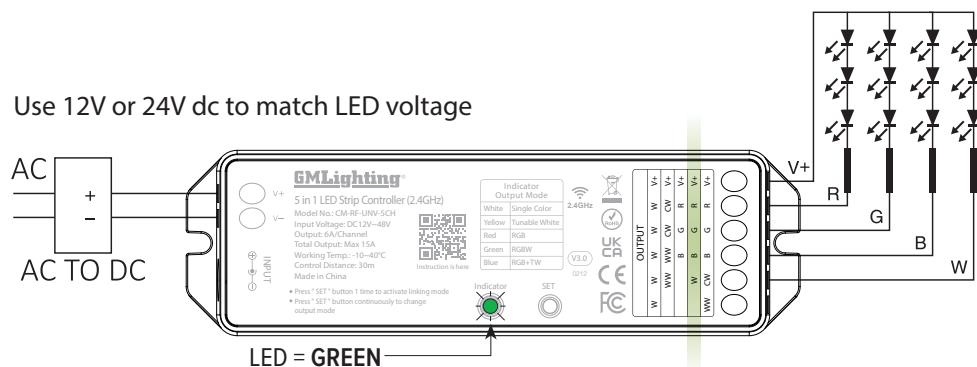

DIMENSIONS

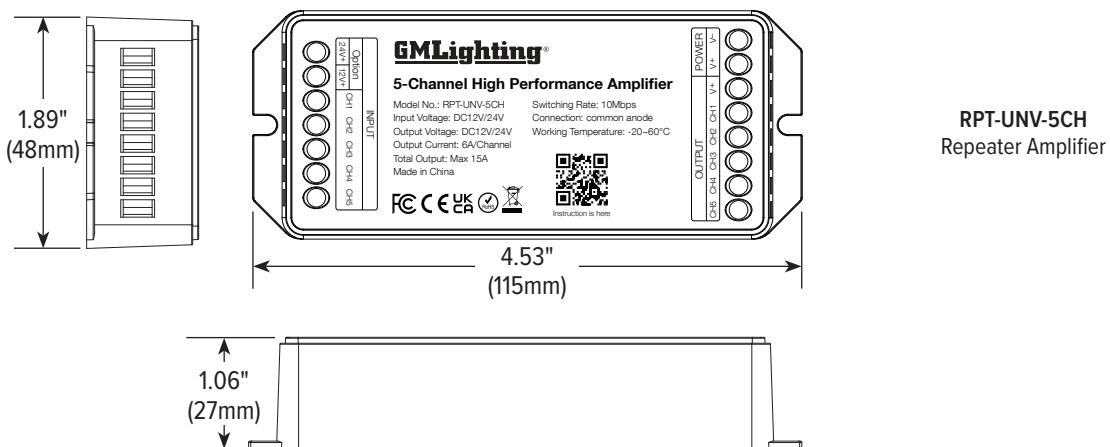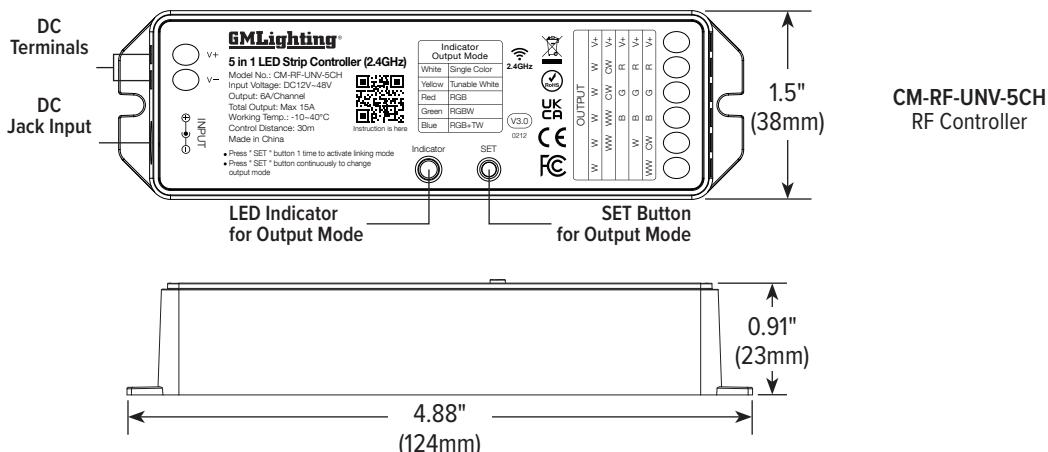

UNIVERSAL RF CONTROLLER WIRING DIAGRAM


Incoming power for (L N G) options can be 120V or 277V.

Check power supply for proper input voltage and output power required.

Power Supply output voltage must match LED operating voltage. (24VDC)

Power supply used **MUST NOT BE DIMMED** at the input to properly power the controls.

See Controller instructions for pairing and wiring details.

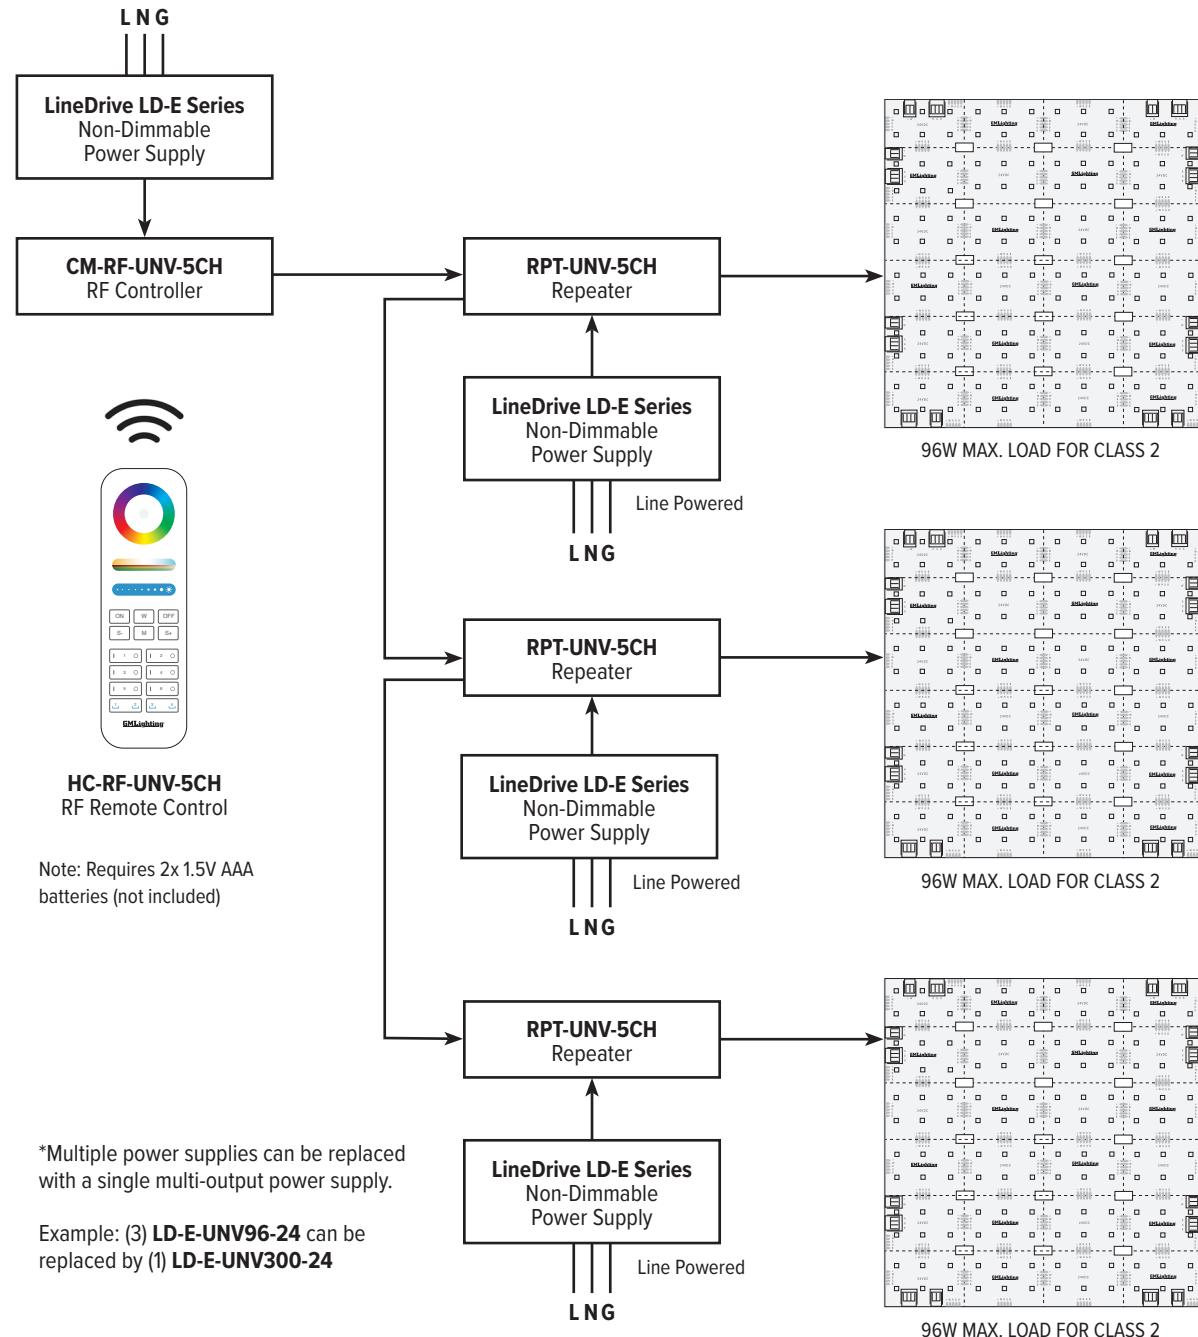

Lamina RGBW

24VDC Configurable
Laminated Sheet

GMLighting®

RF HAND HELD REMOTE FEATURES AND DIMENSIONS

