

Lamina RGBW

24VDC Configural Laminated Sheet



Project Name	Type
Catalog #	Date

PRODUCT OVERVIEW

Lamina RGBW is a 24VDC flexible light sheet that can be cut in the field into geometric or irregular shapes, creating limitless illumination for signage, light panels, retail display, back lighting and themed lighting applications. Easy installation with no heat sink required. Standard 12" x 12" sheets make it easy to plan your layout and install (see next page).



FEATURES

- RGBW (with 3000K white light)
- 90+ CRI
- Dimmable
- Connectible via integral push-in connectors
- 3M Double-sided tape for mounting
- 3M tape, staple or screw mounting options
- For indoor use only
- Tight diode to diode spacing for even illumination and no hot spots
- New convenient size 12x12in = 1 Sq. Ft
- Invisible Stand-Off support option allows even illumination with translucent panels (easily raises diffusion translucent panels 0.91" - 2.0" above Lamina. For horizontal surface use only).
- Not intended for outdoor use
- Operating temp. -4°F - 122°F*

SPECIFICATIONS

ELECTRICAL

- 11.5W / Sq.Ft.
- 24VDC
- PCB zones

LABEL

- ETL
- IP20

OPTICS

- 5050 RGBW SMD
- 144 LEDs with 1" spacing
- 90+ CRI
- 3000K white light (420lm)

WARRANTY

- 5-years


ORDERING INFORMATION

Example: S12X12-RGBW

Series	-	Color Temp.
S12X12-RGBW	-	RGBW (3000K WHITE CHANNEL)

CONNECTORS

Catalog No.	Description
S12X12-RGBW-SSC	Sheet to Sheet Wire Connector

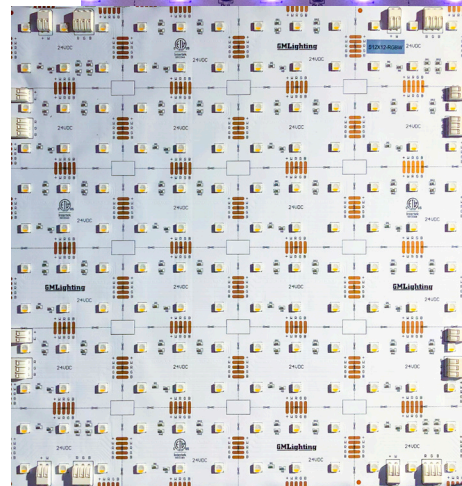

Sheets can be rotated to get cut lines into the best orientation for the application. Align all sheets the same way.

Your Lamina Specification Checklist:

1. Select Sheets
2. Select Connectors
3. Select Channels
4. Select Controllers
5. Select Power Supplies

INSTALL SHEET



SCAN ME

Catalog No.	Output	Dimension	Wattage	Lumens	CRI
S12X12	RGBW	12" x 12"	11.5W / Sq. Ft.	434 lm White Light	90+ (White Only)

STAND-OFF ACCESSORIES

Model	Description	Diameter	Height Range	Max. Load	Recommended Screw Size (not included)
GM-SOC-1	Clear, Acrylic w/clear 3M tape	13mm (0.62")	23mm (0.91") to 33mm (1.30")	6 lbs.	#6 x 3/4" Pan Head Sheet Metal Screw
GM-SOC-2	Clear, Acrylic w/clear 3M tape	19mm (0.75")	36mm (1.42") to 51mm (2.00")	10 lbs.	#8 x 3/4" Pan Head Sheet Metal Screw

Note: Stand-offs come in sets of 4

COMPATIBLE CONTROLLERS

Model	Description
SHWC-RGBW	LUXcontrol Smart 2.4 GHz WiFi Controller, Standard 12V/24V Low Voltage, RGBW, 4-Channel / 5-Wire
SHWC-RGBW-RPT	LUXcontrol Universal Smart Power Repeater
DMX-LT-995	5-Channel DMX Decoder
RGBW-DMX-WC	DMX Wall Controller
HC-RF-UNV-5CH	Universal 1-5 Channel RF Remote Control
RPT-UNV-5CH	Universal 1-5 Channel Repeater Amplifier
CM-RF-UNV-5CH	Universal 1-5 Channel Control Module

RECOMMENDED DRIVERS

Catalog No.	Description	Watts	Specification Sheet
LD-XD-UNV	LineDrive Electronic Multi-Dimmable Power Supply, 12VDC or 24VDC	20W, 40W, 60W, 96W, 180W, 200W, 300W	View Spec Sheet
LD-MD-UNV	LineDrive Magnetic Dimmable Power Supply, 12VDC or 24VDC	30W, 60W, 96W, 150W, 200W, 300W	View Spec Sheet
LD-EDM	LineDrive Electronic Dimmable MINI Power Supply, 12VDC or 24VDC	60W	View Spec Sheet
PSD	Electronic Dimmable Power Supply, 12VDC or 24VDC	15W, 24W, 60W, 90W	View Spec Sheet

Please see our website for updated power supply specifications and information.

CORD & PLUG DRIVERS


Catalog No.	Description	Watts	Weight	Dimensions
LTP24-48	24VDC - 48W - 2 amps - 120V - 120V Cord (72") and plug. Short circuit, overload protection - LED indicator for power on. UL listed	48W	1.8 lbs.	4.68"L x 2.05"W x 1.25"H
LTP24-90	24VDC - 90W - 3.75 amps - 120V - 120V Cord (72") and plug. Short circuit, overload protection - LED indicator for power on. UL listed	90W	1.8 lbs.	4.68"L x 2.05"W x 1.25"H

Please see our website for updated power supply specifications and information.

LAMINA DIAGRAM

Installation:
Attach stand-off to Lamina board on center with rectangles. Use adhesive disc or #6 screw (by others). Space out as needed to distribute weight of translucent sheet evenly.


CAUTION:
Stand-offs are to be used on top of horizontal surfaces only. Not for vertical wall or ceiling applications.

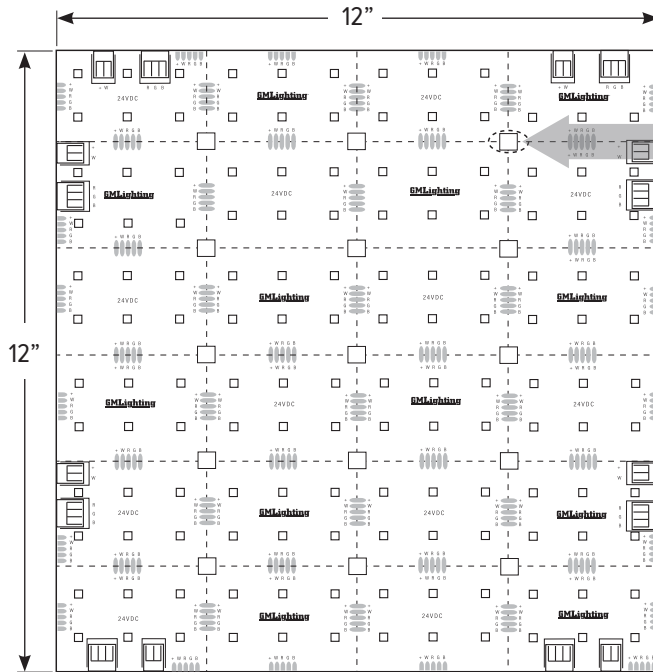


Stand-Off Application

Translucent Sheet
Adjust height by rotating top
Option to apply adhesive disc here to bottom

Minimum radius of one-directional bends is 6". Using a tighter bend will damage product




Create light pillars, illuminated table columns or whatever your imagination can conjure up!

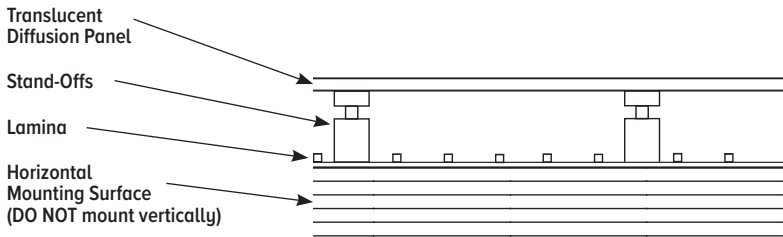

2" Cut Lines (shown in vertical format direction)


Tight diode to diode spacing for even illumination and no hot spots.

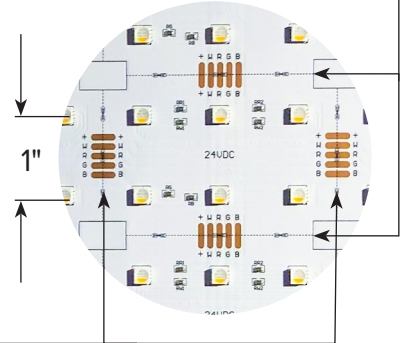

3" Cut Lines (shown in horizontal format direction)

NOTE: Even illumination will vary depending on materials, please verify offset for even illumination.

MULTIPLE PANEL CONNECTION DIAGRAM

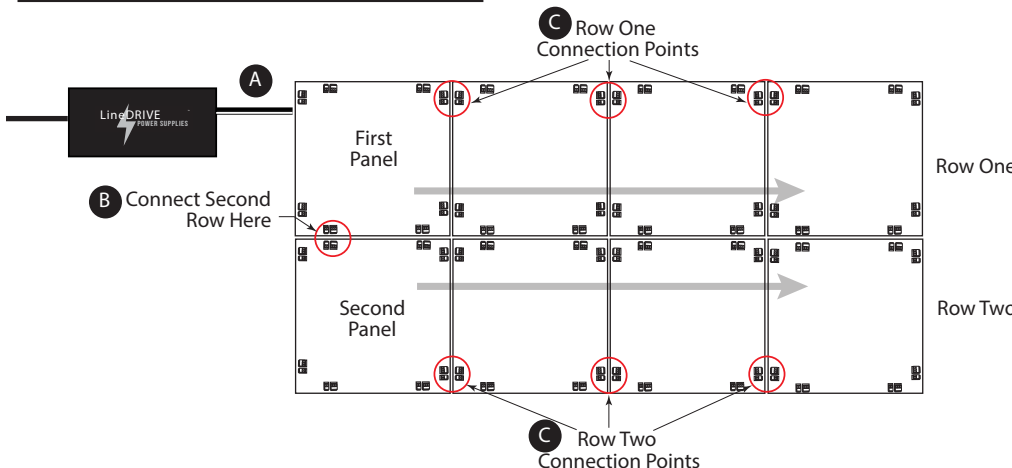



Layout & Wiring Tips (See example):

- A.** Connect power to First Panel (1) in group.
- B.** Connect panel in Row Two, making connection between bottom of First Panel and top of First Panel in Row Two.
- C.** Connect additional panels in each row as you see in the diagram. Remaining panels are connected in one direction only.



Many other layouts can be created for different shapes depending on panel cuts and position.

SHWC-RGBW LUXCONTROL WIFI CONTROLLER

NOTE: Power supply **MUST NOT BE DIMMED** at the input to properly power the controls.

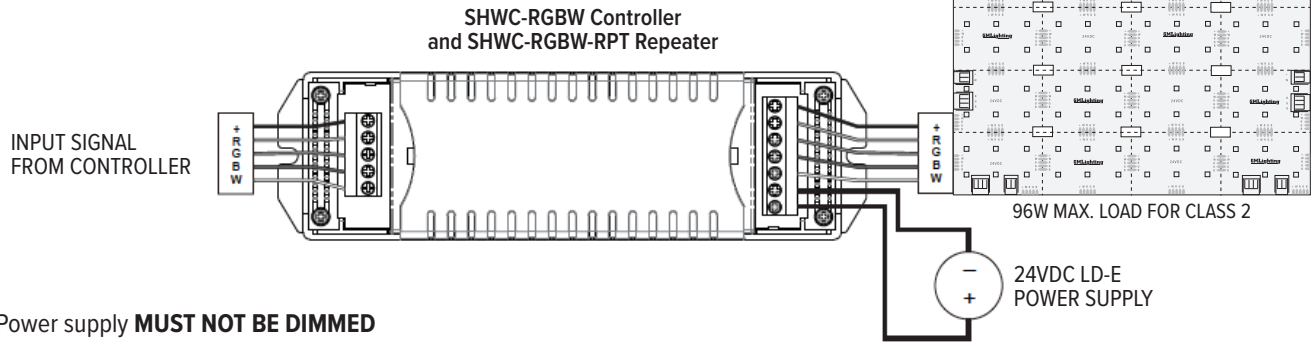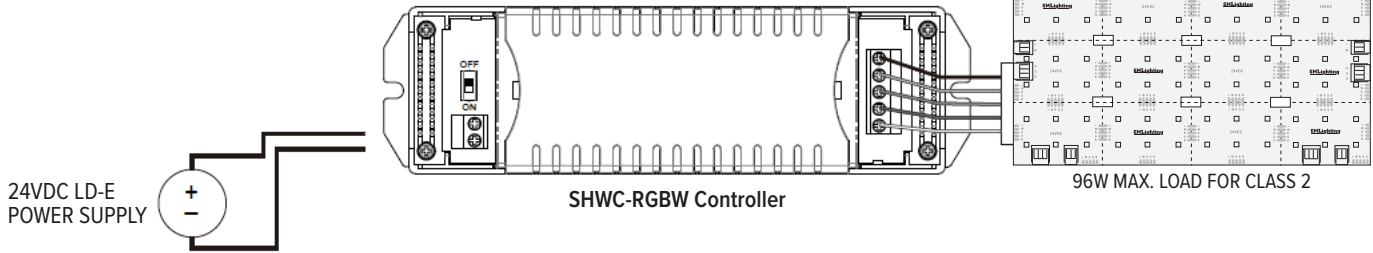

NOTE: Power supply **MUST NOT BE DIMMED** at the input to properly power the controls.

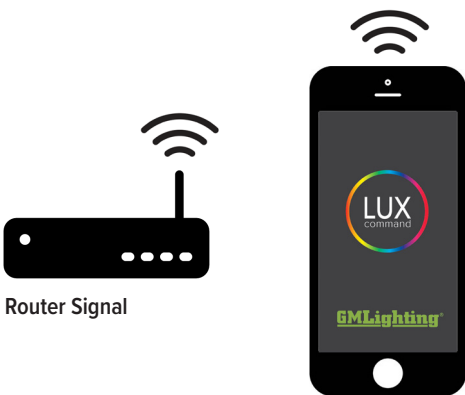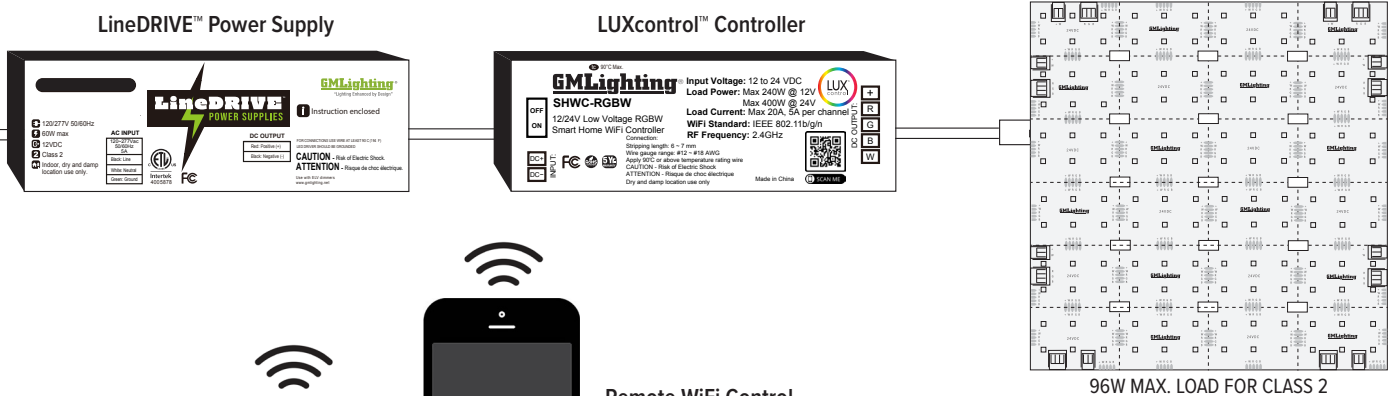


Expandable with universal power repeater (SHWC-RGBW-RPT) for larger projects

Note: For use with LD-E (non-dimmable) or LD-ED (dimmable) power supply only. Not compatible with LD-MD (magnetic) power supply.

SHWC-RGBW LUXCONTROL WIFI CONTROLLER WIRING DIAGRAM

NOTE: Power supply **MUST NOT BE DIMMED**
at the input to properly power the controls.


**GROUP MULTIPLE
CONTROLLERS IN THE
LUXCONTROL APP**

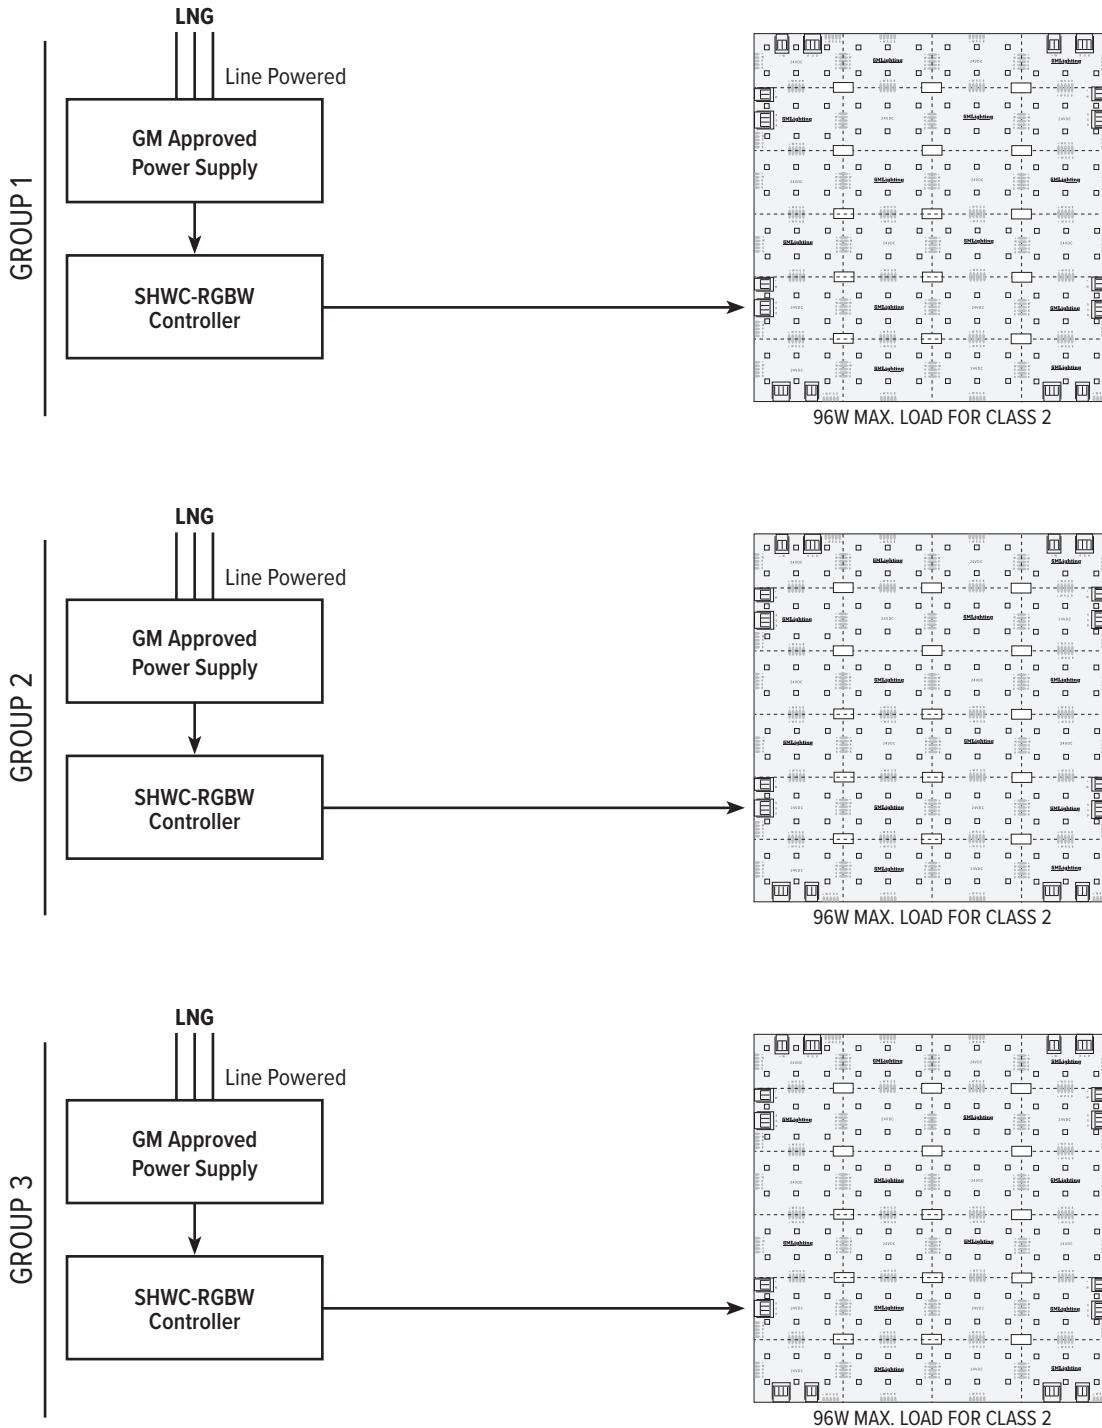


SHWC-RGBW LUXCONTROL WIFI CONTROLLER WITH POWER REPEATER WIRING DIAGRAM

NOTE: Power supply **MUST NOT BE DIMMED** at the input to properly power the controls.

THIS CONFIGURATION WILL SHOW UP AS ONE GROUP IN THE LUXCONTROL APP

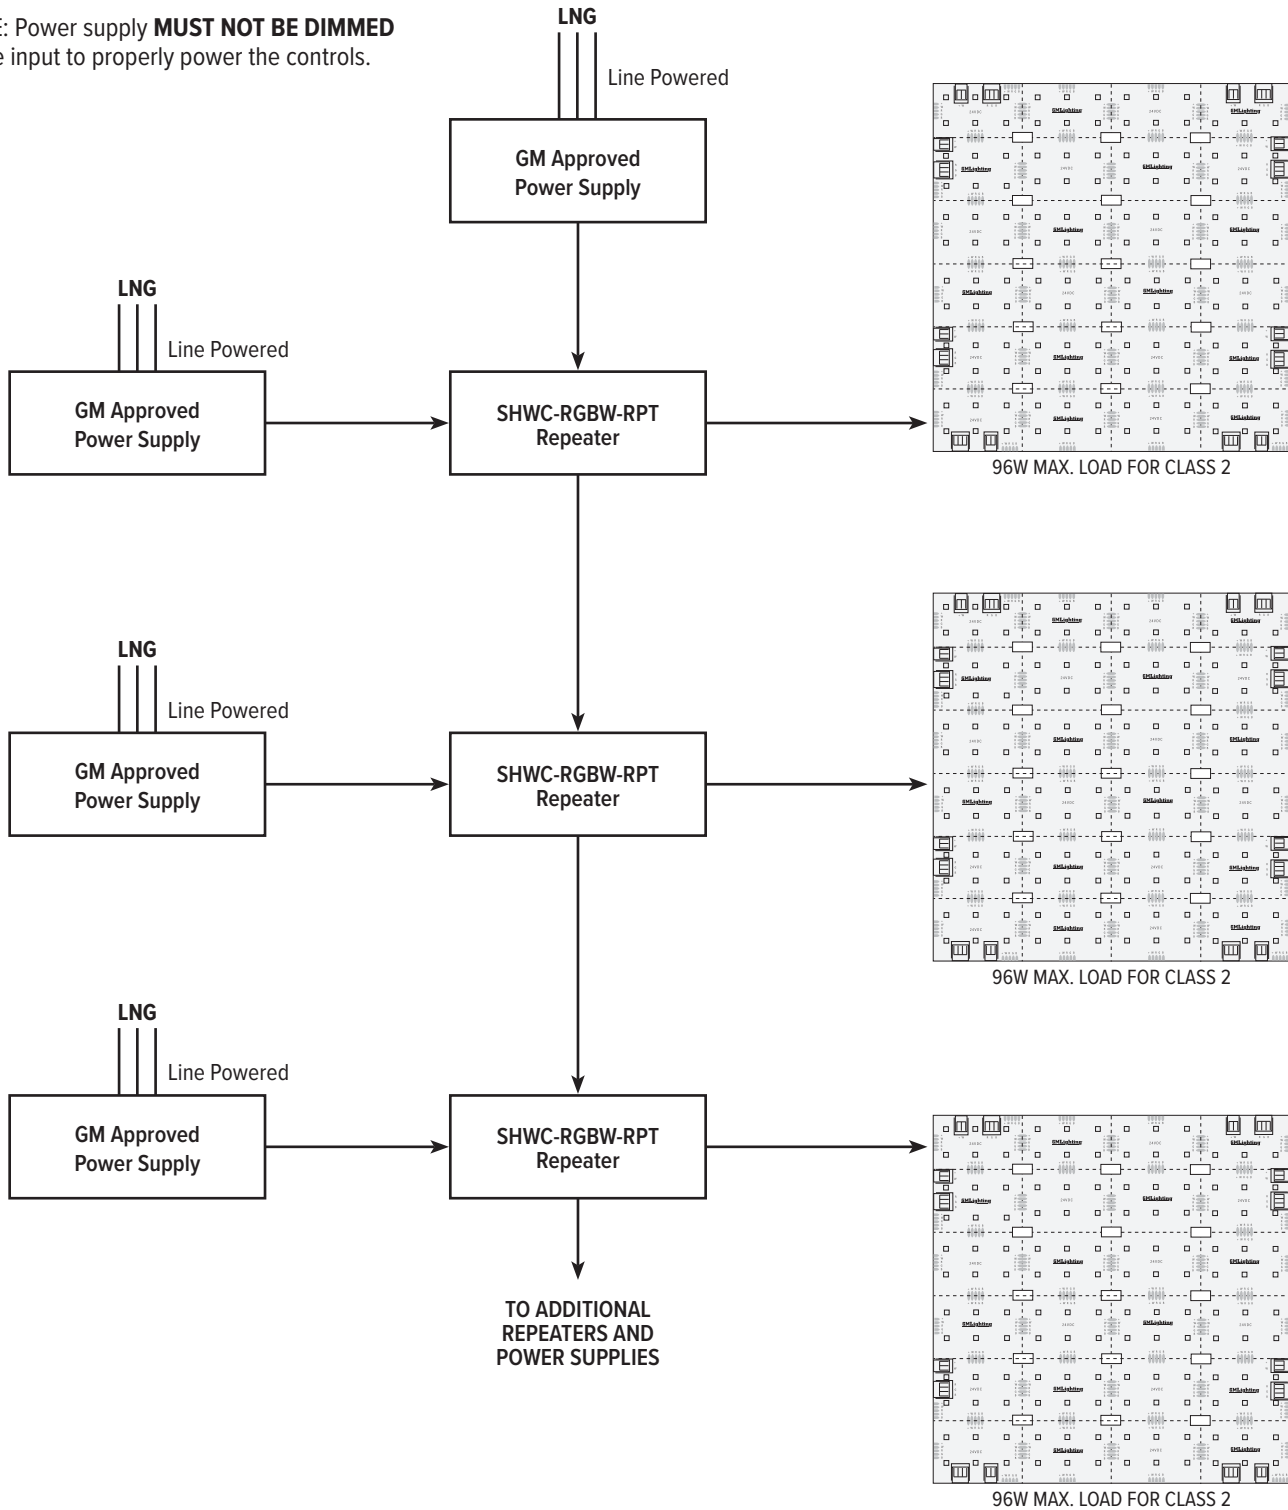


RGBW-DMX-WC DMX WALL CONTROLLER WIRING DIAGRAM



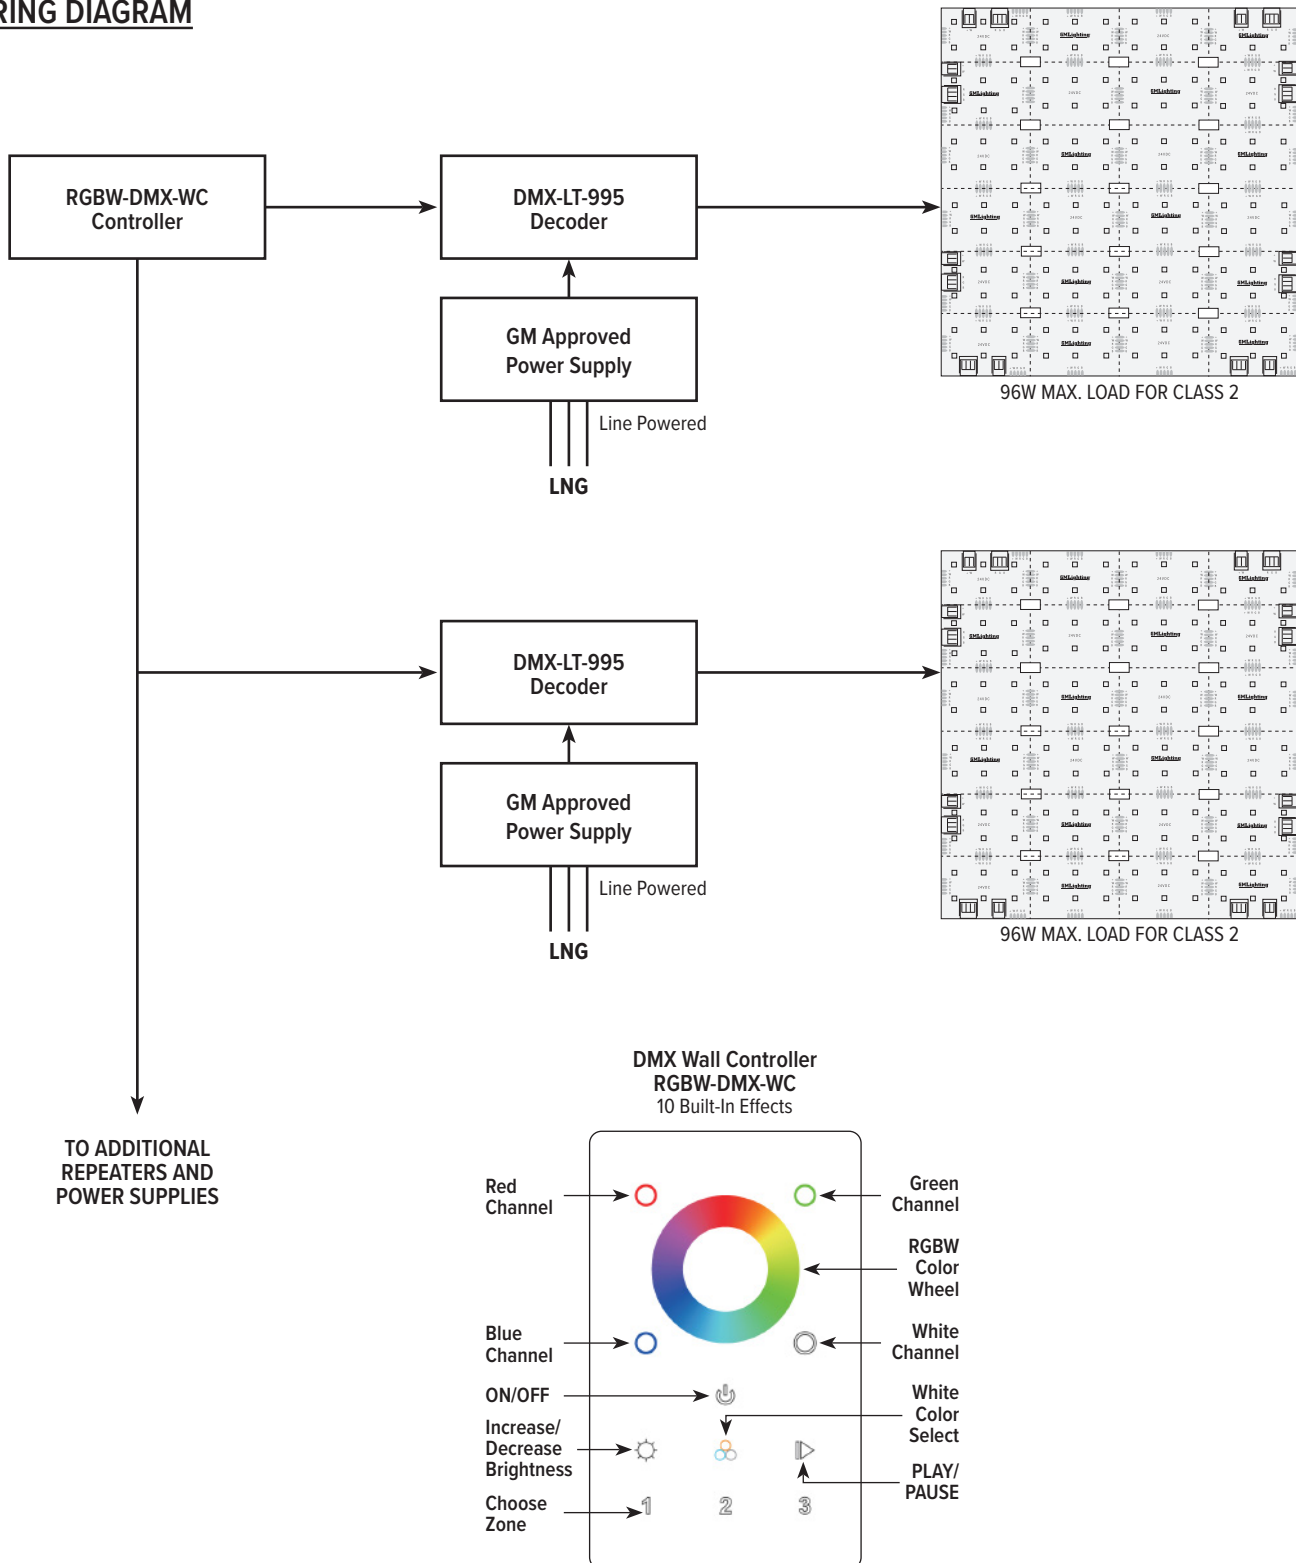


RF REMOTE CONTROLLER AND REPEATER

Use 12V or 24V dc to match LED voltage

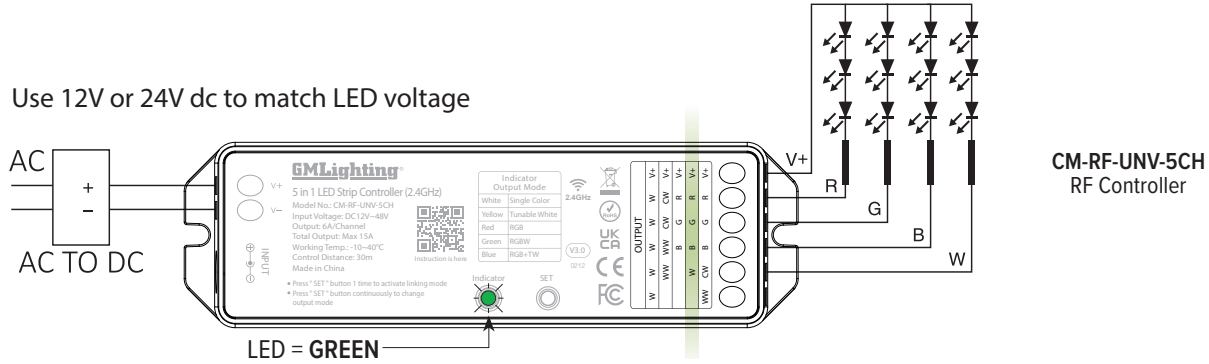


DIMENSIONS

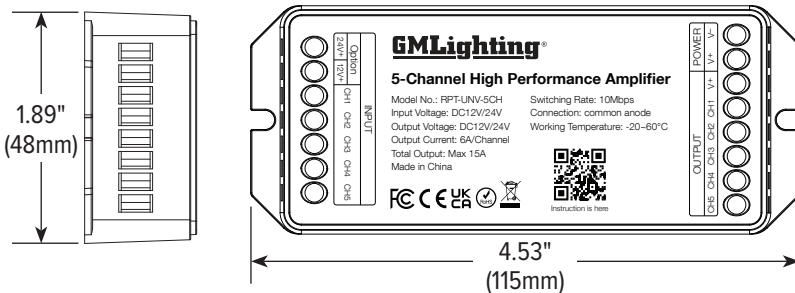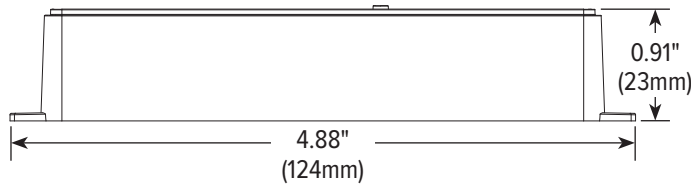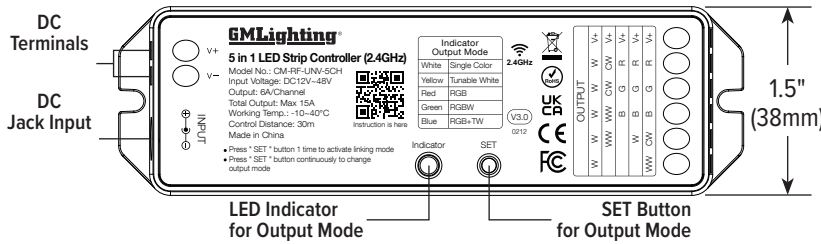

UNIVERSAL RF CONTROLLER WIRING DIAGRAM

Incoming power for (L N G) options can be 120V or 277V.
 Check power supply for proper input voltage and output power required.
 Power Supply output voltage must match LED operating voltage. (24VDC)
 Power supply used **MUST NOT BE DIMMED** at the input to properly power the controls.
 See Controller instructions for pairing and wiring details.

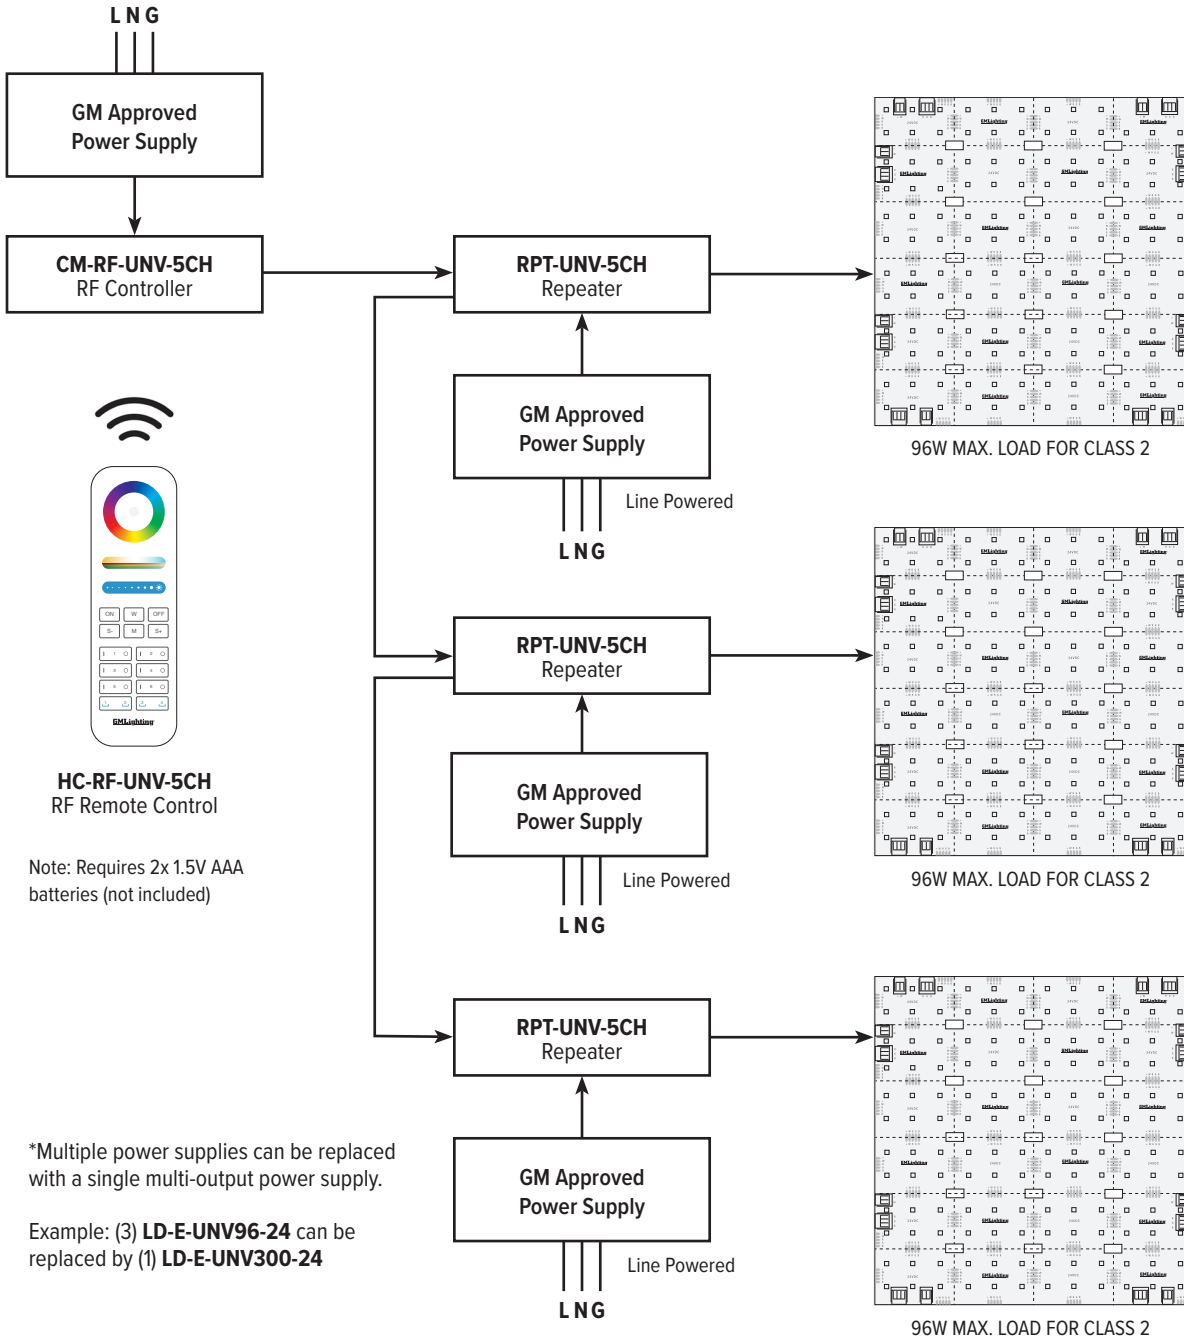

Note: Requires 2x 1.5V AAA batteries (not included)

*Multiple power supplies can be replaced with a single multi-output power supply.

Example: (3) LD-E-UNV96-24 can be replaced by (1) LD-E-UNV300-24

RF HAND HELD REMOTE FEATURES AND DIMENSIONS

