Proxima

120V Closet Rated Proximity Sensor Selectable Lumen Surface Mount Specification Sheet

GMLighting®

Project Name	Type
Catalog #	Date

120 VOLT | 90+ CRI | INDOOR WET LOCATION | TITLE 24-JA8 | CLOSET | intertek | 5 Yr. WARRANTY

PRODUCT OVERVIEW

Proxima is a 120V low profile selectable white surface mount luminaire. It features selectable lumen output as well as motion / proximity sensor operation that illuminates its 90+CRI LED source when the fixture senses that someone has entered its space. Sensitive to occupants within 8ft. of fixture center line at 10 ft. mounting height. See MOTION DETECTOR diagram below



Proxima Product & Installation Video

WATCH NOW

FEATURES

- Selectable: 2700K, 3000K or 4000K
- 8" dia. x 1-3/8" depth
- Proximity sensor
- Not dimmable
- White finish

SPECIFICATIONS

ELECTRICAL

- 120V
- 15W

CERTIFICATIONS

- ETL
- Title 24 / JA8
- Closet Rated*
- Ceiling Mount: Wet location, indoor covered ceiling only
- Wall Mount: Dry or damp location, indoor only, ADA compliant

OPTICS

- 2700K/3000K/4000K
- 770, 870 or 980 lumens
- 90+ CRI

WARRANTY

- 5 years

*Complies with NEC code (NFPA70) 410.16, Suitable for installation within the clothes closet storage space.

ORDERING INFORMATION

EXAMPLE: **PRX-TUN-WH**


	-		-	
Model	-	**Color Temp**	-	**Finish**
PRX		**TUN** (Selectable: 2700K, 3000K, 4000K)		**WH** (White)


©2026 GM LIGHTING, LLC • www.gmlighting.net • Specifications subject to change without notice
18700 Ridgeland Ave., Tinley Park, IL 60477 • Toll-Free: (866) 671-0811 FAX: (708) 478-2640 • tech@gmlighting.net

Proxima

120V Closet Rated Proximity Sensor
Selectable Lumen Surface Mount
Specification Sheet


DIMENSIONS

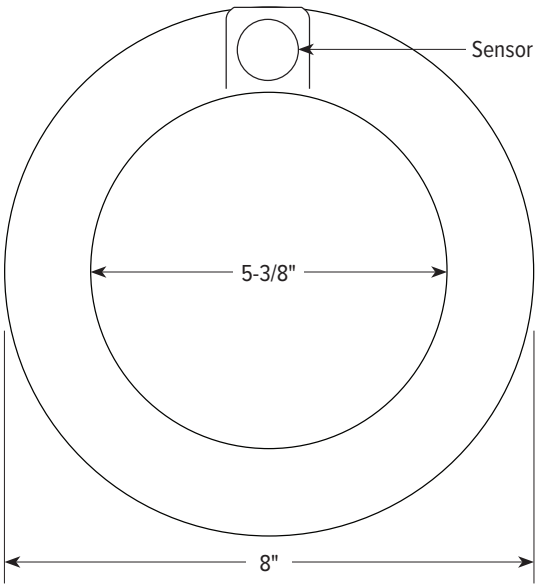

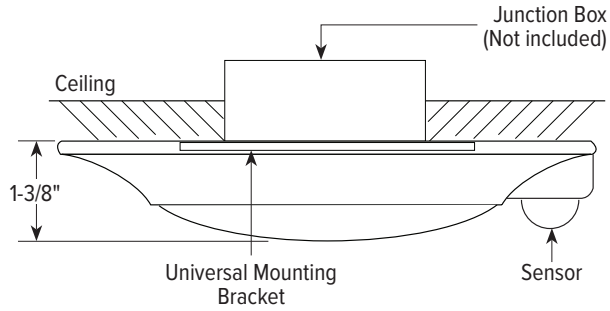

MOTION DETECTOR

Sensitive to 8' in all directions on center. Detection circumference is 16'. Sensor turns luminaire off after 30 seconds of undetected motion.

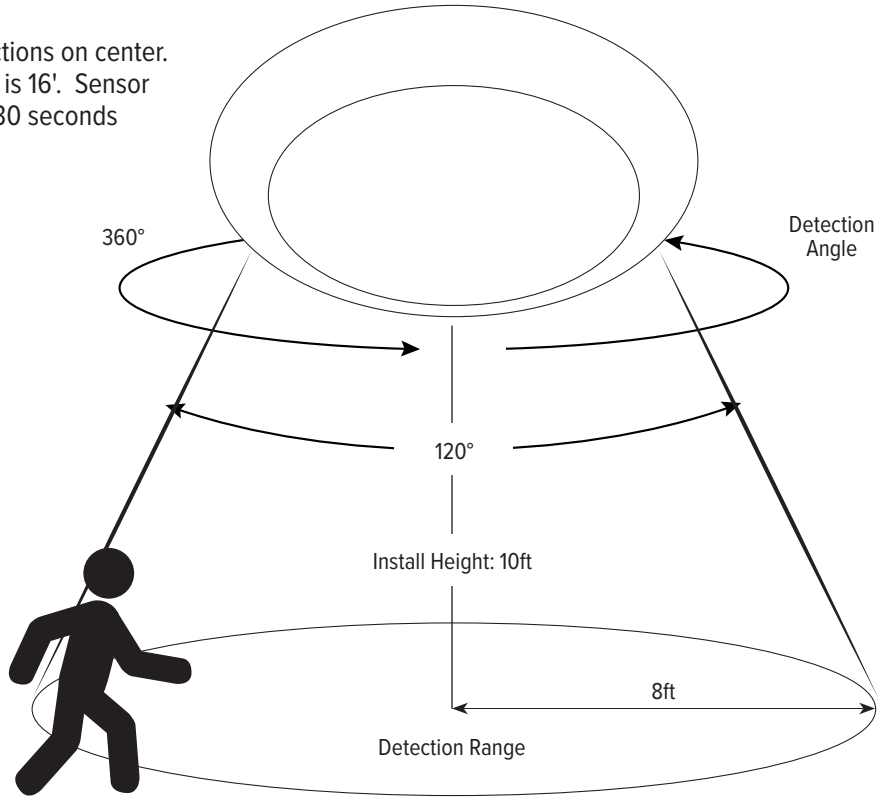

©2026 GM LIGHTING, LLC • www.gmlighting.net • Specifications subject to change without notice
18700 Ridgeland Ave., Tinley Park, IL 60477 • Toll-Free: (866) 671-0811 FAX: (708) 478-2640 • tech@gmlighting.net