R6 Series

120V Surface Mount Downlight
6” Low Profile Disk Specification Sheet

GMLighting®

Project Name	Type
Catalog #	Date

PRODUCT OVERVIEW

A closet rated, wet location and Title 24 approved circular surface mount downlight that features white powder coat steel housing with white opal lens and full gasketing. Mounts to standard fixture box or with recessed R6-RKT mounting kit, ordered separately. See below.

FEATURES

- 120V operation
- 3CCT selection switch
- Dimmable (TRIAC)
- Full foam gasketing
- Closet rated: suitable for installation within the clothes closet storage space
- Mounts to a standard J-Box or 6” recessed downlight (requires R6-RKT mounting kit)
- 3-year warranty



SPECIFICATIONS

ELECTRICAL
- 120V
- 15W

OPTICS
- 90+ CRI
- 120° beam angle
- 3000K
- 4000K
- 5000K

CERTIFICATION
- CSA-US
- Closet rated - Conforms to NEC 410.16
- Title 24
- Ceiling Mount: Wet location, indoor covered ceiling only
- Wall Mount: Dry or damp location, indoor only, ADA compliant

OPERATING TEMP
- -4°F to 122°F (-20°C to +50°C)

WARRANTY
- 3 years

DO NOT INSTALL fixture where it will operate outside of it’s temperature range (-4°F - 122°F).

ORDERING INFORMATION

EXAMPLE: R6-TUN-WH

Catalog No.	Color Temp	Finish
R6	**TUN**	**WH** (White)

©2026 GM LIGHTING, LLC • www.gmlighting.net • Specifications subject to change without notice
18700 Ridgeland Ave., Tinley Park, IL 60477 • Toll-Free: (866) 671-0811 FAX: (708) 478-2640 • tech@gmlighting.net


R6 Series

120V Surface Mount Downlight
6” Low Profile Disk Specification Sheet

ACCESSORIES

Catalog No.	Description
R6-RKT	Retrofit kit for R6 fixture

DIAGRAM

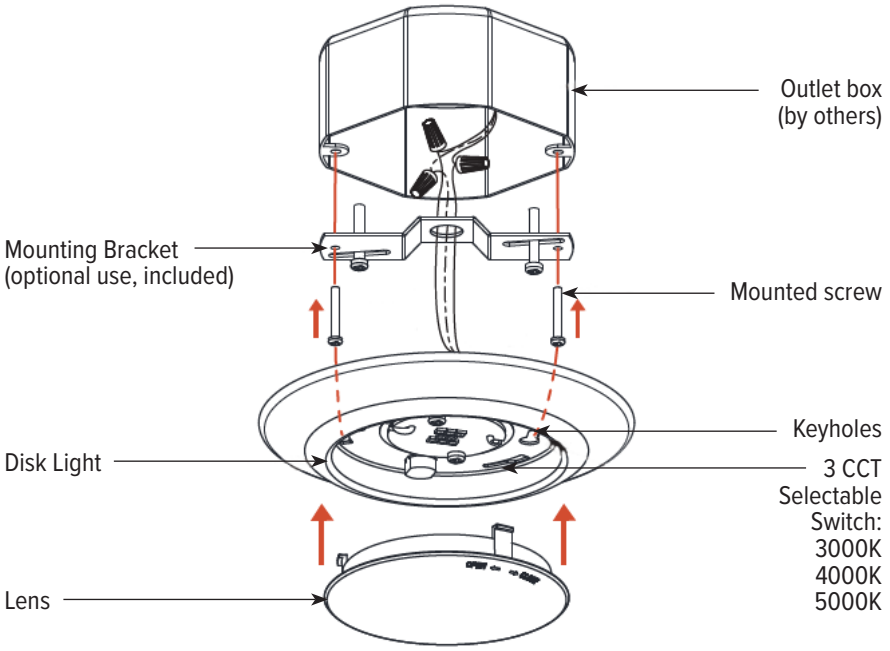

DIMENSIONS

R6

