

Surface Mount Downlight

120V S6 Series Specification Sheet

6" Low Profile Disk



PRODUCT OVERVIEW

These circular surface mount downlights are closet rated for use throughout residential or commercial sites. Constructed of a high quality aluminum body with translucent white polycarbonate diffuser for low glare and durability. S6 luminaires are versatile and provide high quality illumination which meets Title 24/JA8 requirements.

FEATURES

- 3CCT selection switch
- Dimmable, ELV, Triac switch
- Mounts to standard 6" outlet box
(requires mounting kit, S6-RKT). Also mounts to a shallow box

SPECIFICATIONS

ELECTRICAL

- 120V (power supply not required)
- 15W

CERTIFICATION

- ETL
- ADA compliant
- Closet Rated: Complies with NEC code (NFPA70) 410.16, Suitable for installation within a clothes closet storage space
- Title 24
- Wet location, indoor covered ceiling
- -4 to 122 F operating temp

WARRANTY

- 5 year warranty

Project Name	Type
Catalog #	Date



APPLICATIONS

- General use
- Closets
- Pantries
- Hallways
- Bathroom
- Laundry Room

NOTE: Do not install in an environment outside the listed ambient temperature

ORDERING INFORMATION

Example: S6-TUN-WH

Model	Color Temp	Color
S6	TUN	WH (White)

PHOTOMETRIC INFORMATION

Catalog No.	Performance	Lumens Levels	2700K	3000K	4000K
S6-TUN-WH (3CCT)	CRI: 90+ 120° beam angle	Lumens	851	910	982
		Lumen Factor	0.93	1.00	1.08

ACCESSORIES

Catalog No.	Description
S6-RKT	Retrofit kit for S6 fixture. Includes all hardware and screw-in 120V adapter.




Surface Mount Downlight

120V S6 Series Specification Sheet 6" Low Profile Disk

GM Lighting®

FIXTURE BODY

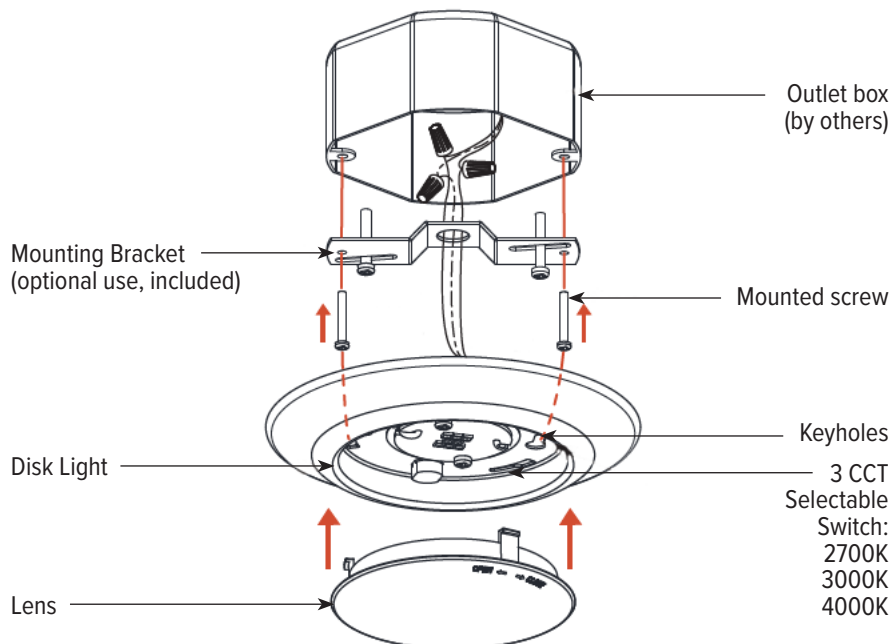

DIMENSIONS

