Surface Mount Downlight

120V S9 Series Specification Sheet
9” Low Profile Disk

GMLighting®

Project Name	Type
Catalog #	Date

120 VOLT | INDOOR WET LOCATION | TITLE 24 | Intertek | 5 Yr. WARRANTY

PRODUCT OVERVIEW

9.5” diameter circular surface mount downlight has a high lumen output for larger spaces. Constructed of a high quality aluminum body with translucent white polycarbonate diffuser for low glare and durability. S9 luminaires are versatile and provide high quality illumination which meets Title 24/JA8 requirements.

FEATURES

- Dimmable (Triac)
- 5CCT Selection Switch
- Powder coated metal housing with white opal diffuser



SPECIFICATIONS

ELECTRICAL

- 120V
- 15W

CERTIFICATION

- ETL
- Title 24-JA8
- Ceiling Mount: Wet location, indoor covered ceiling only
- Wall Mount: Dry or damp location, indoor only, ADA compliant
- Operating temp. -4°F - 122°F*

WARRANTY

- 5 year warranty

APPLICATIONS

- General use
- Hallways
- Bathroom
- Utility room

NOTE: Do not install in an environment outside the listed ambient temperature

ORDERING INFORMATION

Example: S9-TUN-WH

Model	Color Temp	Color
S9	**TUN**	**WH** (White)


PHOTOMETRIC INFORMATION

Catalog No.	Performance	Lumens Levels	2700K	3000K	3500K	4000K	5000K
S9-TUN-WH (5CCT)	**CRI: 90+ 120° beam angle**	**Lumens**	1760	1820	1930	1975	1965
		Lumen Factor	0.97	1.00	1.06	1.09	1.08


©2024 GM LIGHTING, LLC • www.gmlighting.net • Specifications subject to change without notice
18700 Ridgeland Ave., Tinley Park, IL 60477 • Toll-Free: (866) 671-0811 FAX: (708) 478-2640 • tech@gmlighting.net

Surface Mount Downlight

120V S9 Series Specification Sheet
9” Low Profile Disk

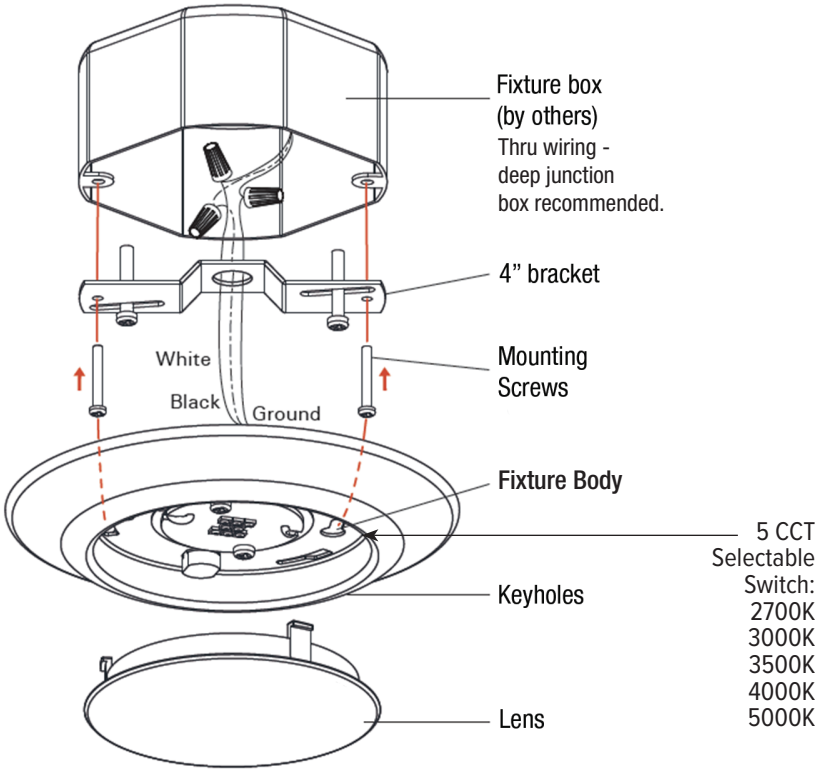

PRODUCT DIAGRAM

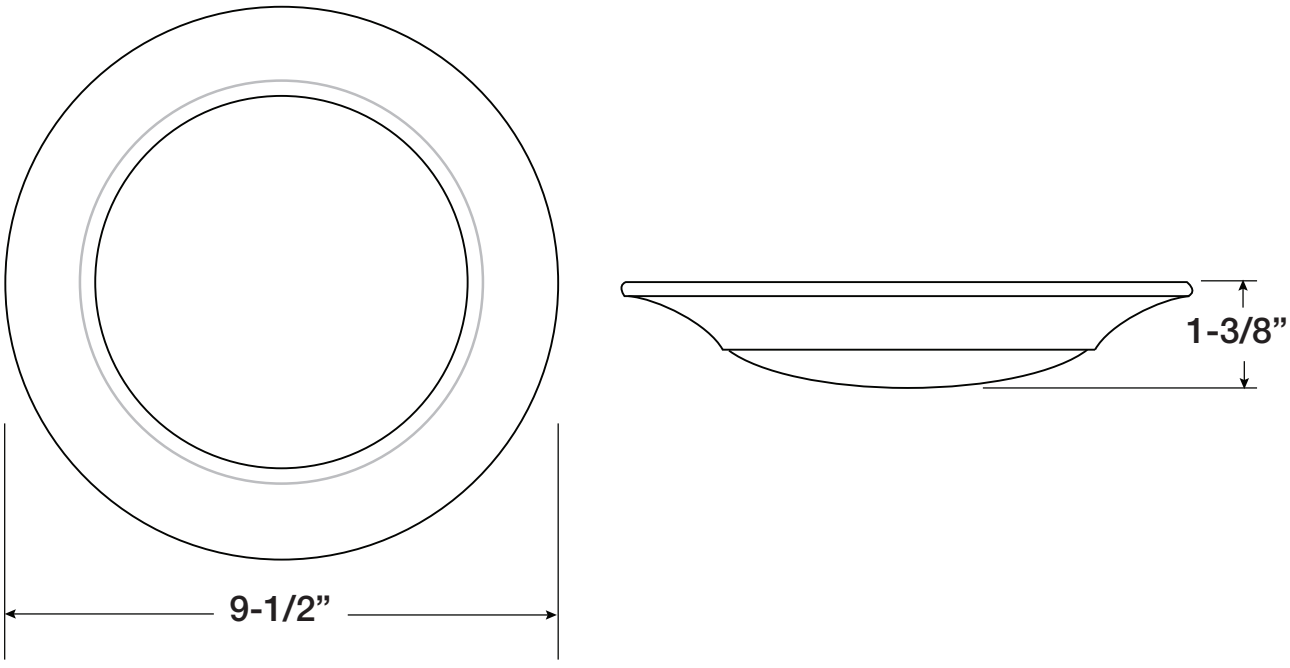

©2024 GM LIGHTING, LLC • www.gmlighting.net • Specifications subject to change without notice
18700 Ridgeland Ave., Tinley Park, IL 60477 • Toll-Free: (866) 671-0811 FAX: (708) 478-2640 • tech@gmlighting.net