

ALUMINUM MOUNTING CHANNEL

4' / ' MINI DEEP WITH FLANGE

PRODUCT OVERVIEW

GM Lighting's LED-CHL-XD-MD-F flange channels accept all GM Lighting LED tape. Available in 48" and 120" lengths, these mounting channels are the perfect vessel that not only insures an architectural quality installation, but also provides diode-free imaging due to the frosted lens that is included with each channel.

FEATURES

- Available in 4ft (48in) and 120ft (10 in)
- Silver Anodized, Black Anodized, White Powder Coated
- Includes 2 mounting clips and screws with 4ft, 4 mounting clips and screws with 120ft
- Includes acrylic frosted lens
- End caps sold separately
- Available with or without flange (see LED-CHL-XD-MD specsheet for non-flange option)
- For LTR Series Tape - LTR-P, LTR-S and LTR-E
- Custom lengths available - consult factory
- Coverage: 100% (100% coverage)

100% coverage

GM Lighting®

Project Name	Type
Catalog #	Date



SPECIFICATIONS

ELECTRICAL	OPERATING TEMP
Fits 12V/24V LED task LED tape	-4 to 122°F (-20 to +50°C)
WARRANTY	CERTIFICATION
5-year warranty	IP65

ORDERING INFORMATION

Example: LED-CHL-XD-MD-F-WH

Model	Type	Format	Length	Color
LED-CHL	XD	MD-F	Blank (4 ft.)	Blank (Silver Anodized)
			(ft.)	WH (White Powder Coated)
				B (Black Anodized)

Accessories


Model	Description
LED-CHL-XD-MD-F-EC	(2) End caps - one solid, one with wiring hole
LED-CHL-XD-MD-F-DC	(2) Drywall spring clips with mounting screws
LED-CHL-XD-MD-F-ECWH	(2) White End caps - one solid, one with wiring hole
LED-CHL-XD-MD-F-ECB	(2) Black End caps - one solid, one with wiring hole

ALUMINUM MOUNTING CHANNEL

4' / 6' MINI DEEP WITH FLANGE

Model	Dimensions	Connectors	Compatibility	Finish
LED-CHL-XD-MD-F	L48" or 72" x W1.25" x D.56"	Sure-Tite and EZ Connectors	LTR-P, LTR-S, LTR-E Series Dry and Wet Location	Blank (Silver Anodized)
LED-CHL-XD-MD-F-6				WH (White Powder Coated)
LED-CHL-XD-MD-F-WH				
LED-CHL-XD-MD-F-6-WH				
LED-CHL-XD-MD-F-B				
LED-CHL-XD-MD-F-6-B				B (Black Anodized)

DIAGRAM

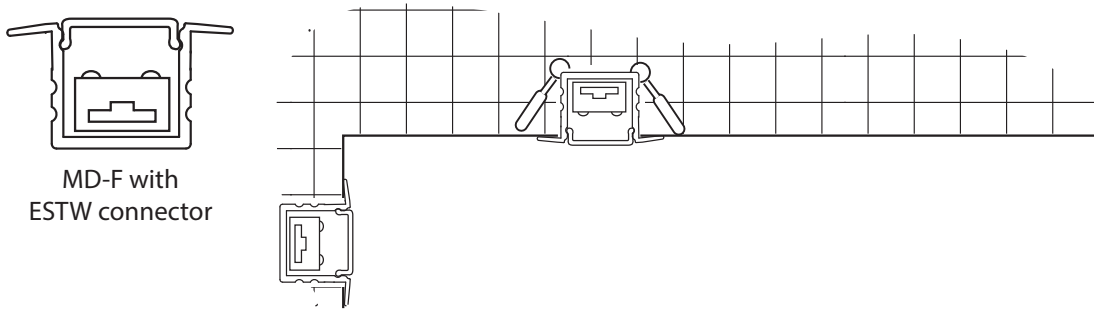

DIMENSIONS

