

Path Light

ILS-P400-XX Path Light Specification Sheet



PRODUCT OVERVIEW

The Irradiar Landscape Path Lights by GM Lighting are premium-grade, pathway lights designed to enhance outdoor spaces with subtle and even illumination. This modern "L" shape is engineered for function and style. It features a durable construction and a minimalist design. The small form factor fits perfectly along pathways and garden beds while adding ambiance to your landscape.

FEATURES

- Frosted glass
- Antique Brass or Black finish
- Ground stake: ILS-A100P (included)
- G4 LED lamps (not included)
- 6ft Direct Burial Cable, 18AWG

SPECIFICATIONS

ELECTRICAL

- 12V (nominal) low voltage
- 4W G4 (max lamp wattage)

CERTIFICATION

- cETLus
- IP65

WARRANTY

- 10 years (visit: gmlighting.net/warranty)

Project Name	Type
Catalog #	Date

12
VOLT

JWET
LOCATION

G4
LAMP

MOUNTING
STAKE
INCLUDED

IP
65

ETLus
Intertek

10Yr
WARRANTY



ORDERING INFORMATION (STEP 1-4):

1. SELECT FIXTURE

Product No.	Description
ILS-P400-AB	Modern L Antique Brass Path Light

NOTE: For other finish options not shown, consult GM Lighting for availability

Product No.	Description
ILS-P400-BK	Modern L Black Path Light

2. SELECT A COMPATIBLE GM LAMP

G4 (WP series, Water Protection): WHITE | G4 (Damp Location): WHITE

Watts	CCT	Lumens	WP series	Damp Location
2W	2700K	180lm	LG427K-02W0MWP	LG427K-02W01S
	3000K	180lm	LG430K-02W0MWP	LG430K-02W01S
	4000K	180lm	LG440K-02W0MWP	LG440K-02W01S
3W	2700K	270lm	LG427K-03W0MWP	LG427K-03W01S
	3000K	270lm	LG430K-03W0MWP	LG430K-03W01S
	4000K	270lm	LG440K-03W0MWP	LG440K-03W01S
4W	2700K	380lm	LG427K-04W0MWP	LG427K-04W01S
	3000K	380lm	LG430K-04W0MWP	LG430K-04W01S
	4000K	380lm	LG440K-04W0MWP	LG440K-04W01S

NOTE: Lamps must be used in an outdoor rated luminaire for landscape applications.


Path Light

ILS-P400-XX Path Light Specification Sheet



3. SELECT COMPATIBLE ACCESSORIES

Product No.	Description
ILS-A100P	ILS LG Stake W/Slot Black ABS 1/2 NPS
ILS-A110P	ILS SM Stake W/Slot Black ABS 1/2 NPS
ILS-A130-AB	ILS Stake Cover Brass Antique Brass Finish
ILS-A540-AB	ILS Round Surface Mount Brass, Antique Brass Finish Set Screw 3X SS Black Screws
ILS-A541-AB	ILS Cone Surface Mount Brass, Antique Brass Finish Set Screw 3x SS Black Screws
ILS-A530-AB	ILS Tri-Point Surface Mount Brass, Antique Brass Finish 3x SS Black Screws
ILS-A302-AB	ILS Direct Light Fitting Brass Internal 1/2" IPS Threads Antique Brass Finish
ILS-A700-AB	1/2" NPS Locknut Brass

 ILS LG Stake ILS-A100P	 ILS SM Stake ILS-A110P
 LS SM Stake Cover ILS-A130-AB	 ILS RND Surface Mount ILS-A540-AB
 ILS Cone Surface Mount ILS-A541-AB	 ILS Tri-Point Surface Mount ILS-A530-AB
 1/2" NPS Locknut Brass ILS-A700-AB	 ILS Fitting ILS-A302-AB

4. SELECT COMPATIBLE POWER SUPPLY

Fixtures must be used with 12V nominal power supply. See transformers specification sheets for details, controls and related accessories.

Product No.	Watts	Voltage
ILS-S075A-SS	75W	120Vin, 12/15Vout
ILS-S150B-SS	150W	120Vin, 12/13/14/15Vout
ILS-S300B-SS	300W	120Vin, 12/13/14/15/17/18/22Vout
ILS-S600B-SS	600W (2X300W)	120Vin, 12/13/14/15/17/18/22Vout
ILS-S100C-PC	100W	120Vin, 12/15Vout




Path Light

ILS-P400-XX Path Light Specification Sheet



DIMENSIONS

SIDE VIEW

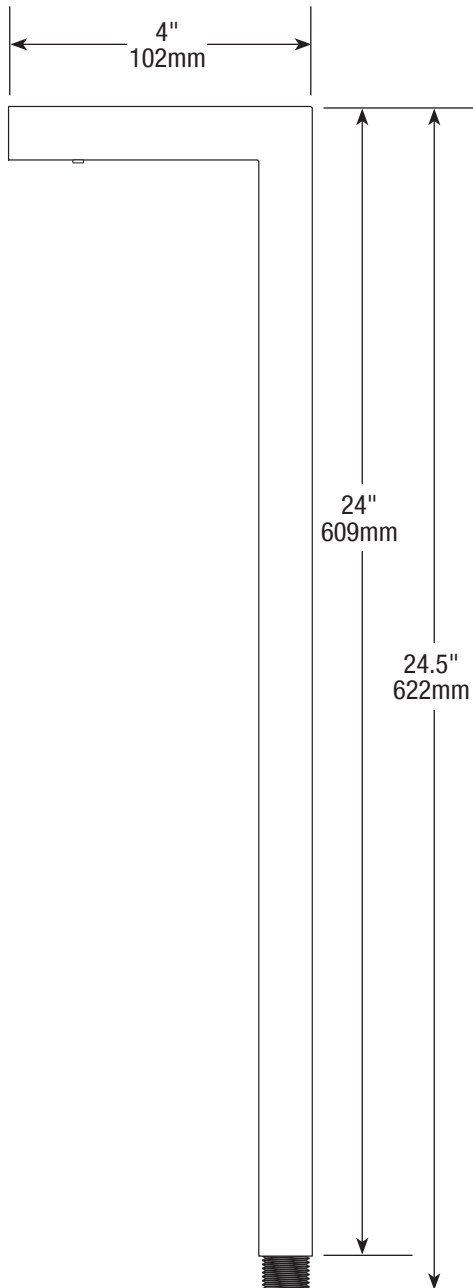

FRONT VIEW



BOTTOM VIEW

