

Wall Mounted Light

ILS-MW100-XX Half Moon Wall Mounted Light Specification Sheet



I R R A D I A R
L A N D S C A P E

PRODUCT OVERVIEW

These Irradiar Wall Lights by GM Lighting are premium-grade, luminaires designed as marker lights to deliver a small pool of illumination at specific points along paths or to highlight low areas. Engineered for both performance and durability, these fixtures feature robust construction that will last for years. This classic, low-profile design delivers a soft downlight glow that complements a variety of architectural styles.

FEATURES

- 3.3" wide die-cast housing
- Matte Black finish for a modern architectural appearance
- Accepts G4 LED lamp (MAX 3W)
- Clear glass lens provides, defined illumination
- Silicone O-ring and wall gasket for weather-resistance
- 6ft Direct Burial Cable, 18AWG

SPECIFICATIONS

ELECTRICAL

- 12V (nominal) low voltage
- 3W G4 (max lamp wattage)

WARRANTY

- 10 years (visit: gmlighting.net/warranty)

Project Name	Type
Catalog #	Date



ORDERING INFORMATION (STEP 1-3):

1. SELECT FIXTURE

Product No.	Description
ILS-WM100-AB	Antique Brass Half Moon Downlight
ILS-WM100-BK	Antique Black Half Moon Downlight

2. SELECT A COMPATIBLE GM LAMP

G4 (WP series, Water Protection): WHITE | G4 (Damp Location): WHITE

Watts	CCT	Lumens	WP series	Damp Location
2W	2700K	180lm	LG427K-02W0MWP	LG427K-02W01S
	3000K	180lm	LG430K-02W0MWP	LG430K-02W01S
	4000K	180lm	LG440K-02W0MWP	LG440K-02W01S
3W	2700K	270lm	LG427K-03W0MWP	LG427K-03W01S
	3000K	270lm	LG430K-03W0MWP	LG430K-03W01S
	4000K	270lm	LG440K-03W0MWP	LG440K-03W01S

NOTE: Lamps must be used in an outdoor rated luminaire for landscape applications.

Wall Mounted Light

ILS-MW100-XX Half Moon Wall Mounted Light Specification Sheet



I R R A D I A R
L A N D S C A P E

3. SELECT COMPATIBLE POWER SUPPLY


Fixtures must be used with 12V nominal power supply. See transformers specification sheets for details, controls and related accessories.

Product No.	Watts	Voltage
ILS-S075A-SS	75W	120Vin, 12/15Vout
ILS-S150B-SS	150W	120Vin, 12/13/14/15Vout
ILS-S300B-SS	300W	120Vin, 12/13/14/15/17/18/22Vout
ILS-S600B-SS	600W (2X300W)	120Vin, 12/13/14/15/17/18/22Vout
ILS-S100C-PC	100W	120Vin, 12/15Vout




DIMENSIONS


FRONT

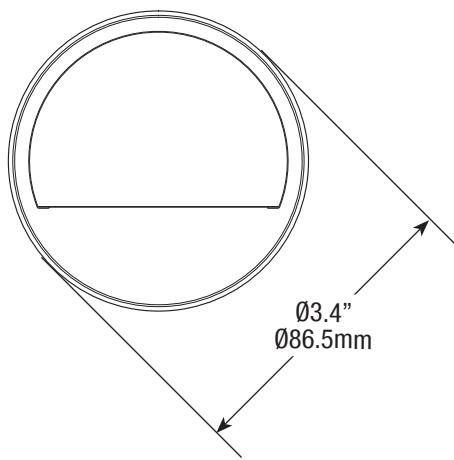

BOTTOM VIEW

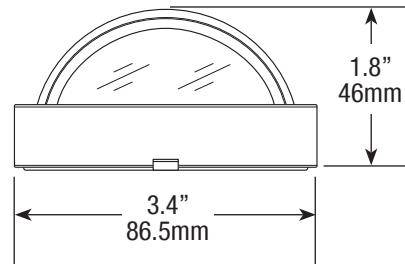

BACK

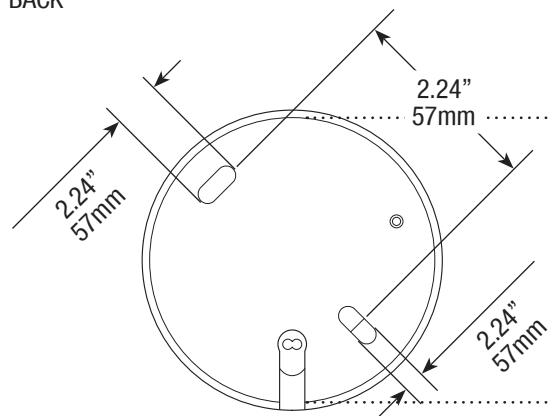

BACK GASKET

Place silicone gasket between fixture and mounting surface

