
LED Non-Dimmable Mini Driver

12VDC 8W MINI CASE
Constant Voltage Power Supply

Project Name	Type
Catalog #	Date

PRODUCT OVERVIEW

The LD-E-UNV8-12 is a 12V non-dimming driver designed to power small DC devices and LED loads. It is specifically for use to power our DMX Wall Controllers.

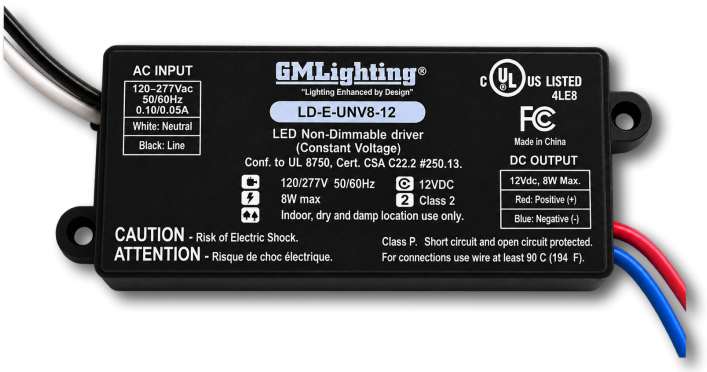

FEATURES

- Output constant voltage
- Non-Dimming
- Class 2 low voltage output
- IP20 design for dry and damp location

SPECIFICATIONS

ELECTRICAL
- Input: 120/277VAC, 50/60Hz
- Output: 12VDC, 8W max

HOUSING
- Black plastic with flying leads

ENVIRONMENT
- Store in a dry location

OPERATING TEMP
- -40 to 140F (-40 to 60C) ambient

CERTIFICATION
- FCC
- UL recognized for US and Canada
- Class 2

PROTECTION
- Over voltage, over current, and short circuit protection
- Hiccup mode, recover automatically after fault condition is removed

WARRANTY
- 5-year warranty

ORDERING INFORMATION

Example: LD-E-UNV8-12

Model	-	Series	-	Watts	-	Voltage
LD		E		UNV8		12


©2026 GM LIGHTING, LLC • www.gmlighting.net • Specifications subject to change without notice
18700 Ridgeland Ave., Tinley Park, IL 60477 • Toll-Free: (866) 671-0811 FAX: (708) 478-2640 • tech@gmlighting.net

LED Non-Dimmable Mini Driver

12VDC 8W MINI CASE
Constant Voltage Power Supply

Model	Output	Input	Power Factor	Efficiency @ 120V	Weight	Size (L*W*H)
LD-E-UNV8-12	12VDC, 8W MAX	120VAC, 50/60Hz	> 0.9 (80-100% Load)	81%	0.20lbs (91g)	3.32"L x 1.32"W x 0.83"H (84.3*33.5*21mm)


DIMENSIONS

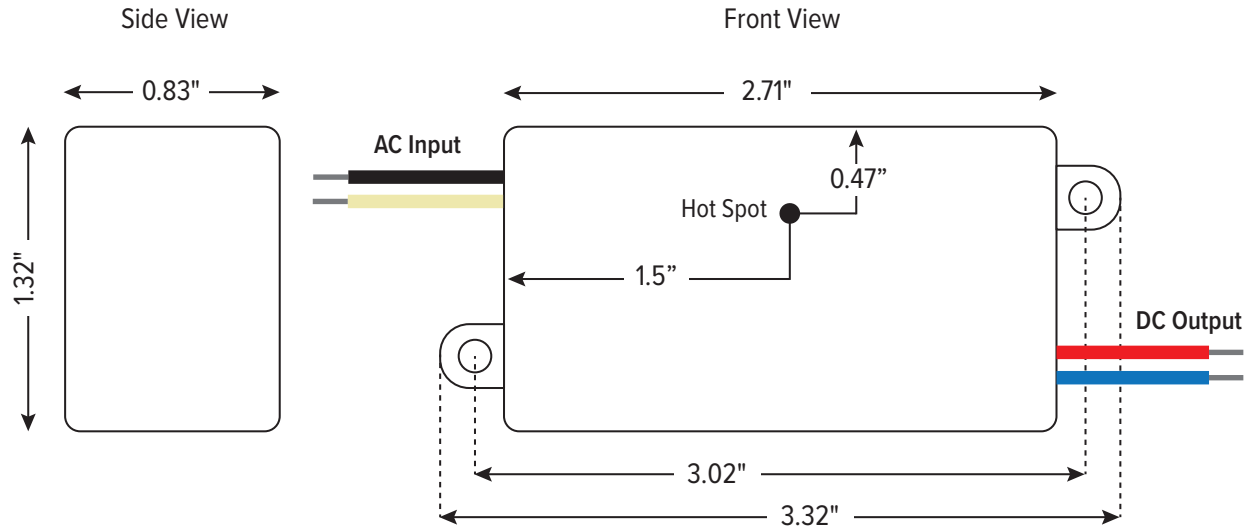

WIRING DIAGRAM

Diagram shows the LD-E-UNV8-12 Mini Driver connected to the back of a DMX Wall Controller. Powers any of the WCx series wall plates.

Please see DMX Deocder product page Wiring Diagrams under Instructions for more detailed wiring diagrams.

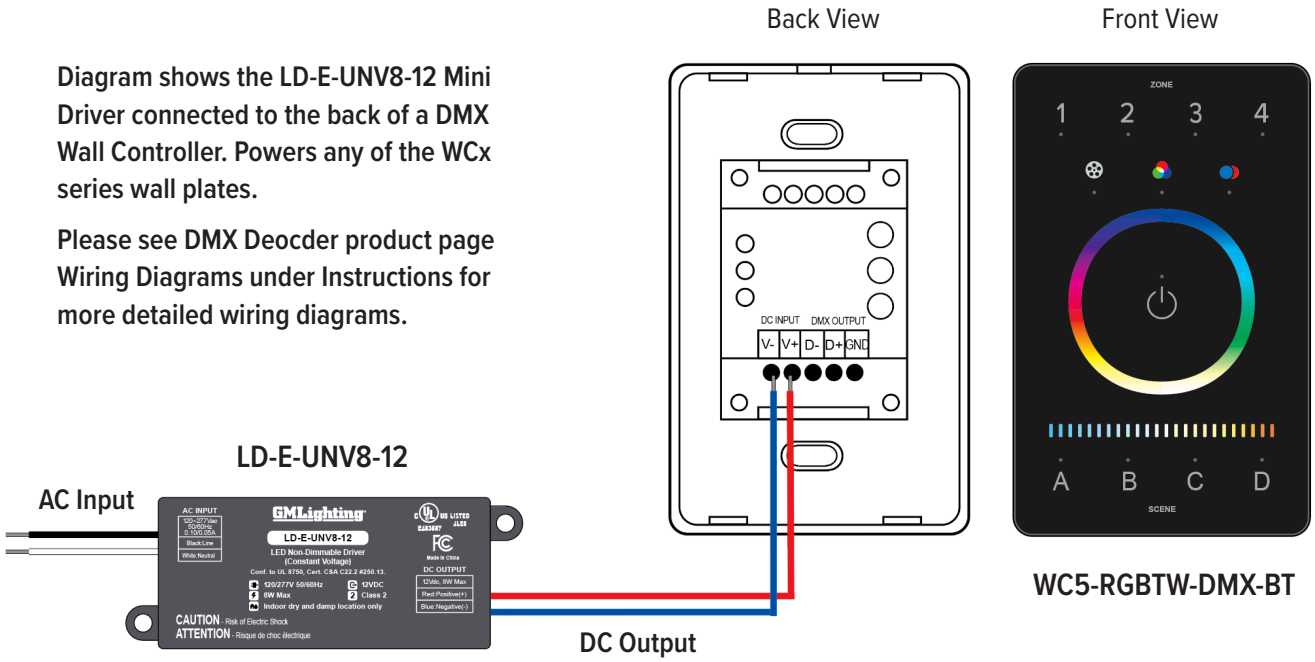

©2026 GM LIGHTING, LLC • www.gmlighting.net • Specifications subject to change without notice

18700 Ridgeland Ave., Tinley Park, IL 60477 • Toll-Free: (866) 671-0811 FAX: (708) 478-2640 • tech@gmlighting.net