

# XENON LumenTask™ UNDERCABINET LIGHTING

## UNDERCABINET LIGHTING SPECIFICATION SHEET - 12V XENON

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact Phone: \_\_\_\_\_

### PRODUCT DESCRIPTION

LumenTask 12V undercabinet lighting fixtures with integral electronic transformer powers 12V xenon lamps that deliver excellent color rendition and maximum light output along with long lamp life. The unique housing and reflector system features an Open Wide™ hinged system that affords hands-free re-lamping and maintenance. LumenTask is rapidly becoming the preferential undercabinet lighting system for residential lighting applications.

### PRODUCT SPECIFICATIONS

**Housing Construction:** One-piece, low profile (1-3/8" height) die-formed 18 gauge cold rolled steel housing with aluminum reflector and die cast end caps. Mounting holes with pre-affixed screws for easy alignment and installation. Multiple vents for cool undercabinet operation. White, bronze, powder coat paint and solid stainless steel finish.

**Electrical:** Wire mold knock-outs on end caps for through wiring (utilizing LumenTask EZ Connectors) of multiple units. Hi-low-off switch. Xenon lamp is 18-Watt, G6.35 base with 10,000 hr. lamp life at 3000°K. Lamps utilize a unique ceramic base.

**Dimming:** Use dimmer specifically designated for use with electronic low voltage transformer.

**Reflector:** Anodized aluminum mirrored reflector.

**Diffuser:** Tempered prismatic frosted glass lens that slides in for easy installation. Spring loaded retention clip holds lens securely in place.

**Installation:** Must be installed a minimum of 2" from back of cabinet to allow for proper ventilation.

**Label:** UL listed.

### OPEN WIDE FEATURE

Accessing the interior of LumenTask without dismounting is easy. Our Open Wide design keeps the fixture open and your hands free to wire. By simply pressing the wire compartment holding tab, the wiring compartment cover swings down and out, and stays in position until you're ready to snap it back in its closed position, and slide the lens back in place.

### PRODUCT SPECIFICATION NUMBERS

Catalog No.	Finish	Lamp
X8-12-WH	White	1 - 18W
X8-12-BZ	Bronze	1 - 18W
X8-12-SS	Stainless Steel	1 - 18W
X16-12-WH	White	2 - 18W
X16-12-BZ	Bronze	2 - 18W
X16-12-SS	Stainless Steel	2 - 18W
X24-12-WH	White	3 - 18W
X24-12-BZ	Bronze	3 - 18W
X24-12-SS	Stainless Steel	3 - 18W
X32-12-WH	White	4 - 18W
X32-12-BZ	Bronze	4 - 18W
X32-12-SS	Stainless Steel	4 - 18W


### ACCESSORIES

Catalog No.	Description
EZ-1	EZ connector (connects two fixtures)
EZ-3	3" interconnect modular cable
EZ-6	6" interconnect modular cable
EZ-12	12" interconnect modular cable
CP-6	6' modular cord and plug for wall outlet
JB-1	Junction box - 4 knock-outs 4"L x 2"W x 1-5/8"H

NOTE: All EZ connectors are three wire.

### DIMENSIONS

Model	Length	Width	Height	Knock-outs
X8	8"	4-3/8"	1-3/8"	6 x 1/2"
X16	16"			10 x 1/2"
X24	24"			14 x 1/2"
X32	32"			18 x 1/2"

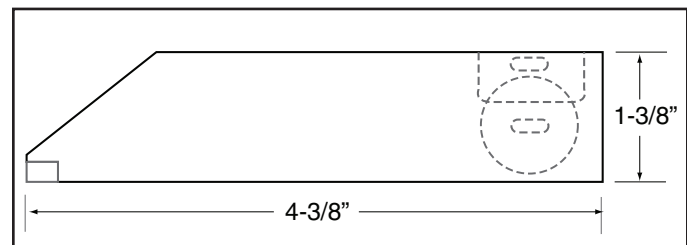

**GMLighting**

9830 W. 190th Street • Unit F • Mokena, IL 60448 • www.gmlighting.net

Toll-Free: (866) 671-0811 FAX: (708) 478-2640

e-mail: gmlightingllc@sbcglobal.net • Specifications subject to change without notice. Patent pending

lumentask12V\_032210