

SMART HOME 120V 2.4Ghz WIFI WALL SWITCH DIMMER

"Lighting Enhanced by Design"



PRODUCT DESCRIPTION

GM Lighting's SHD-WiFi Dimmer replaces standard in-wall dimmer switch and enables user to control lights from anywhere using Amazon Alexa / Google Home voice control service. Also compatible with Phillips Hue Hub / Bridge and Hue App. Works with existing single / double / multi-switch rocker-style plates.

3-in-1 ways to control your lights -**VOICE, APP and WALL SWITCH**

PROJECT TYPE

CATALOG NUMBER (FOR CUSTOM LENGTHS, PLEASE SEE ORDERING EXAMPLE BELOW)

FEATURES

- 120V operation
- 180W max. load
- Control lights with Amazon Alexa® and Google Home® voice control service
- Decora® face plate
- 15M transmission distance
- ZigBee 2.4G wireless sensor network
- Compatible with Phillips Hue Hub / Bridge and Hue App
- · Works with any dimmable LED, CFL, Incandescent and halogen fixtures
- IP20 rating

ELECTRICAL

- 110-240VAC / 50-60Hz
- 1.5A max.

LABEL

- UL
- ETL

WARRANTY

5 year warranty

COMPATIBLE WITH 2.4Ghz WIFI ONLY

NOTE: Not compatible with Smart Lamp bulbs, or the following: Magnetic Power supplies, 12VDC-GMR4, 12VDC-GMR6 and SDP-3. Dimming range may vary depending on Product, always verify performance before permanent installation.












DIAGRAM

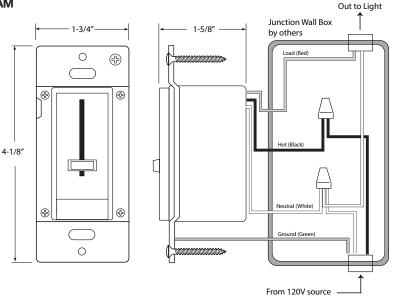

ORDERING INFORMATION

Catalog No.	Wattage	Length	Width	Depth	Wi-Fi Compatability	Warranty
SHD-WL	180W max.	4-1/8"	1-3/4"	1-5/8"	Alexa®, Google Home, Phillips Hue	1 year

