

**2W 12V AC/DC LED
OUTDOOR PAVERBRICK™**

by **GM Lighting**

Project: _____

Type: _____

Location: _____

Contact Phone: _____

PRODUCT DESCRIPTION

Unique 12V 2W LED PaverBrick that enables visible perimeter and accent lighting in a sturdy synthetic resin embedded 'brick'.

PRODUCT SPECIFICATIONS

Construction: LED PaverBrick features a load-bearing polymerconcrete shell that withstands passenger vehicle drive overs. Integral asphalt pad extends around translucent polymer-concrete shell enabling fixture to be installed in hard or soft-scape without mortar. 18 LEDs are encased in a synthetic resin envelope and lasts for up to 50,000 hours making this an energy saving addition to your landscape and/or perimeter lighting.

Electrical: 12V VAC/DC input voltage at 50/60Hz. Total wattage is >2W.


Color Temperature: 3200K (±200) Warm White

Power Supply: Requires remote power supply, see below.


Dimming: Dimmable power supplies available. See below.

Mounting: Integral asphalt pad enables enough ballast weight to simply place in position without mortar or anchoring hardware. Additionally, this mounting method creates an even joint with hardscape surfaces and prevents movement resulting in shattering from overhead traffic.


Label: ETL listed for wet location.

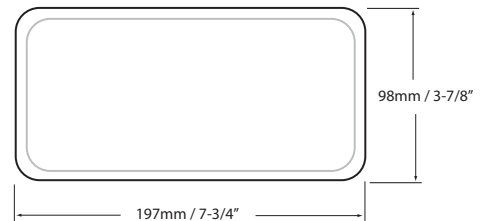

OVERHEAD

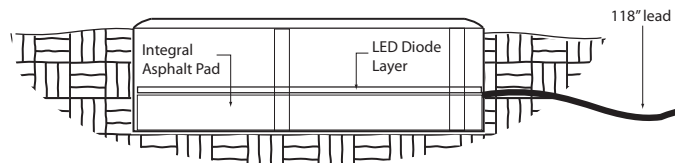

IN GRADE SIDE VIEW

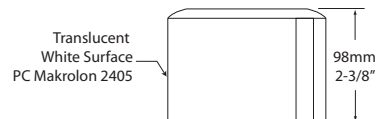

END VIEW

LED ELECTRONIC AND MAGNETIC DIMMABLE POWER SUPPLIES

Catalog No.	Description
LTP-2	2 Amp Electronic Switchable, 120V Cord & Plug
LTP-6	6 Amp Electronic Switchable, 120V Cord & Plug
LTH-8	Commercial Electronic 8.5 Amp / 100W
LTH-16	Commercial Electronic 16.7 Amp / 200W
LTH-25	Commercial Electronic 25 Amp / 320W
LTHM50-DIM	120V / 50W Magnetic Dimmable - ETL Rated
LTH-60-DIM	120V / 60W Magnetic Dimmable - ETL Rated
LTHM100-DIM	120V / 100W Magnetic Dimmable - ETL Rated

PRODUCT ORDERING DETAIL

Catalog Number	Color	Total LED's	Total Wattage	Input Voltage	Weight	LED Life
LTBR-18-WW	3200K Warm White	18	>2W	12 VAC/DC 50/60Hz	2.2 lbs.	50,000 hrs

GM Lighting

GM Lighting, LLC • 9830 W. 190th St. • Unit F • Mokena, IL 60448
Toll-Free: (866) 671-0811 FAX: (708) 478-2640 • www.gmlighting.net
e-mail: gmlightingllc@sbcglobal.net • Specifications subject to change without notice. LTBR_032210

