

2W Standard Output
Vision120 LED Tape

PROJECT	TYPE
CATALOG NUMBER (FOR CUSTOM LENGTHS, PLEASE SEE ORDERING EXAMPLE BELOW)	

FEATURES

- 120V operation (no power supply required)
- Wet location - IP67
- 90+ CRI
- Cord and plug or hardwire power connector
- Tape encased in water resistant clear poly flexible sheath
- Dimmable with ELV/Triac
- 2700K, 3000K or 4000K
- Blue, Red, Green and Amber
- 120° viewing angle
- Not field cuttable. Cuttable by factory in 1 foot increments
- Maximum run: 150'
- Uses mounting clips or PVC or aluminum channel - frosted lens available (see below)

ELECTRICAL

- 120VDC
- Rated LED life: 50,000 hrs.

LABEL

- ETL
- IP67

WARRANTY

- 5 year warranty

PRODUCT DESCRIPTION

A standard output, wet location flexible 120V plug-in or hardwire LED linear tape for architectural coves, indoor steps, bannisters, exterior recesses and other constructs where even, energy saving LED illumination is specified. Factory cut only. 5 year warranty. Do not submerge. High output available.

Factory cut only - cutting in field will void ETL label and warranty.

NOTE: Each run requires power feed (see Connectors and Accessories below)

Ordering Example:


V120-S0-30-XXX

COLOR
TEMP

FEET
ONLY



DIAGRAM

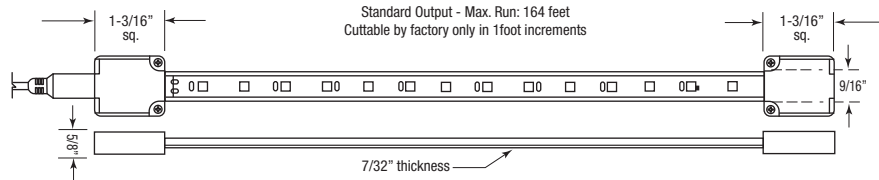

HOW TO SPECIFY VISION120 AND CREATE A CATALOG NUMBER

Standard Output (164' Max.)

Specify by the foot only (no inches).

Example: To order an 8' length of 3000K tape, specify: **V120-S0-30-8**

Example: To order an 72' length of 4000K tape, specify: **V120-S0-40-72**

Example: To order an 112' length of 2700K tape, specify: **V120-S0-27-112**

ORDERING INFORMATION

Catalog No.	Output	Length	LED Wattage	Lumens per Foot	Color Temp.*	CRI	LED Life
V120-S0-27-XXX	Standard	Custom to 164'	2W / FT.	140	2700K	90+	50,000 hrs.
V120-S0-30-XXX	Standard	Custom to 164'	2W / FT.	150	3000K	90+	50,000 hrs.
V120-S0-40-XXX	Standard	Custom to 164'	2W / FT.	160	4000K	90+	50,000 hrs.
V120-S0-RD-XXX	Standard	Custom to 164'	2W / FT.	N/A	Red	N/A	50,000 hrs.
V120-S0-GR-XXX	Standard	Custom to 164'	2W / FT.	N/A	Green	N/A	50,000 hrs.
V120-S0-BL-XXX	Standard	Custom to 164'	2W / FT.	N/A	Blue	N/A	50,000 hrs.
V120-S0-AM-XXX	Standard	Custom to 164'	2W / FT.	N/A	Amber	N/A	50,000 hrs.

* Kelvin temperature (color) ± 200K

CONNECTORS AND ACCESSORIES

Catalog No.	Description
V120-PC-4	4' POWER CONNECTOR - CORD AND PLUG
V120-PC-8	8' POWER CONNECTOR - CORD AND PLUG
V120-PCHW-8	8' POWER CONNECTOR - HARDWIRE
V120-TTC-6	6" TAPE TO TAPE FLEXIBLE CONNECTOR
V120-TTC-12	12" TAPE TO TAPE FLEXIBLE CONNECTOR
V120-TTC-24	24" TAPE TO TAPE FLEXIBLE CONNECTOR
V120-3M-VHB-15	15" LONG X 1/2" WIDTH DOUBLE-SIDED MOUNTING TAPE

Catalog No.	Description
V120-CHL-4	4' ALUMINUM MOUNTING CHANNEL - LENS SOLD SEPARATELY
V120-CHL-4-LENS	FROSTED LENS FOR 4' ALUMINUM CHANNEL
V120-CHL-8	8' ALUMINUM MOUNTING CHANNEL - LENS SOLD SEPARATELY
V120-CHL-8-LENS	FROSTED LENS FOR 8' ALUMINUM CHANNEL
V120-CHL-P-4	VISION120 4' PVC MOUNTING CHANNEL (LENS NOT AVAILABLE)
V120-CHL-P-8	VISION120 8' PVC MOUNTING CHANNEL (LENS NOT AVAILABLE)
V120-MC	VISION120 MOUNTING CLIPS - USE 1 PER FOOT MIN. (BAG OF 10)