GMLighting®
"Lighting Enhanced by Design"

Vision120 90+ CRI Flexible LED Tape
Wet Location Super High Output

Super High Output
6W per foot

Ordering Example: COLOR TEMP | FEET | INCHES

V120-SHO-30-XX-X

PRODUCT OVERVIEW

A super high output, wet location flexible 120V plug-in or hardwire LED linear tape for architectural coves, indoor steps, bannisters, exterior recesses and other constructs where even, energy saving LED illumination is specified. 5 year warranty. Do not submerge.

Factory cut only - cutting in field will void ETL label and warranty.

NOTE: Each run requires power connector (see Connectors and Accessories below).

KEY FEATURES

- 120V operation (no power supply required)
- Wet location - IP65
- 90+ CRI
- Cord and plug or hardwire power connector
- Tape encased in UV inhibiting water resistant clear poly flexible sheath
- Dimmable (ELV/Triac - Lutron - Skylark - Selv-300P)
- 2700K, 3000K, 4000K
- 120° viewing angle
- Not field cuttable. Cuttable by factory in 4 inch increments
- Maximum run: 59 feet
- Uses mounting clips or PVC or aluminum channel - frosted lens available (see below)

ELECTRICAL

- 120V

LABEL

- ETL
- IP65

WARRANTY

- 5 year warranty

HOW TO SPECIFY VISION120 AND CREATE A CATALOG NUMBER

Super High Output (59' Max.)
Specify by the foot and inches (in multiples of four - minimum cut is 4". Vision120 is available by the foot + 4" or 8".

Example: To order an 8' length of 2700K tape, specify: V120-SHO-27-8

Example: To order a 24'-8" length of 3000K tape, specify: V120-SHO-30-24-8

Example: To order a 58'-4" length of 4000K tape, specify: V120-SHO-40-58-4

V120 state of the art connectors insuring a professional connection.

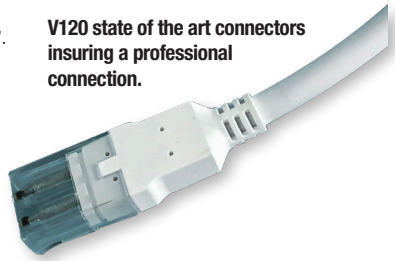

120 VOLT | WET LOCATION | 90+ CRI | NOT FIELD CUTTABLE | DIM | IP 65 | 5 Yr. WARRANTY | ETL US Intertek

PRODUCT ORDERING

Catalog Number	Length	Wattage	Lumens	Color Temp.
V120-SHO-27-XX-X	Custom to 59'	6W / FT.	500 / FT.	2700K
V120-SHO-30-XX-X	Custom to 59'	6W / FT.	515 / FT.	3000K
V120-SHO-40-XX-X	Custom to 59'	6W / FT.	530 / FT.	4000K

CONNECTORS AND ACCESSORIES

Catalog No.	Description
V120-PC-4	4' POWER CONNECTOR - CORD AND PLUG
V120-PC-8	8' POWER CONNECTOR - CORD AND PLUG
V120-PCHW-4	4' POWER CONNECTOR - HARDWIRE
V120-PCHW-8	8' POWER CONNECTOR - HARDWIRE
V120-TTC-6	5-3/8" TAPE TO TAPE FLEXIBLE CONNECTOR
V120-TTC-12	12-1/2" TAPE TO TAPE FLEXIBLE CONNECTOR
V120-TTC-18	15-1/2" TAPE TO TAPE FLEXIBLE CONNECTOR
V120-TTC-24	23-1/4" TAPE TO TAPE FLEXIBLE CONNECTOR
V120-3M-VHB-15	15" LONG X 1/2" WIDTH DOUBLE-SIDED MTG. TAPE
V120-CHL-4	4' ALUMINUM MOUNTING CHANNEL - LENS SOLD SEPARATELY
V120-CHL-4-LENS	FROSTED LENS FOR 4' ALUMINUM CHANNEL
V120-CHL-8	8' ALUMINUM MOUNTING CHANNEL - LENS SOLD SEPARATELY
V120-CHL-8-LENS	FROSTED LENS FOR 8' ALUMINUM CHANNEL
V120-CHL-P-4	VISION120 4' PVC MOUNTING CHANNEL (LENS NOT AVAILABLE)
V120-CHL-P-8	VISION120 8' PVC MOUNTING CHANNEL (LENS NOT AVAILABLE)
V120-MC	VISION120 MOUNTING CLIPS - USE 1 PER FOOT MIN. (BAG OF 10)
V120-ECC	END CAP COVERS (2) FOR ALUMINUM CHANNEL WITH LENS. WHITE
V120-90C	VISION120 90° CONNECTOR (INDOOR ONLY)

PRODUCT DIAGRAM

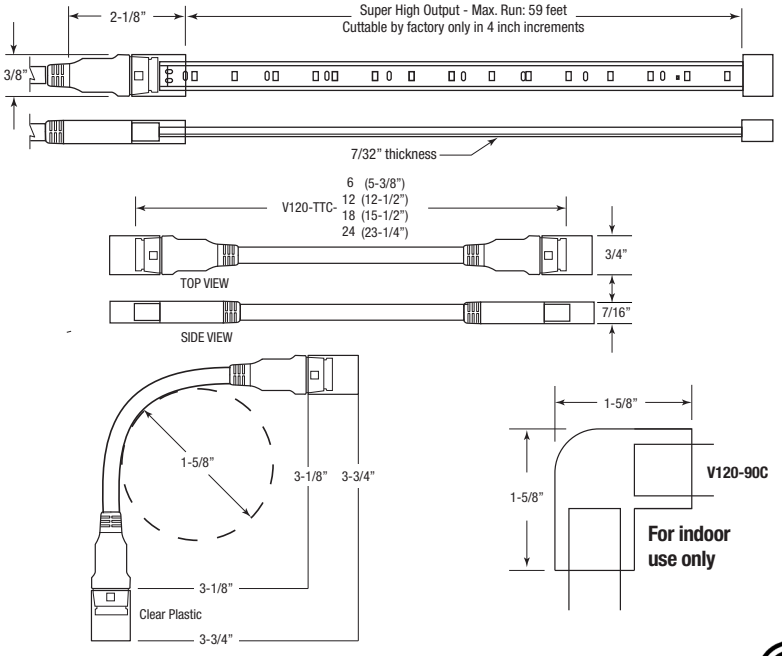

GMLighting®
"Lighting Enhanced by Design"

©2019 GM LIGHTING, LLC • www.gmlighting.net • e-mail: tech@gmlighting.net • Specifications subject to change without notice
18700 Ridgeland Ave., Tinley Park, IL 60477 • Toll-Free: (866) 671-0811 FAX: (708) 478-2640 V120-SHO_071420

ETL US Intertek