Surface Mount Downlight

120V S4 Series Specification Sheet
4” Low Profile Disk

GMLighting®

Project Name	Type
Catalog #	Date

120 VOLT | INDOOR WET LOCATION | CLOSET | TITLE 24 | Intertek | 5 Yr. WARRANTY

PRODUCT OVERVIEW

These circular surface mount downlights are closet rated for use throughout residential or commercial sites. Constructed of a high quality aluminum body with translucent white polycarbonate diffuser for low glare and durability. S4 luminaires are versatile and provide high quality illumination which meets Title 24/JA8 requirements.

FEATURES

- 5CCT selection switch
- Dimmable, ELV, Triac dimmers
- Mounts to standard 4” outlet box (requires mounting kit, S4-RKT). Also mounts to a shallow box

SPECIFICATIONS

ELECTRICAL

- 120V (power supply not required)
- 12W

CERTIFICATION

- ETL
- Closet Rated: Complies with NEC code (NFPA70) 410.16, Suitable for installation within a clothes closet storage space
- Title 24
- Ceiling Mount: Wet location, indoor covered ceiling only
- Wall Mount: Dry or damp location, indoor only, ADA compliant
- -4 to 122 F operating temp

WARRANTY

- 5 year warranty



APPLICATIONS

- General use
- Closets
- Pantries
- Hallways
- Bathroom
- Laundry Room

NOTE: Do not install in an environment outside the listed ambient temperature

ORDERING INFORMATION

Example: S4-TUN-WH

Model	Color Temp	Color
S4	**TUN**	**WH** (White)

PHOTOMETRIC INFORMATION

Catalog No.	Performance	Lumens Levels	2700K	3000K	3500K	4000K	5000K
S4-TUN-WH (5CCT)	**CRI: 90+ 120° beam angle**	**Lumens**	750	790	830	850	845
		Lumen Factor	0.95	1.00	1.05	1.08	1.07

ACCESSORIES

Catalog No.	Description
S4-RKT	Retrofit kit for S4 fixture. Includes all hardware and screw-in 120V adapter.


©2026 GM LIGHTING, LLC • www.gmlighting.net • Specifications subject to change without notice
18700 Ridgeland Ave., Tinley Park, IL 60477 • Toll-Free: (866) 671-0811 FAX: (708) 478-2640 • tech@gmlighting.net

Surface Mount Downlight


120V S4 Series Specification Sheet
4” Low Profile Disk

GMLighting®

FIXTURE BODY

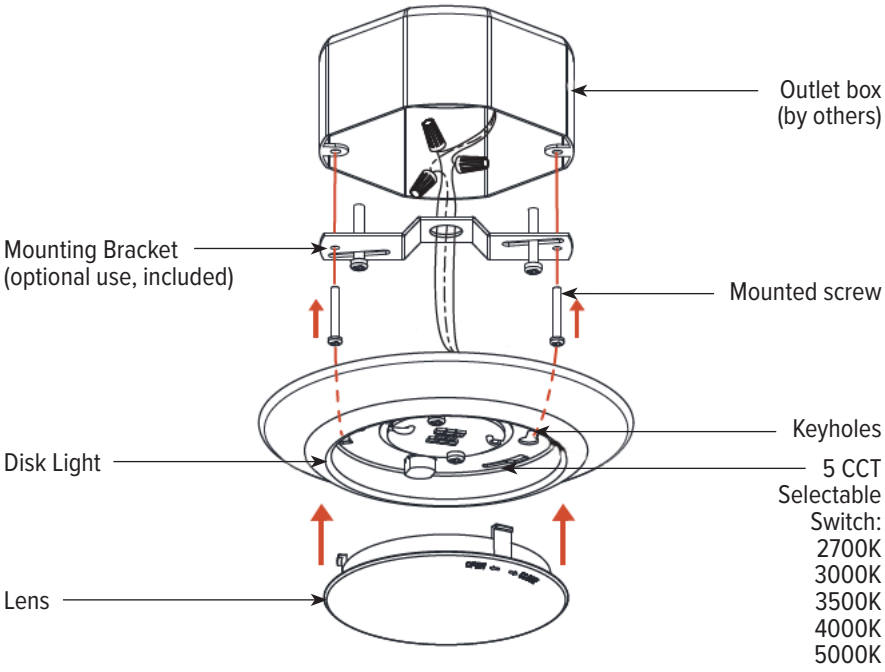

DIMENSIONS

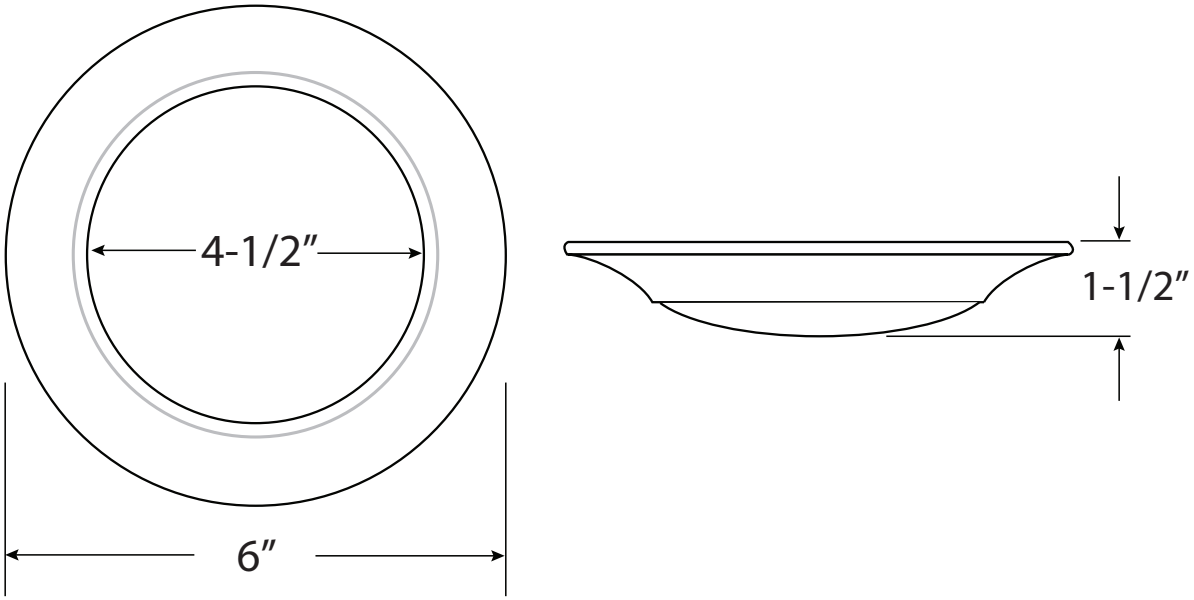

©2026 GM LIGHTING, LLC • www.gmlighting.net • Specifications subject to change without notice
18700 Ridgeland Ave., Tinley Park, IL 60477 • Toll-Free: (866) 671-0811 FAX: (708) 478-2640 • tech@gmlighting.net